



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 2 - Beaver [RO#152712]**  
Machine Id  
**JOHN DEERE 210G 1FF210GXCHF525223**  
Component  
**Right Propel Gearbox**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (2 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0051312</b>	LECP186597	---
Sample Date		Client Info		<b>09 Jul 2024</b>	12 Sep 2018	---
Machine Age	hrs	Client Info		<b>4051</b>	374	---
Oil Age	hrs	Client Info		<b>3677</b>	374	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>40</b>	210	---
Iron	ppm	ASTM D5185m	>1250	<b>69</b>	221	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	4	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m		<b>3</b>	4	---
Lead	ppm	ASTM D5185m		<b>0</b>	2	---
Copper	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>38</b>	37	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	---
Boron	ppm	ASTM D5185m	6	<b>7</b>	64	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	6	---
Molybdenum	ppm	ASTM D5185m	0	<b>4</b>	0	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	4	---
Magnesium	ppm	ASTM D5185m	145	<b>107</b>	1	---
Calcium	ppm	ASTM D5185m	3570	<b>3363</b>	7	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1033</b>	455	---
Zinc	ppm	ASTM D5185m	1640	<b>1181</b>	21	---
Sulfur	ppm	ASTM D5185m		<b>4505</b>	13602	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>58.5</b>	187.7	---

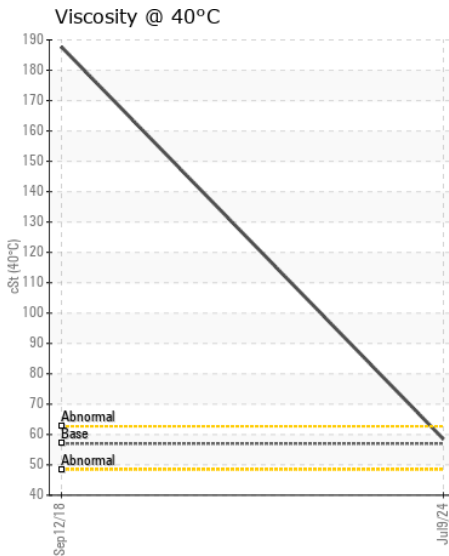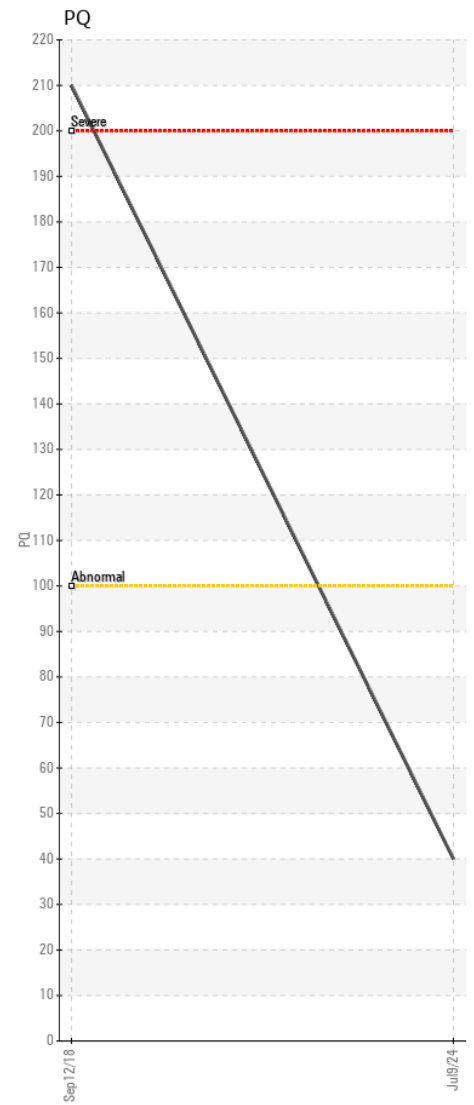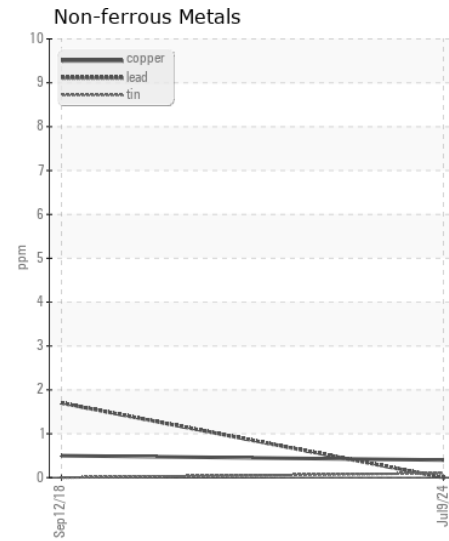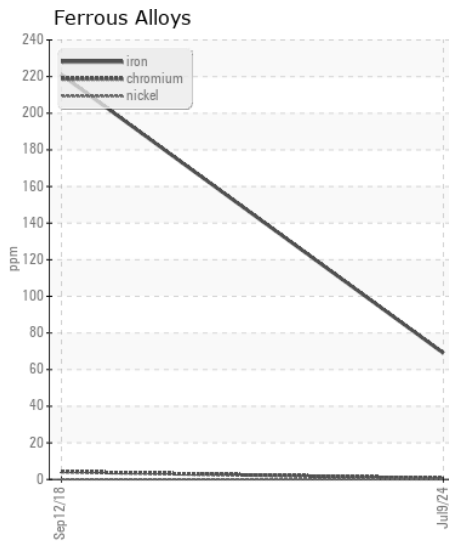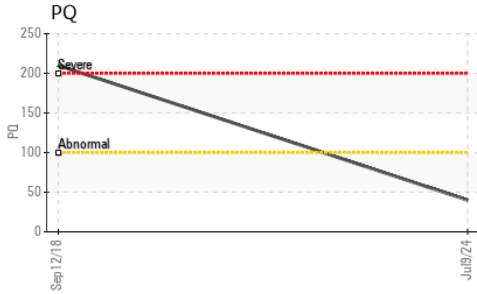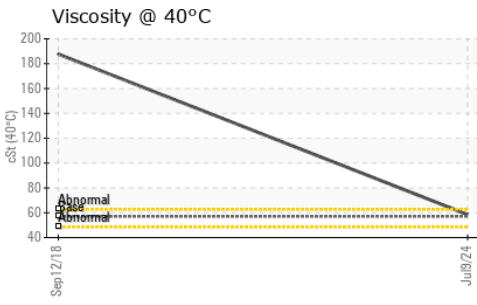

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0051312      **Received** : 11 Jul 2024  
**Lab Number** : 06234087      **Tested** : 12 Jul 2024  
**Unique Number** : 11122921      **Diagnosed** : 12 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**ASPEN CORP**  
 2400 RITTER DR  
 DANIELS, WV  
 US 25832

Contact: JASON ST CLAIR  
jstclair@aspengolf.com

T: (304)688-8753

F: