



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W/O 11061]

Machine Id
VOLVO Ecr145 E 317114

Component
Right Travel

Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (1 GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002063	---	---
Sample Date		Client Info		03 Jul 2024	---	---
Machine Age	hrs	Client Info		491	---	---
Oil Age	hrs	Client Info		491	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>500	127	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>100	2	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>60	<1	---	---
Tin	ppm	ASTM D5185m	>5	12	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>150	13	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	111	<1	---	---
Barium	ppm	ASTM D5185m	0.0	2	---	---
Molybdenum	ppm	ASTM D5185m	0.9	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	3	---	---
Magnesium	ppm	ASTM D5185m	39	1	---	---
Calcium	ppm	ASTM D5185m	93	4	---	---
Phosphorus	ppm	ASTM D5185m	920	305	---	---
Zinc	ppm	ASTM D5185m	104	16	---	---
Sulfur	ppm	ASTM D5185m	20179	16175	---	---
Visc @ 40°C	cSt	ASTM D445	333	137	---	---

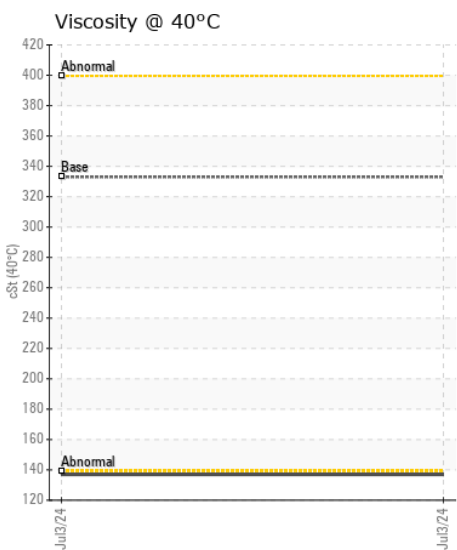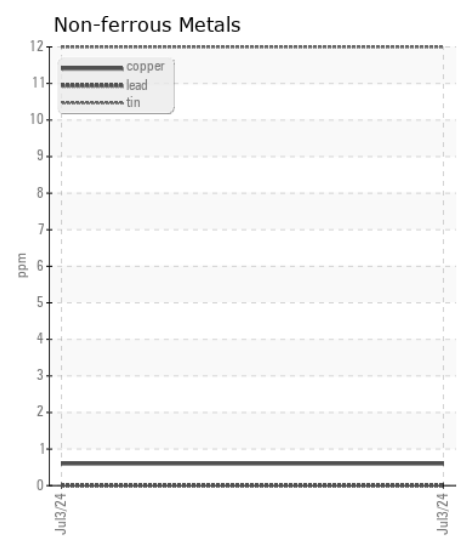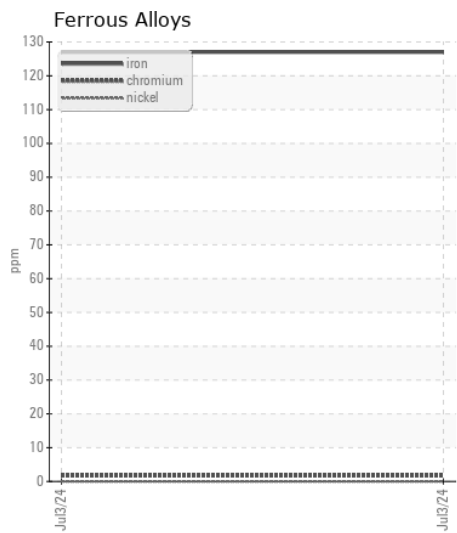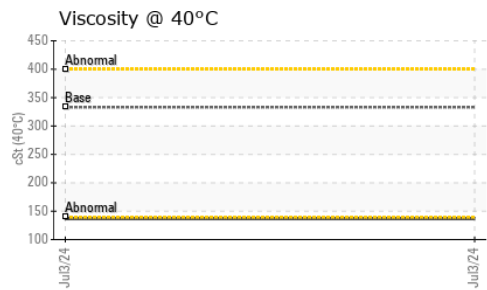

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002063
Lab Number : 06234092
Unique Number : 11122926
Test Package : CONST
Received : 11 Jul 2024
Tested : 12 Jul 2024
Diagnosed : 14 Jul 2024 - Don Baldrige

RELIABLE CONTRACTING
 2410 EVERGREEN RD SUITE 200
 GAMBRILLS, MD
 US 21054
 Contact: RUSSELL HATFIELD
 RHATFIELD@RELIABLECONTRACTING.COM
 T: (410)987-1851
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)