



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO EC750E 314256
Component
Right Travel
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002199	---	---
Sample Date		Client Info		26 Jun 2024	---	---
Machine Age	days	Client Info		472	---	---
Oil Age	days	Client Info		472	---	---
Filter Age	days	Client Info		472	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	250	---	---
Chromium	ppm	ASTM D5185m	>20	3	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>100	2	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>60	1	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>150	10	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	111	0	---	---
Barium	ppm	ASTM D5185m	0.0	11	---	---
Molybdenum	ppm	ASTM D5185m	0.9	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	4	---	---
Magnesium	ppm	ASTM D5185m	39	2	---	---
Calcium	ppm	ASTM D5185m	93	6	---	---
Phosphorus	ppm	ASTM D5185m	920	329	---	---
Zinc	ppm	ASTM D5185m	104	8	---	---
Sulfur	ppm	ASTM D5185m	20179	15714	---	---
Visc @ 40°C	cSt	ASTM D445	333	171	---	---

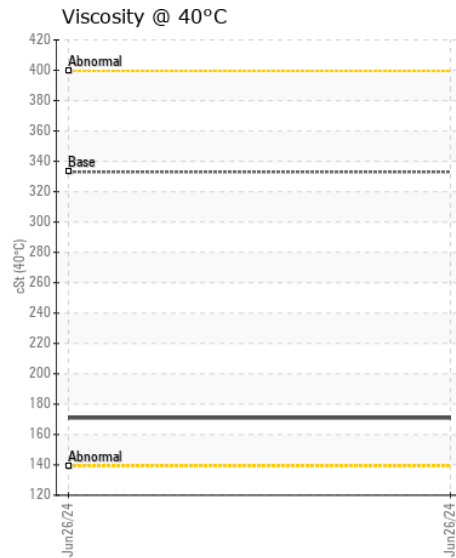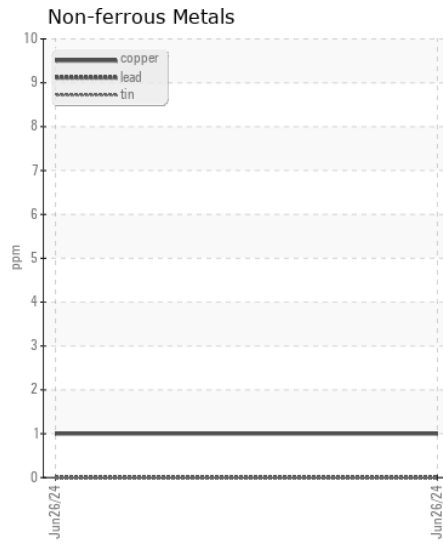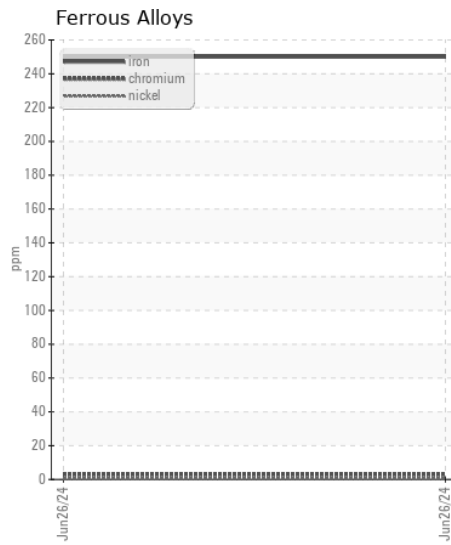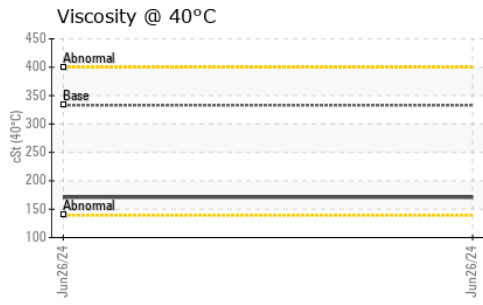

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002199
Lab Number : 06234098
Unique Number : 11122932
Test Package : CONST

Received : 11 Jul 2024
Tested : 12 Jul 2024
Diagnosed : 14 Jul 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE
 4601 WASHINGTON BOULEVARD
 BALTIMORE, MD
 US 21227

Contact: MARK CIULLA
 mciulla@mcclung-logan.com

T: (410)242-6500
 F: (410)242-7835

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)