



OIL ANALYSIS REPORT

WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
ABNORMAL
NORMAL

Machine Id
H/R JAW CRUSHER 5011 BARREL
Component
Gearbox
Fluid
SHELL OMALA S2 G 220 (45 GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

FLUID CONDITION












The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0921841	WC0921829	WC0891248
Sample Date		Client Info		26 Jun 2024	25 Apr 2024	31 Jan 2024
Machine Age	hrs	Client Info		20838	20533	20257
Oil Age	hrs	Client Info		324	506	719
Filter Age	hrs	Client Info		324	506	719
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

Iron	ppm	ASTM D5185m	>200	85	74	114
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		2	2	2
Silver	ppm	ASTM D5185m		<1	<1	0
Aluminum	ppm	ASTM D5185m	>25	18	17	33
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>200	2	1	0
Tin	ppm	ASTM D5185m	>10	0	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>50	57	61	111
Potassium	ppm	ASTM D5185m	>20	6	6	9
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		3	5	11
Boron	ppm	ASTM D5185m	4.4	2	2	2
Barium	ppm	ASTM D5185m	0.0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	0
Manganese	ppm	ASTM D5185m		<1	1	2
Magnesium	ppm	ASTM D5185m	0	4	4	8
Calcium	ppm	ASTM D5185m	0	2	15	19
Phosphorus	ppm	ASTM D5185m	215	328	333	317
Zinc	ppm	ASTM D5185m	0	3	0	0
Sulfur	ppm	ASTM D5185m	7039	10603	13196	10754
Visc @ 40°C	cSt	ASTM D445	220	204	204	189

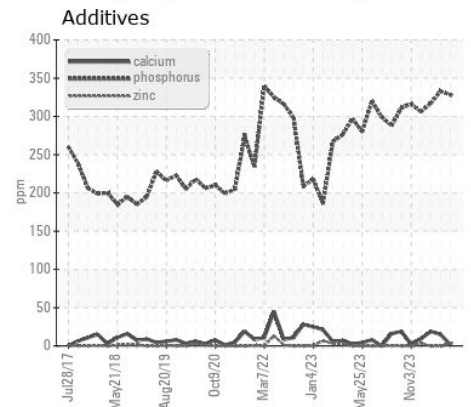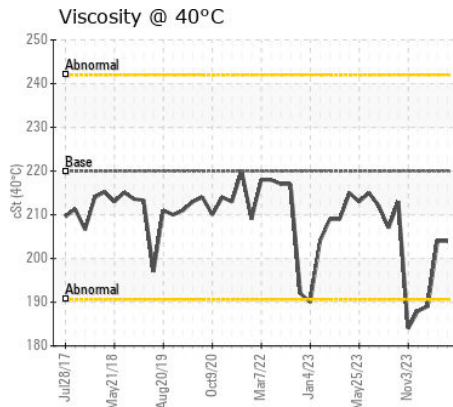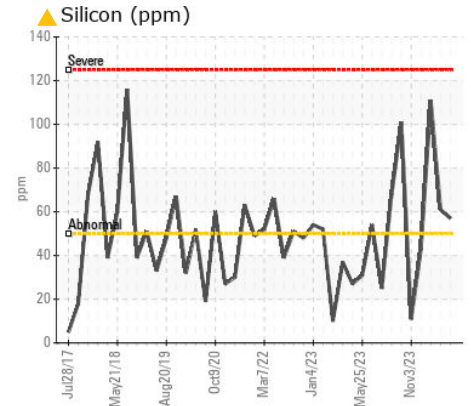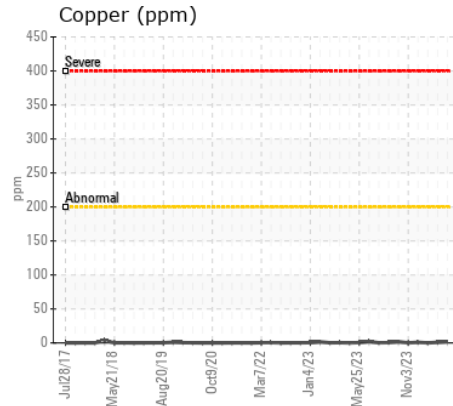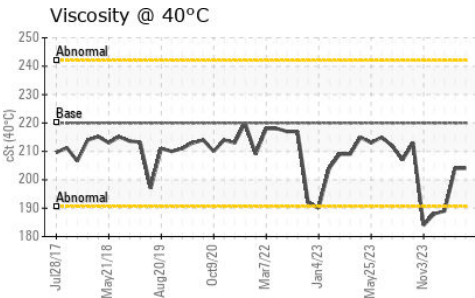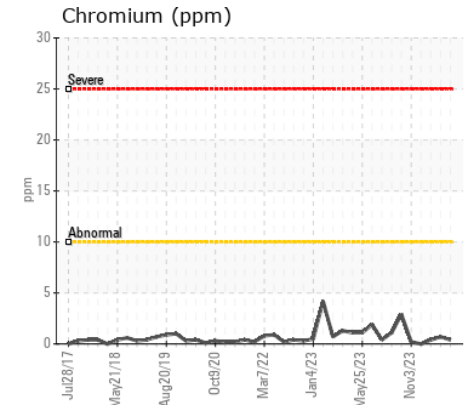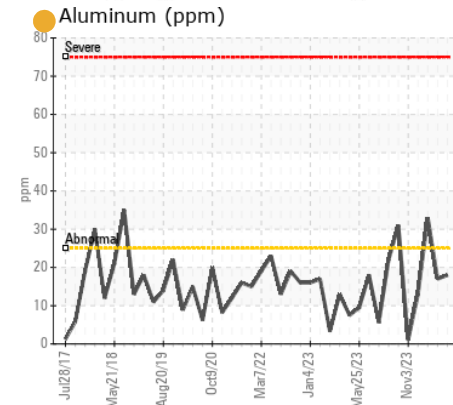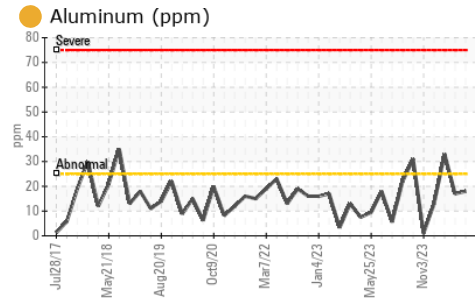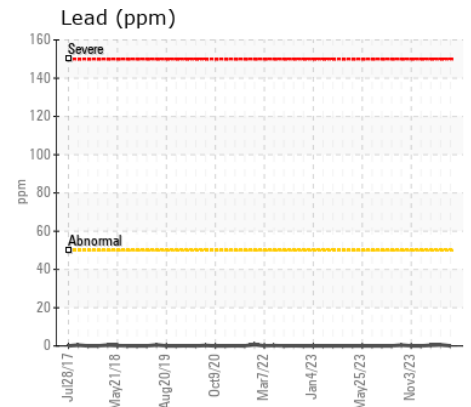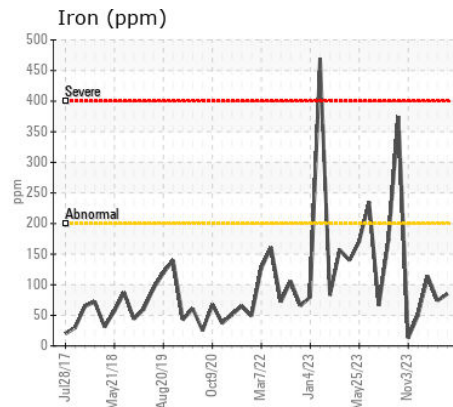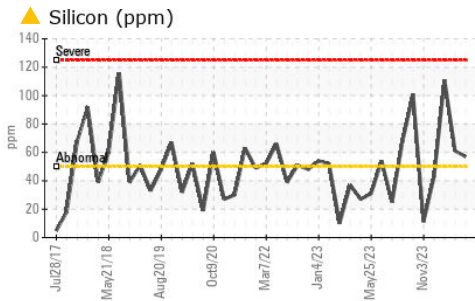

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0921841 **Received** : 11 Jul 2024
Lab Number : 06234106 **Tested** : 12 Jul 2024
Unique Number : 11122940 **Diagnosed** : 14 Jul 2024 - Don Baldridge
Test Package : MOB 1

WAKE STONE CORPORATION-MONCURE
P.O. BOX 158
MONCURE, NC
US 27559
Contact: ROBBIE BOGAN
robbiebogan@wakestonecorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (919)776-1341