



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
H/R JAW CRUSHER 5011 TANK
 Component
Gearbox
 Fluid
SHELL OMALA 220 (45 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0921843	WC0921831	WC0891251
Sample Date		Client Info		26 Jun 2024	25 Apr 2024	31 Jan 2024
Machine Age	hrs	Client Info		20838	20533	203
Oil Age	hrs	Client Info		324	506	719
Filter Age	hrs	Client Info		324	506	719
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	81	63	99
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		2	2	2
Silver	ppm	ASTM D5185m		<1	<1	0
Aluminum	ppm	ASTM D5185m	>25	16	14	29
Lead	ppm	ASTM D5185m	>50	<1	1	<1
Copper	ppm	ASTM D5185m	>200	1	3	0
Tin	ppm	ASTM D5185m	>10	<1	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	49	48	100
Potassium	ppm	ASTM D5185m	>20	5	4	8
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	12	9
Boron	ppm	ASTM D5185m	4.4	2	2	6
Barium	ppm	ASTM D5185m	0.0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	2	0
Manganese	ppm	ASTM D5185m		<1	1	2
Magnesium	ppm	ASTM D5185m	0	4	13	6
Calcium	ppm	ASTM D5185m	0	2	25	17
Phosphorus	ppm	ASTM D5185m	215	338	332	314
Zinc	ppm	ASTM D5185m	0	3	10	0
Sulfur	ppm	ASTM D5185m	7039	10976	12729	10751
Visc @ 40°C	cSt	ASTM D445	220	205	206	190

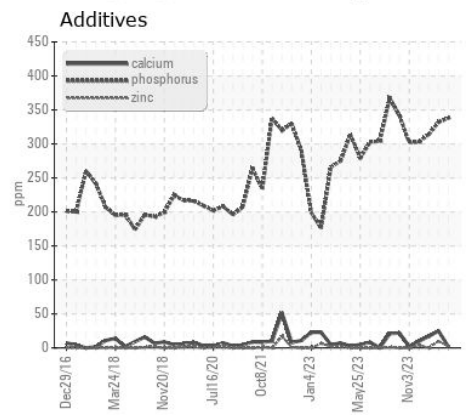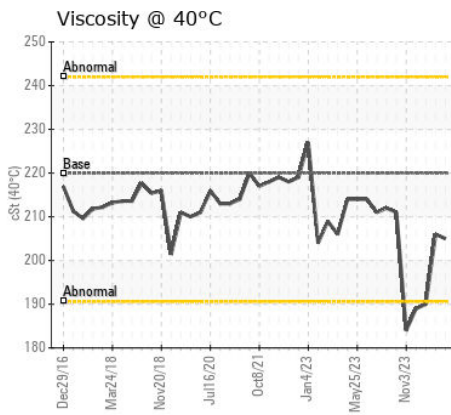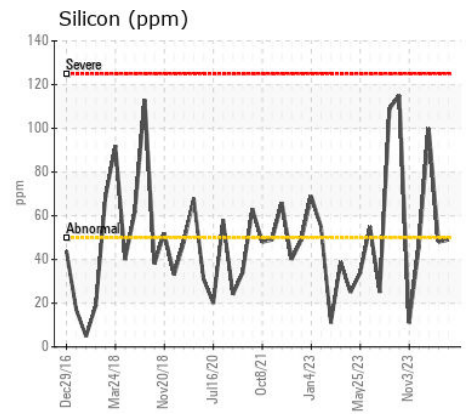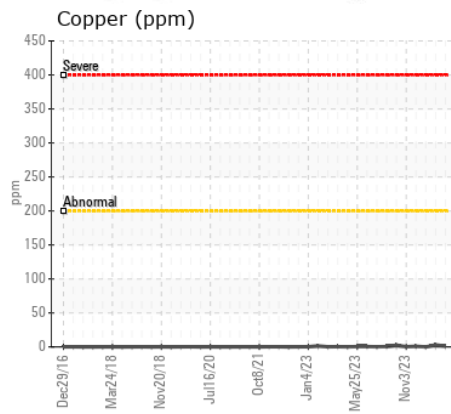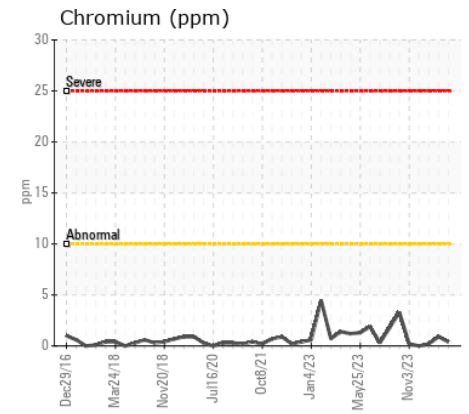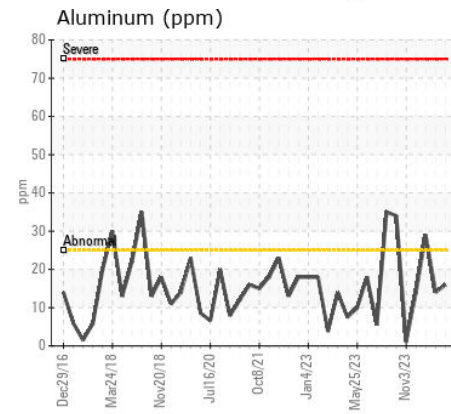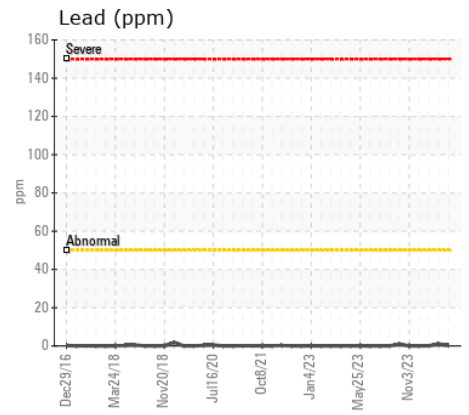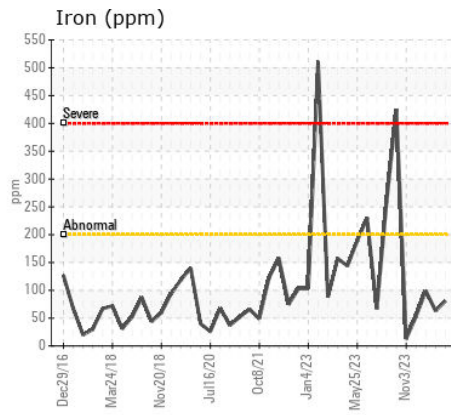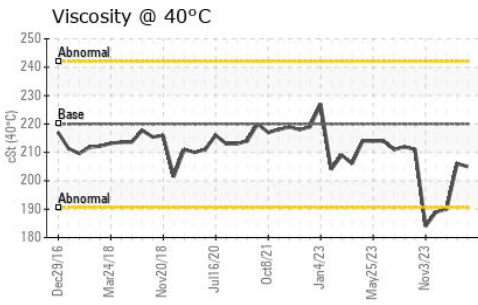

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0921843
Lab Number : 06234110
Unique Number : 11122944
Test Package : MOB 1

WAKE STONE CORPORATION-MONCURE
P.O. BOX 158
MONCURE, NC
US 27559
Contact: ROBBIE BOGAN
robbiebogan@wakestonecorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (919)776-1341