



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[20242919]

Machine Id

Cummins 20301 Century Gen 2

Component

Natural Gas Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0037080	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	yrs	Client Info		0	---	---
Oil Age	yrs	Client Info		1	---	---
Filter Age	yrs	Client Info		1	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<1	---	---
Chromium	ppm	ASTM D5185m	>4	0	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>9	<1	---	---
Lead	ppm	ASTM D5185m	>30	2	---	---
Copper	ppm	ASTM D5185m	>35	28	---	---
Tin	ppm	ASTM D5185m	>4	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	2	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	---	---
Boron	ppm	ASTM D5185m	250	19	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	15	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	450	216	---	---
Calcium	ppm	ASTM D5185m	3000	1732	---	---
Phosphorus	ppm	ASTM D5185m	1150	827	---	---
Zinc	ppm	ASTM D5185m	1350	1000	---	---
Sulfur	ppm	ASTM D5185m	4250	3684	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.0	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	---	---

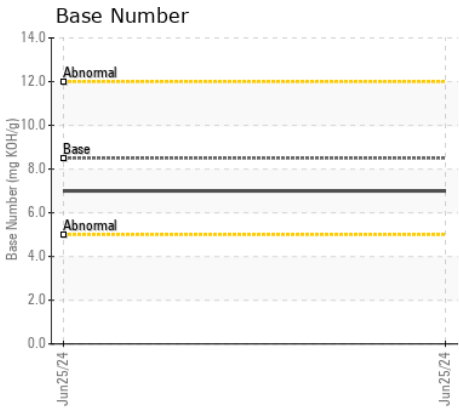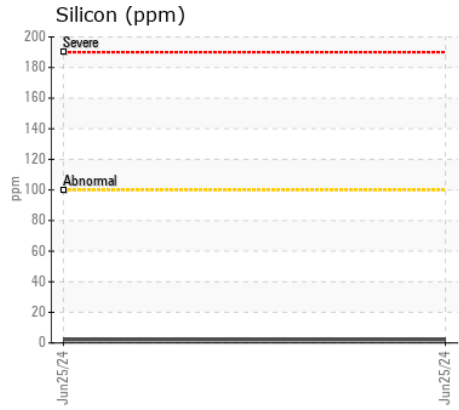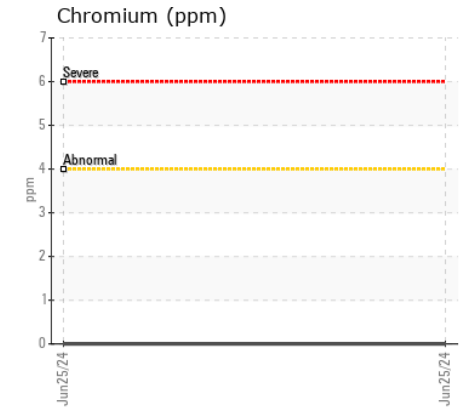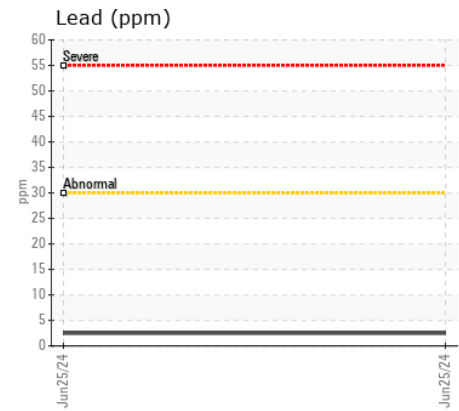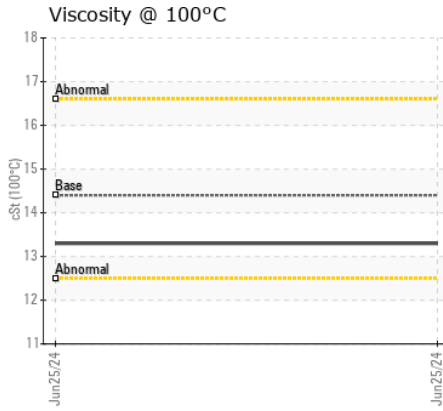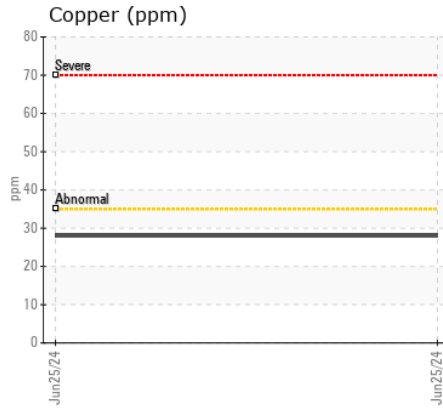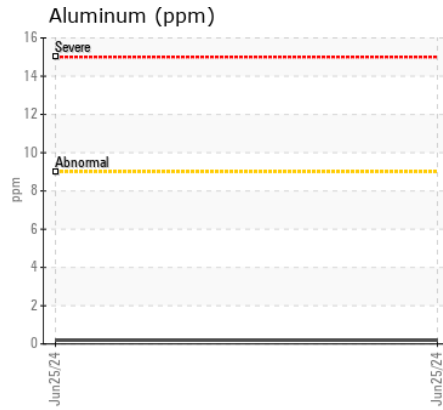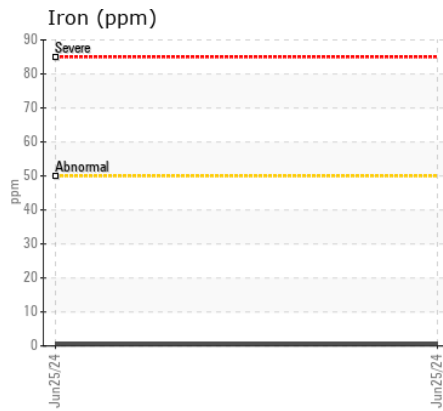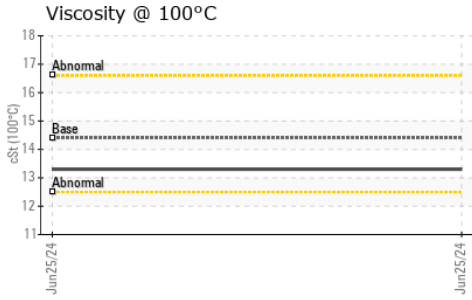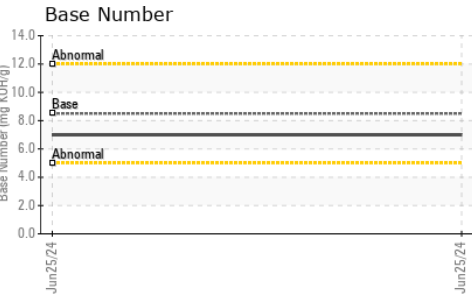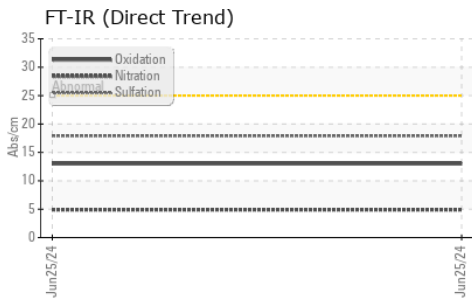

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : DC0037080 Received : 11 Jul 2024
 Lab Number : 06234171 Tested : 12 Jul 2024
 Unique Number : 11123005 Diagnosed : 12 Jul 2024 - Wes Davis
 Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JE RICHARDS
 4600 HARGROVE DR
 LANHAM, MD
 US 20706
 Contact: E. NOEL
 enoel@phalconusa.com
 T: (240)623-4398
 F: