



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**PETERBILT 453678**  
Component  
**Diesel Engine**  
Fluid  
**CITGO CITGUARD 600 15W40 (22 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0012809</b>	RPL0004516	---
Sample Date		Client Info		<b>14 Jun 2024</b>	22 Mar 2023	---
Machine Age	hrs	Client Info		<b>3906</b>	3018	---
Oil Age	hrs	Client Info		<b>88</b>	959	---
Filter Age	hrs	Client Info		<b>88</b>	959	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>13</b>	30	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	13	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>15</b>	28	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	28	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	▲ 4.4	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.9</b>	11.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	24.2	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	---
Boron	ppm	ASTM D5185m	13	<b>4</b>	5	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m	57	<b>60</b>	58	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	825	<b>400</b>	425	---
Calcium	ppm	ASTM D5185m	1100	<b>1873</b>	1528	---
Phosphorus	ppm	ASTM D5185m	933	<b>1050</b>	833	---
Zinc	ppm	ASTM D5185m	1089	<b>1222</b>	1061	---
Sulfur	ppm	ASTM D5185m	2769	<b>3814</b>	2648	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.9</b>	21.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	<b>8.7</b>	6.3	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.7</b>	▲ 11.3	---

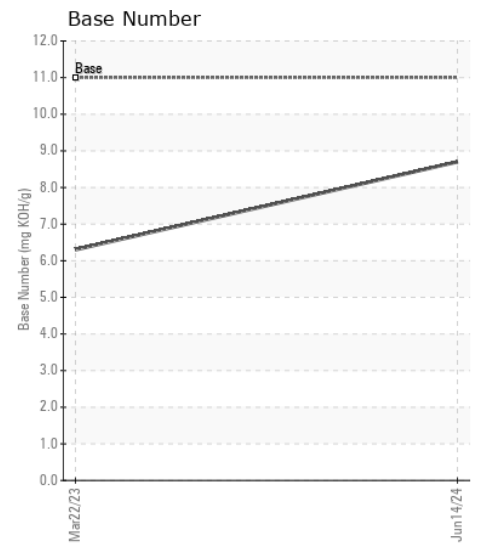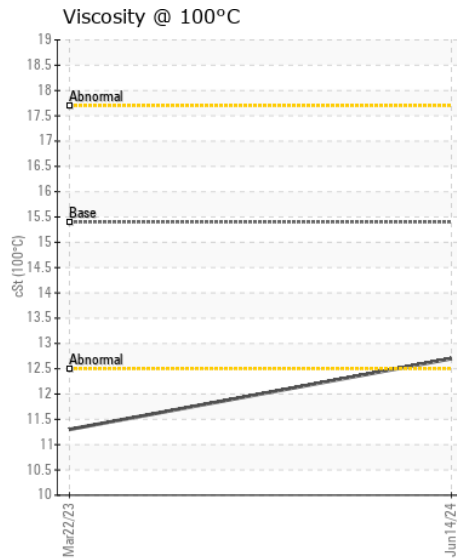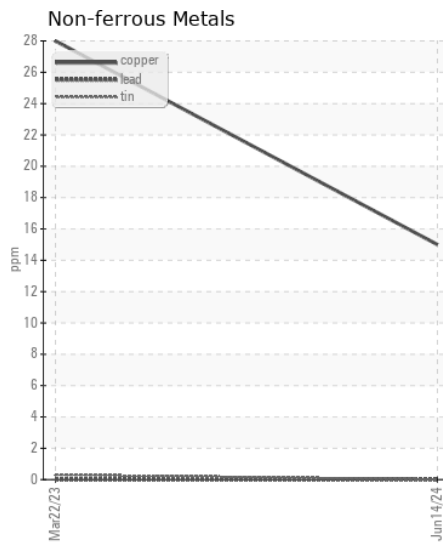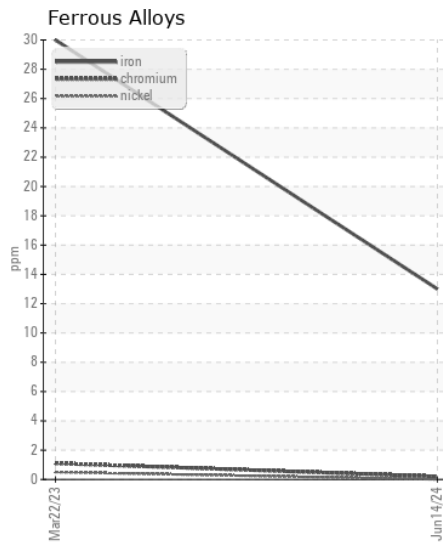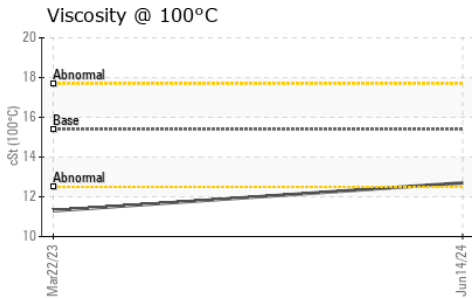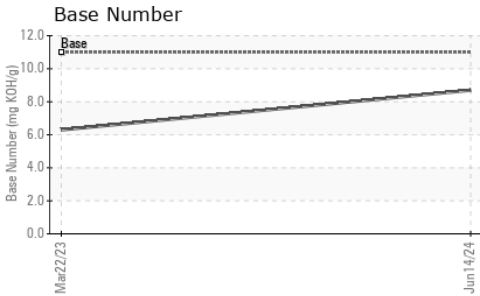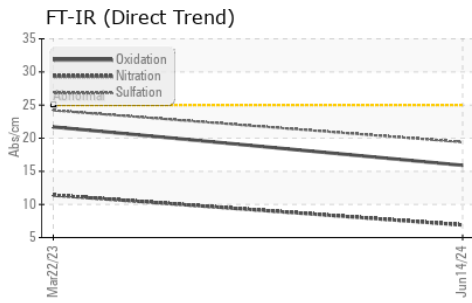

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RPL0012809

**Lab Number** : 06234256

**Unique Number** : 11123090

**Test Package** : FLEET

**Received** : 11 Jul 2024

**Tested** : 12 Jul 2024

**Diagnosed** : 12 Jul 2024 - Wes Davis

**RTL PACLEASE - 7010 - Florida**

9407 Bachman Road

Orlando, FL

US 32824

Contact: John Churchwell

ChurchwellJ@rushenterprises.com

T: (407)240-7511

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)