



McCLUNG-LOGAN
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	ATTENTION



Area
[W2008508]
Machine Id
VOLVO A30G 740282
Component
Diesel Engine
Fluid
{not provided} (11 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W02008508)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002417	---	---
Sample Date		Client Info		09 Jul 2024	---	---
Machine Age	hrs	Client Info		10539	---	---
Oil Age	hrs	Client Info		10539	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	<1	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









Light fuel dilution occurring.

Silicon	ppm	ASTM D5185m	>25	4	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel	%	ASTM D3524	>6.0	▲ 3.8	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		44	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		37	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		435	---	---
Calcium	ppm	ASTM D5185m		1818	---	---
Phosphorus	ppm	ASTM D5185m		944	---	---
Zinc	ppm	ASTM D5185m		1041	---	---
Sulfur	ppm	ASTM D5185m		3303	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.8	---	---
Visc @ 100°C	cSt	ASTM D445		● 12.2	---	---

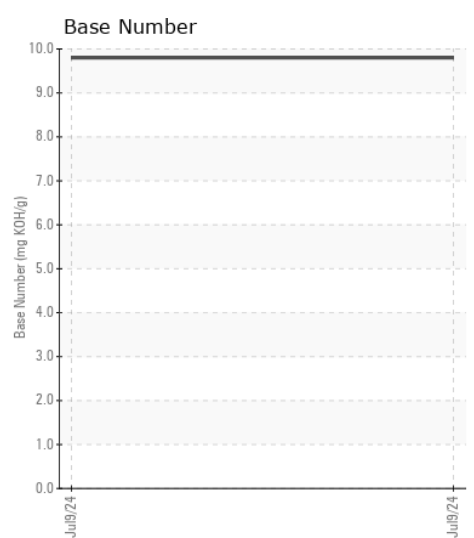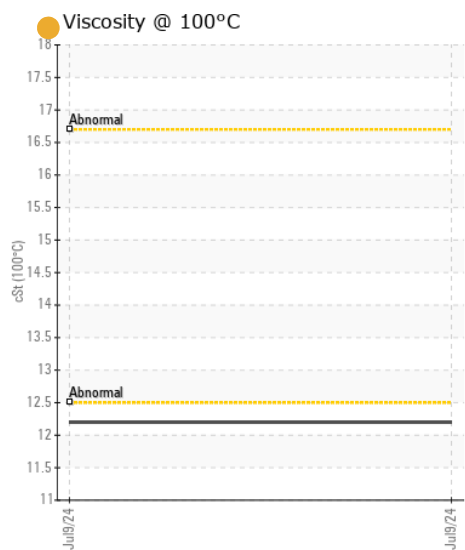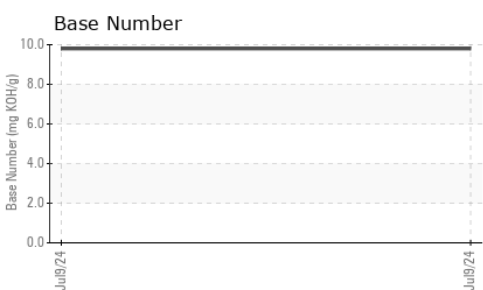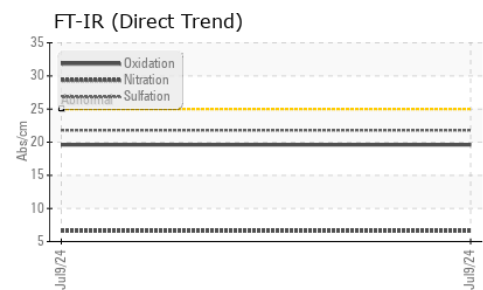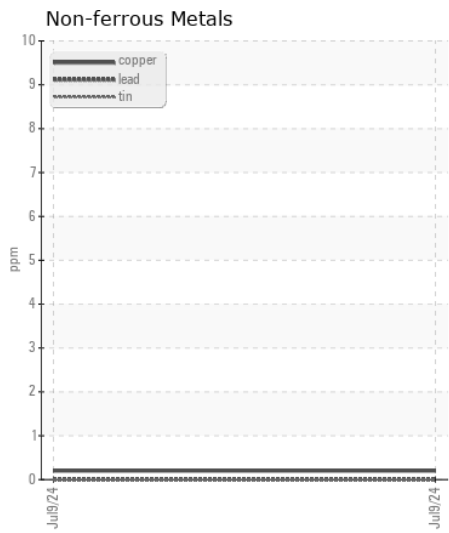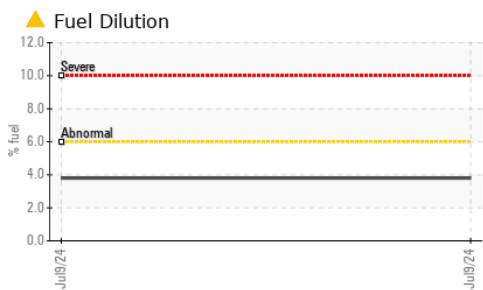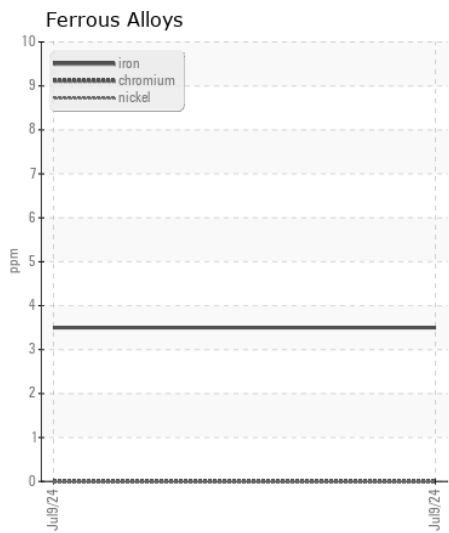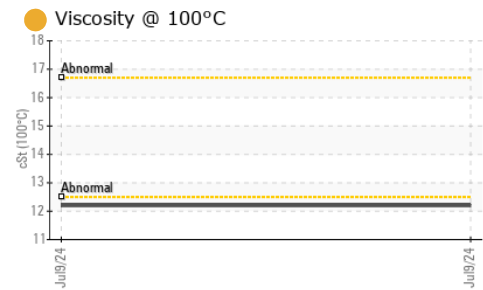

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002417
Lab Number : 06234260
Unique Number : 11123094
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

Received : 11 Jul 2024
Tested : 16 Jul 2024
Diagnosed : 16 Jul 2024 - Jonathan Hester

S. W. RODGERS
 PO BOX 398, 5816 Wellington Rd, Gainesville, VA
 GAINESVILLE, VA
 US 20156
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (703)754-8100

F: