



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[W2008506]

Machine Id

VOLVO L70F 26744

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 40 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W02008506)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002403	---	---
Sample Date		Client Info		09 Jul 2024	---	---
Machine Age	hrs	Client Info		14603	---	---
Oil Age	hrs	Client Info		14603	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>15	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	4	---	---
Boron	ppm	ASTM D5185m	250	42	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	38	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	475	---	---
Calcium	ppm	ASTM D5185m	3000	1963	---	---
Phosphorus	ppm	ASTM D5185m	1150	977	---	---
Zinc	ppm	ASTM D5185m	1350	1120	---	---
Sulfur	ppm	ASTM D5185m	4250	3328	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.7	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	---	---

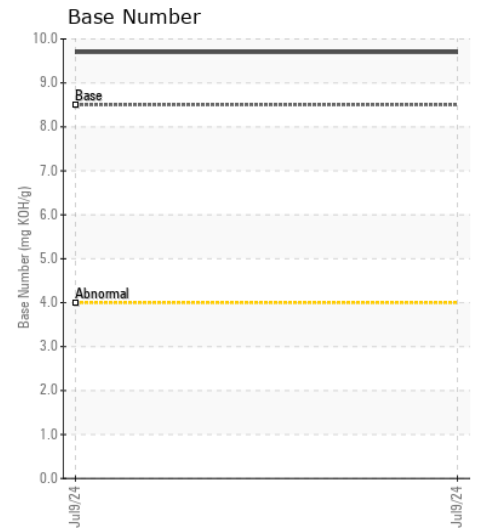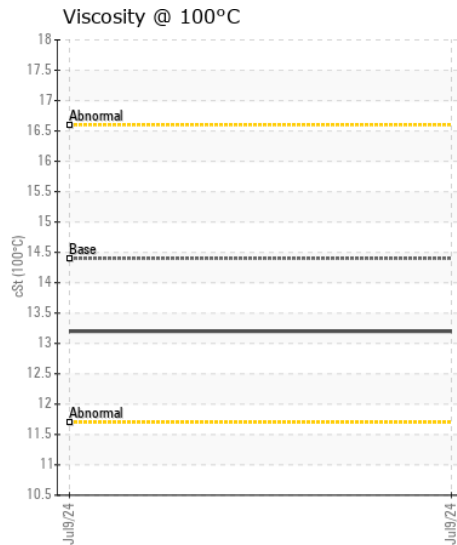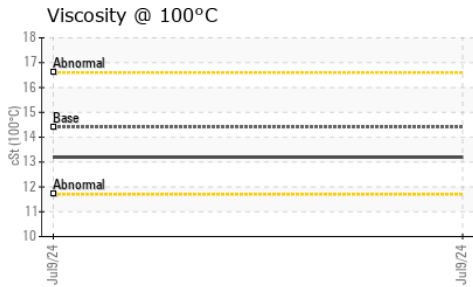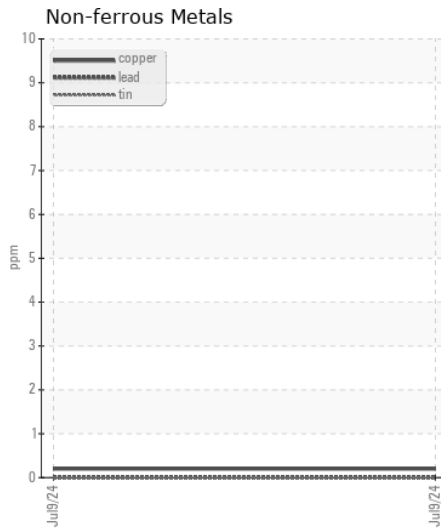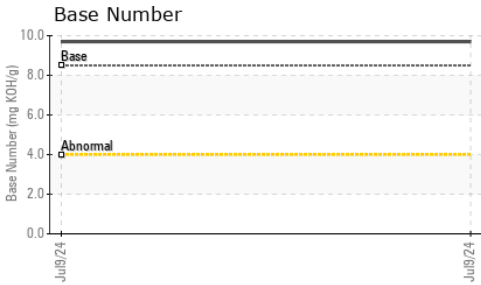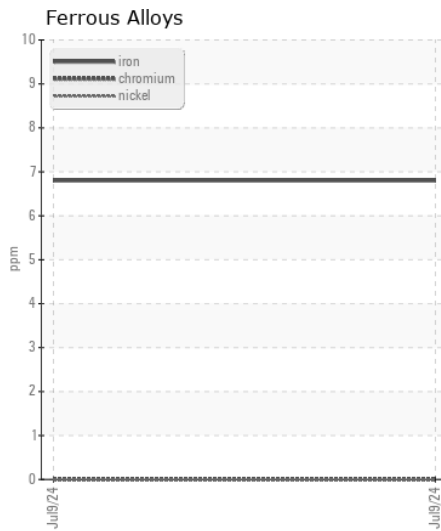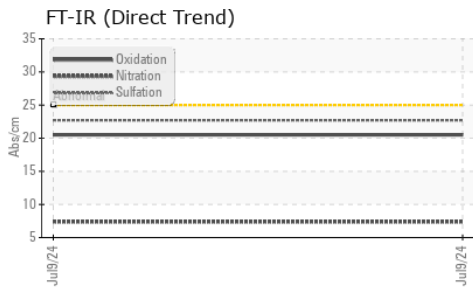

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002403 **Received** : 11 Jul 2024
Lab Number : 06234263 **Tested** : 12 Jul 2024
Unique Number : 11123097 **Diagnosed** : 14 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: TBN)

MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110
 Contact: MIKE MAYHUGH
 MMAYHUGH@MCCLUNG-LOGAN.COM
 T: (703)393-7344
 F: (703)393-7844

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)