



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
424104 KENWORTH T800
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0115233	GFL0115206	---
Sample Date		Client Info		08 Jul 2024	10 Jun 2024	---
Machine Age	hrs	Client Info		22179	22100	---
Oil Age	hrs	Client Info		88	78	---
Filter Age	hrs	Client Info		88	78	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	10	23	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		28	94	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	1	2	---
Lead	ppm	ASTM D5185m	>40	0	2	---
Copper	ppm	ASTM D5185m	>330	0	<1	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	6	---
Potassium	ppm	ASTM D5185m	>20	2	8	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.4	1.2	---
Nitration	Abs/cm	*ASTM D7624	>20	6.4	9.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.1	23.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	6	---
Boron	ppm	ASTM D5185m	0	41	120	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	39	3	---
Manganese	ppm	ASTM D5185m	0	0	1	---
Magnesium	ppm	ASTM D5185m	1010	765	448	---
Calcium	ppm	ASTM D5185m	1070	1509	1914	---
Phosphorus	ppm	ASTM D5185m	1150	1096	987	---
Zinc	ppm	ASTM D5185m	1270	1294	1235	---
Sulfur	ppm	ASTM D5185m	2060	4217	4141	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	17.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.3	7.7	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	14.8	---


FT-IR (Direct Trend)

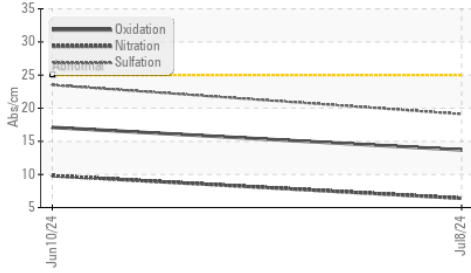


Base Number

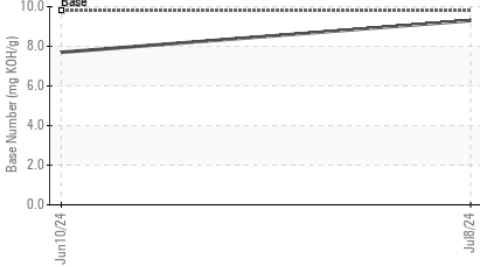


Viscosity @ 100°C

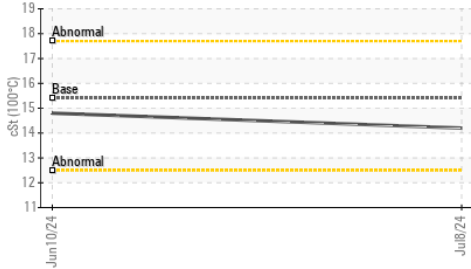


Ferrous Alloys

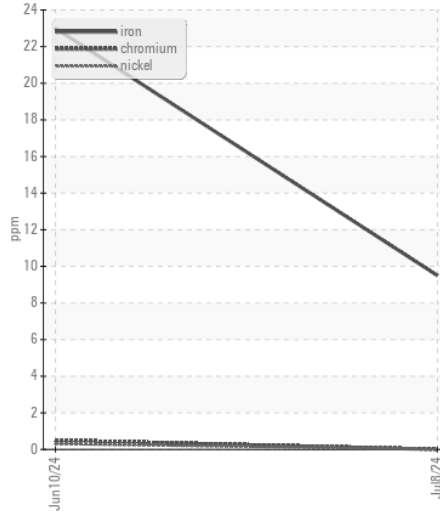


Non-ferrous Metals

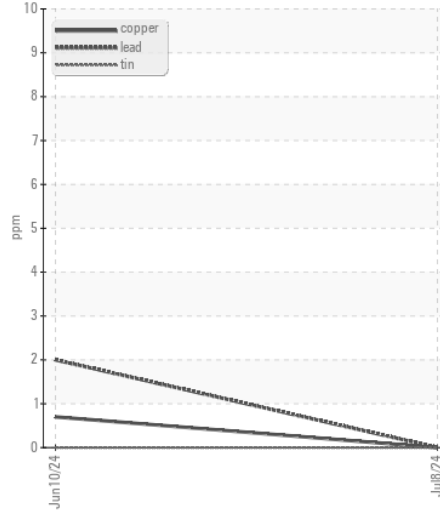

Viscosity @ 100°C

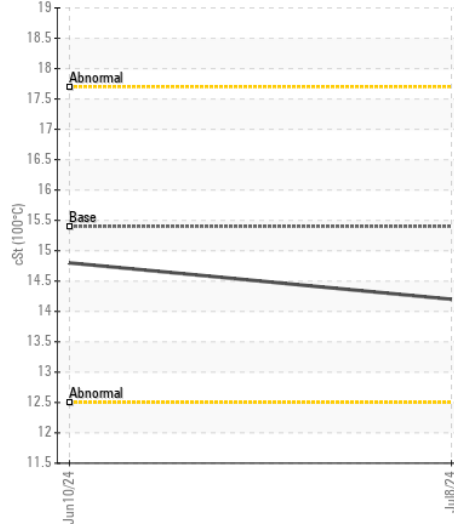

Base Number

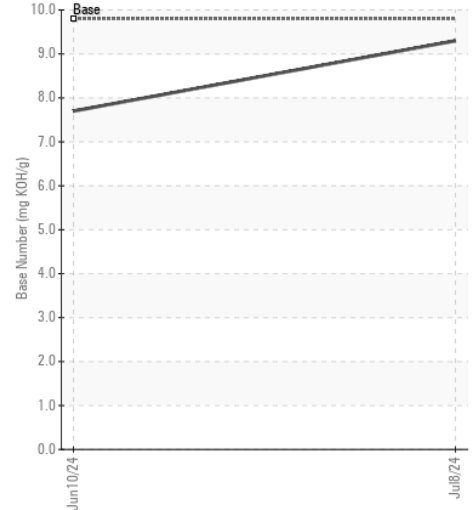

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0115233
 Lab Number : 06234291
 Unique Number : 11123125
 Test Package : FLEET

Received : 11 Jul 2024
 Tested : 12 Jul 2024
 Diagnosed : 14 Jul 2024 - Don Baldrige

GFL Environmental - 642B- MCM Disposal
 10450 Pease Ave
 Byron Center, MI
 US 49315
 Contact: Chad Arp
 carp@gflenv.com
 T: (616)915-7901
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)