



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2-257
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0895219	WC0871773	WC0834207
Sample Date		Client Info		12 Jun 2024	20 Mar 2024	10 Dec 2023
Machine Age	hrs	Client Info		18045	17271	16509
Oil Age	hrs	Client Info		774	762	744
Filter Age	hrs	Client Info		774	762	744
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	10	13	11
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	4	4
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	4	4	3
Tin	ppm	ASTM D5185m	>15	0	1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	15	9	5
Potassium	ppm	ASTM D5185m	>20	18	14	5
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.8	10.0	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.0	22.1	19.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	3	0	2
Boron	ppm	ASTM D5185m	250	20	40	74
Barium	ppm	ASTM D5185m	10	0	<1	0
Molybdenum	ppm	ASTM D5185m	100	50	27	8
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	379	726	736
Calcium	ppm	ASTM D5185m	3000	2125	1376	1336
Phosphorus	ppm	ASTM D5185m	1150	864	749	725
Zinc	ppm	ASTM D5185m	1350	974	847	835
Sulfur	ppm	ASTM D5185m	4250	3664	2978	3022
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.1	19.2	14.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.3	5.2	7.1
Visc @ 100°C	cSt	ASTM D445	14.4	14.1	13.7	13.8

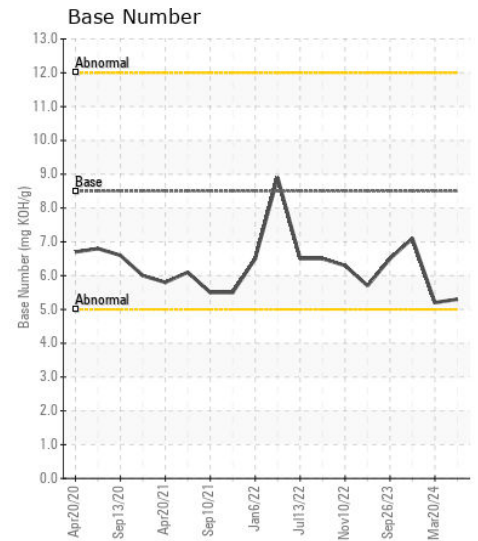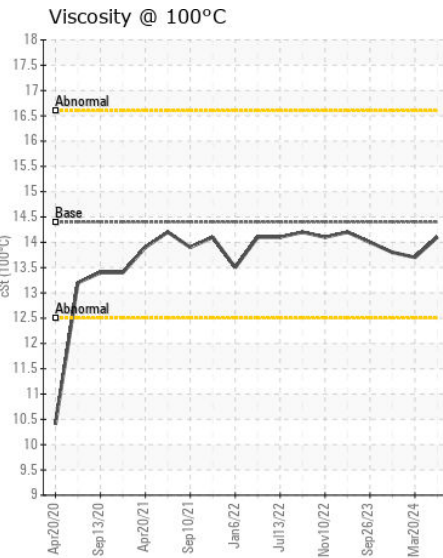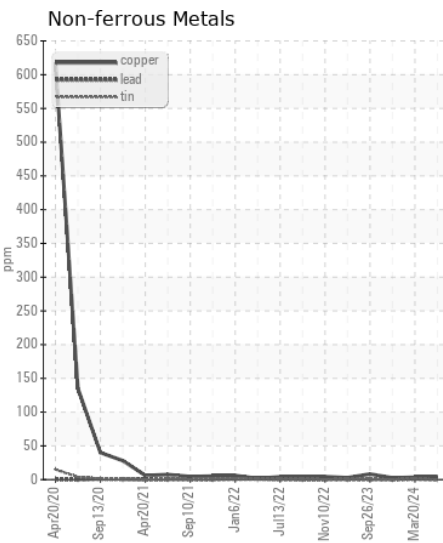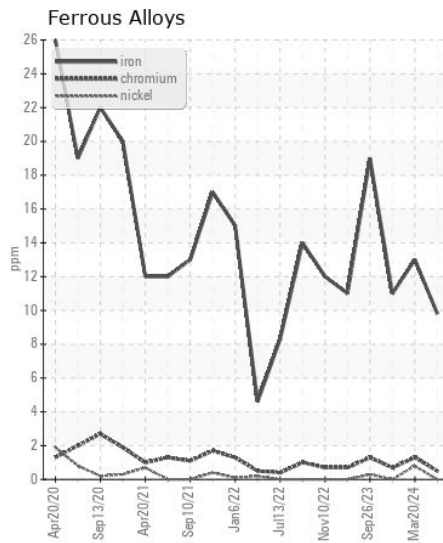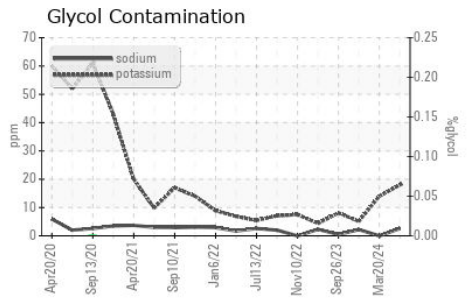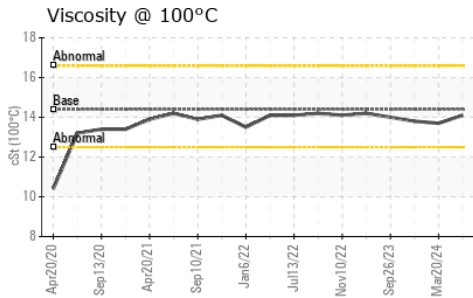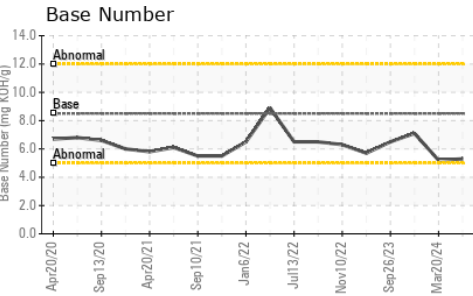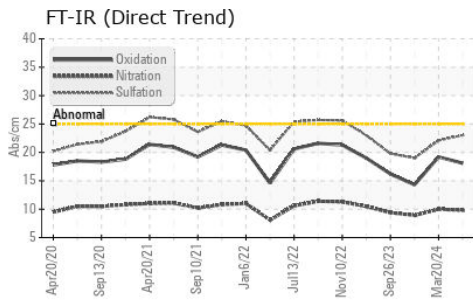

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0895219 **Received** : 11 Jul 2024
Lab Number : **06234316** **Tested** : 14 Jul 2024
Unique Number : 11123150 **Diagnosed** : 14 Jul 2024 - Don Baldridge
Test Package : FLEET (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ALASKA WEST EXPRESS
 1095 SANDURI STREET
 FAIRBANKS, AK
 US 99701

Contact: TOM DOUTHIT
 tdouthit@lynden.com

T: (907)452-4355

F: (907)328-1956