



# WEAR CHECK

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**CATERPILLAR LD MANNS**  
Component  
**Port Main Engine**  
Fluid  
**KENDALL D3 40WT (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0843954	---	---
Sample Date		Client Info		05 Jul 2024	---	---
Machine Age	hrs	Client Info		53387	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		1000	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	12	---	---
Chromium	ppm	ASTM D5185m	>8	<1	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m	>3	2	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>15	1	---	---
Lead	ppm	ASTM D5185m	>18	14	---	---
Copper	ppm	ASTM D5185m	>80	12	---	---
Tin	ppm	ASTM D5185m	>14	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	12.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	3	---	---
Boron	ppm	ASTM D5185m		23	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		21	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		33	---	---
Calcium	ppm	ASTM D5185m		2515	---	---
Phosphorus	ppm	ASTM D5185m		444	---	---
Zinc	ppm	ASTM D5185m		532	---	---
Sulfur	ppm	ASTM D5185m		3839	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.8	---	---
Visc @ 100°C	cSt	ASTM D445		14.8	---	---

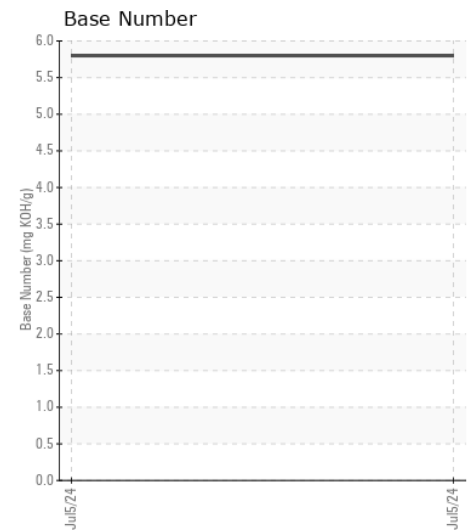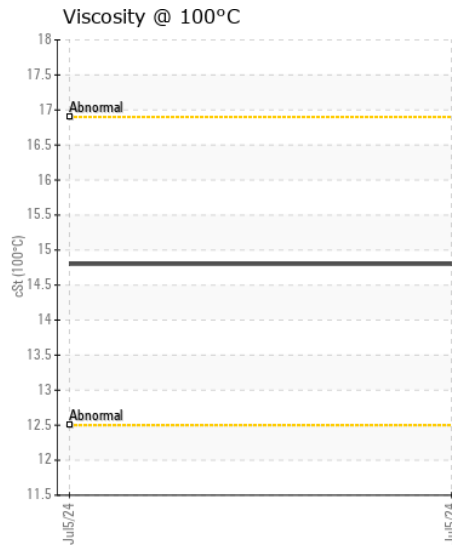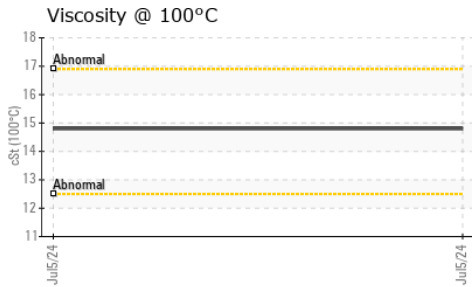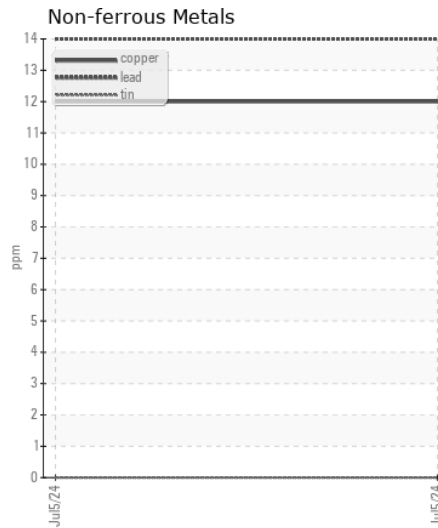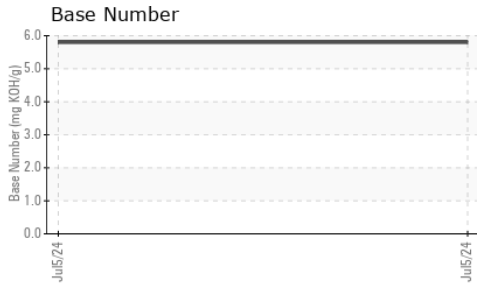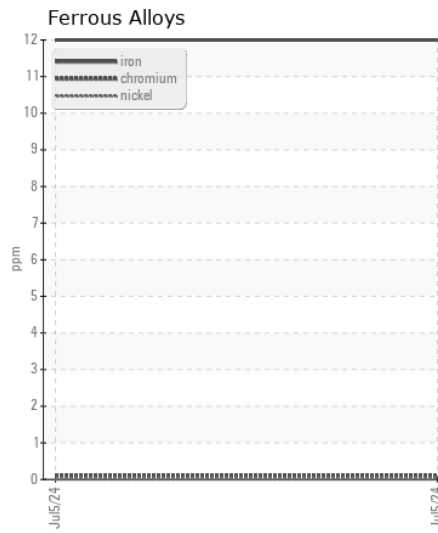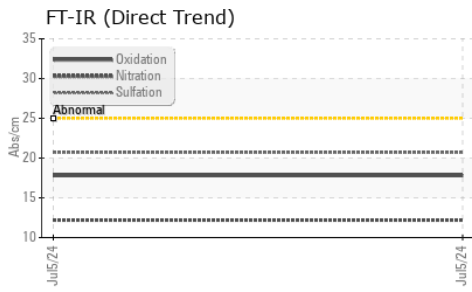

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0843954  
**Lab Number** : 06234361  
**Unique Number** : 11123195  
**Test Package** : FLEET

**Received** : 11 Jul 2024  
**Tested** : 12 Jul 2024  
**Diagnosed** : 12 Jul 2024 - Wes Davis

**SUPERIOR MARINE**  
 201 KELLY LANE  
 CHESAPEAKE, OH  
 US 45619

Contact: DARRELL KEARNS  
 darrellkearns@superiormarineinc.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: