



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
CUMMINS LD MANNS
Component
Port Genset
Fluid
KENDALL D3 40WT (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HRE0000267	---	---
Sample Date		Client Info		05 Jul 2024	---	---
Machine Age	hrs	Client Info		11852	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		1000	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	53	---	---
Chromium	ppm	ASTM D5185m	>4	1	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m		5	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>12	4	---	---
Lead	ppm	ASTM D5185m	>17	6	---	---
Copper	ppm	ASTM D5185m	>70	14	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	16.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		18	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		17	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		91	---	---
Calcium	ppm	ASTM D5185m		3537	---	---
Phosphorus	ppm	ASTM D5185m		821	---	---
Zinc	ppm	ASTM D5185m		1032	---	---
Sulfur	ppm	ASTM D5185m		3846	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	31.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.8	---	---
Visc @ 100°C	cSt	ASTM D445		17.5	---	---

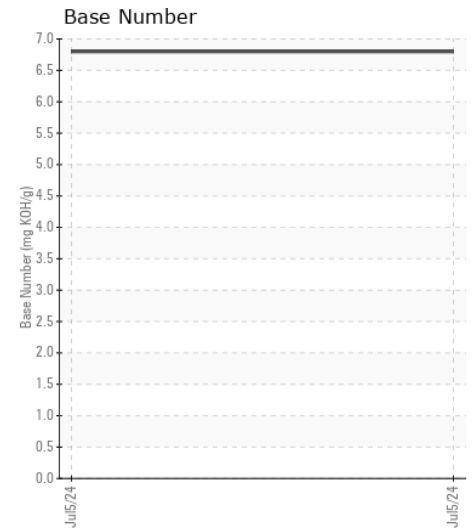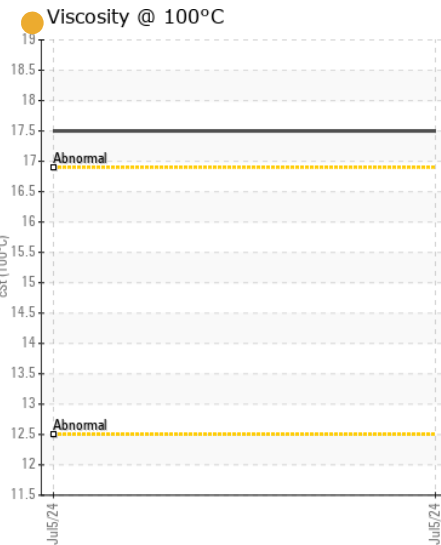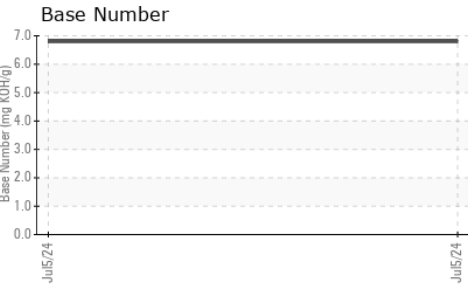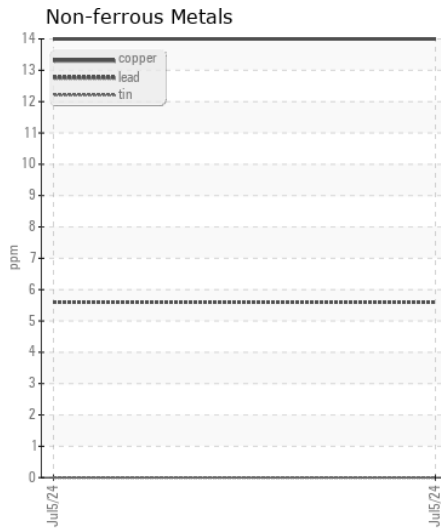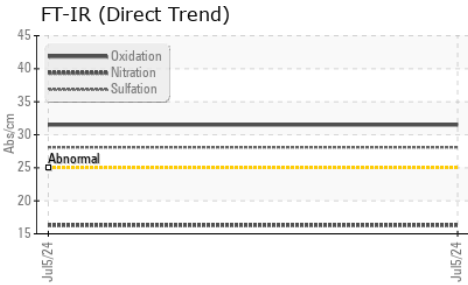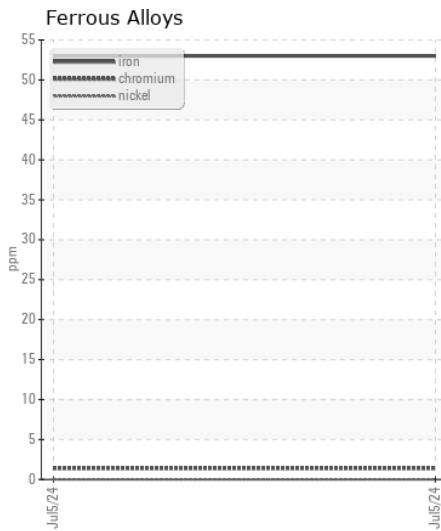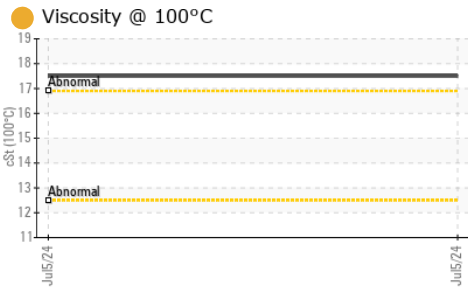

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : HRE0000267

Lab Number : 06234362

Unique Number : 11123196

Test Package : FLEET

Received : 11 Jul 2024

Tested : 12 Jul 2024

Diagnosed : 14 Jul 2024 - Don Baldrige

SUPERIOR MARINE

201 KELLY LANE

CHESAPEAKE, OH

US 45619

Contact: DARRELL KEARNS

darrellkearns@superiormarineinc.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)