



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**CATERPILLAR STEPHEN T**  
Component  
**Port Main Engine**  
Fluid  
**KENDALL SUPER-D XA 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>HRE0000290</b>	WC0843960	WC0843995
Sample Date		Client Info		<b>24 Jun 2024</b>	23 Feb 2024	22 Sep 2023
Machine Age	hrs	Client Info		<b>23714</b>	20952	18312
Oil Age	hrs	Client Info		<b>500</b>	500	500
Filter Age	hrs	Client Info		<b>500</b>	500	500
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>24</b>	18	6
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>45</b>	57	34
Silver	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	3	<1
Lead	ppm	ASTM D5185m	>40	<b>2</b>	6	<1
Copper	ppm	ASTM D5185m	>300	<b>71</b>	▲ 296	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>4</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	8	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.5</b>	0.4	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	9.2	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	21.0	18.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	13	2
Boron	ppm	ASTM D5185m	50	<b>25</b>	44	107
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>17</b>	21	55
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	270	<b>317</b>	320	211
Calcium	ppm	ASTM D5185m	1900	<b>2190</b>	2052	2113
Phosphorus	ppm	ASTM D5185m	1000	<b>916</b>	966	1092
Zinc	ppm	ASTM D5185m	1260	<b>1118</b>	1216	1383
Sulfur	ppm	ASTM D5185m	3400	<b>3998</b>	4096	4325
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.3</b>	16.4	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	<b>6.1</b>	6.6	7.4
Visc @ 100°C	cSt	ASTM D445	15.3	<b>13.8</b>	13.6	13.6


**FT-IR (Direct Trend)**

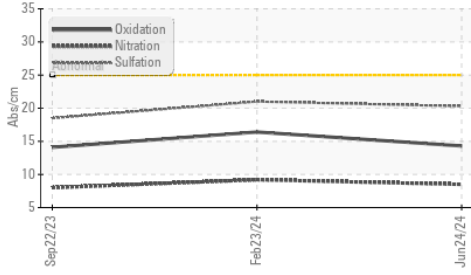


**Ferrous Alloys**

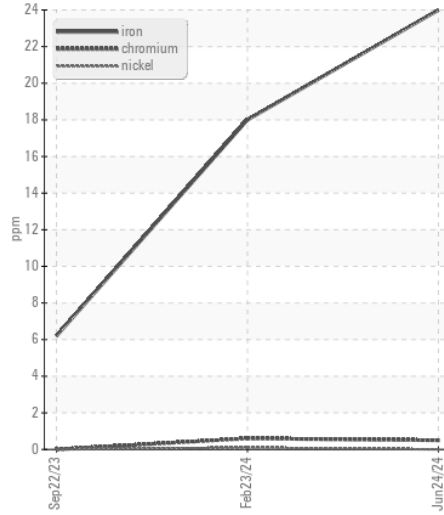


**Base Number**

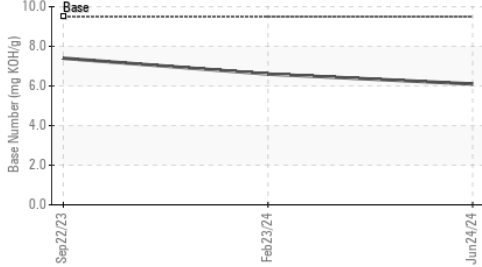


**Viscosity @ 100°C**

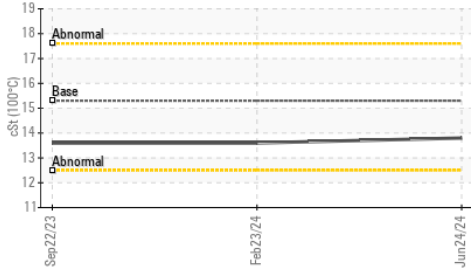


**Non-ferrous Metals**

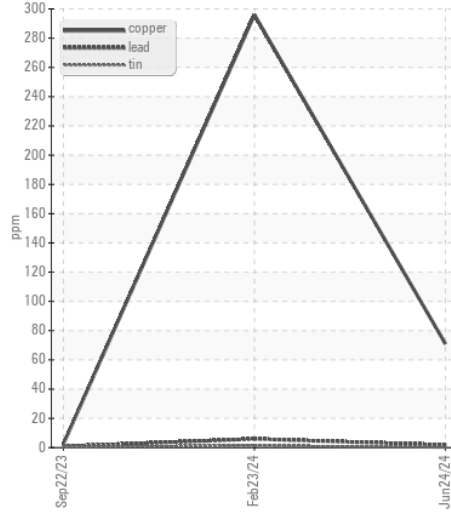

**Viscosity @ 100°C**

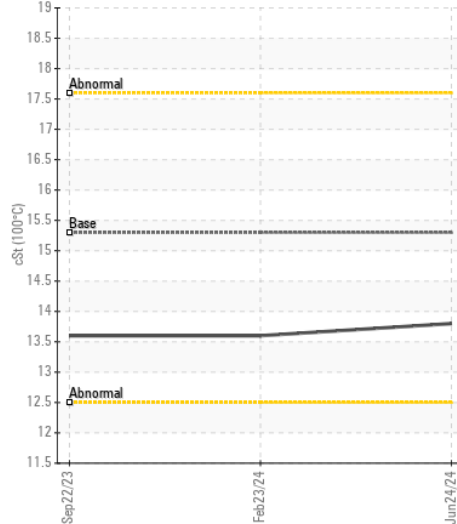

**Base Number**

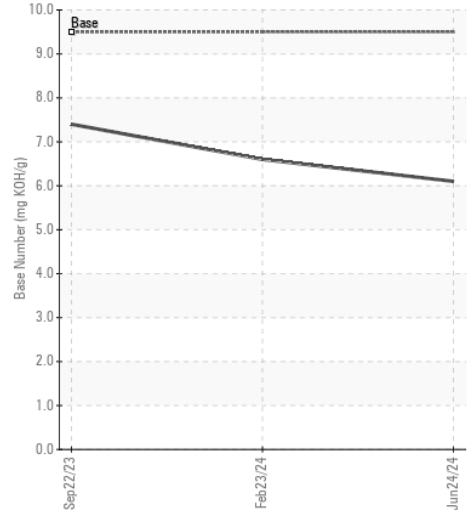

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : HRE0000290

**Lab Number** : 06234364

**Unique Number** : 11123198

**Test Package** : FLEET

**Received** : 11 Jul 2024

**Tested** : 12 Jul 2024

**Diagnosed** : 12 Jul 2024 - Wes Davis

**SUPERIOR MARINE**

201 KELLY LANE

CHESAPEAKE, OH

US 45619

Contact: DARRELL KEARNS

darrellkearns@superiormarineinc.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)