



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
TENNESSEE MERCHANT (S/N 29700815)
Component
Starboard Main Engine
Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (209 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0044725 | MW0044713 | MW0044877 |
| Sample Date | | Client Info | | 05 Jul 2024 | 01 Jun 2024 | 14 May 2024 |
| Machine Age | hrs | Client Info | | 7843 | 7137 | 6739 |
| Oil Age | hrs | Client Info | | 814 | 132 | 797 |
| Filter Age | hrs | Client Info | | 814 | 132 | 797 |
| Oil Changed | | Client Info | | Not Chngd | Changed | N/A |
| Filter Changed | | Client Info | | Not Chngd | Changed | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >75 | 3 | 3 | 4 |
| Chromium | ppm | ASTM D5185m | >8 | 0 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 8 | 11 | 13 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >15 | 2 | 3 | 2 |
| Lead | ppm | ASTM D5185m | >18 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >80 | <1 | <1 | 2 |
| Tin | ppm | ASTM D5185m | >14 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >20 | 4 | 11 | 5 |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 4 | 4 |
| Fuel | | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | | 0.1 | 0.1 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.6 | 6.7 | 9.1 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 18.8 | 18.3 | 19.2 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | >75 | 1 | <1 | 3 |
| Boron | ppm | ASTM D5185m | 151 | 162 | 184 | 106 |
| Barium | ppm | ASTM D5185m | 0.4 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 250 | 38 | 39 | 32 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 0 | 652 | 653 | 690 |
| Calcium | ppm | ASTM D5185m | 2046 | 1448 | 1448 | 1438 |
| Phosphorus | ppm | ASTM D5185m | 1043 | 830 | 825 | 802 |
| Zinc | ppm | ASTM D5185m | 943 | 966 | 899 | 815 |
| Sulfur | ppm | ASTM D5185m | 5012 | 3874 | 3296 | 3397 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 13.9 | 12.8 | 15.0 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 12.5 | 7.9 | 8.5 | 7.6 |
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 13.9 | 14.1 | 13.9 |


FT-IR (Direct Trend)

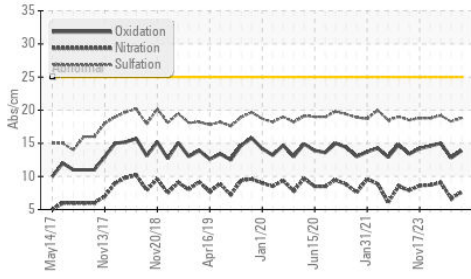


Base Number

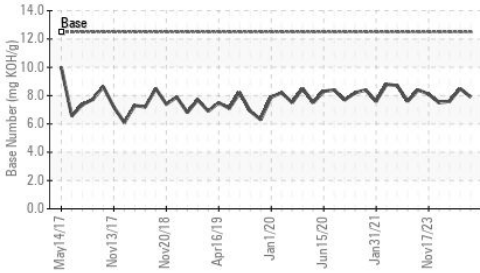


Viscosity @ 100°C

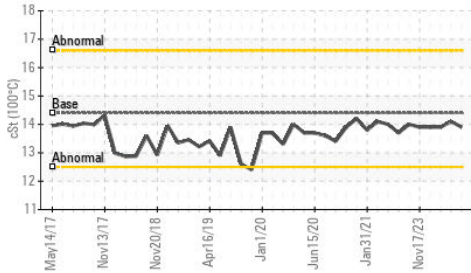


Ferrous Alloys

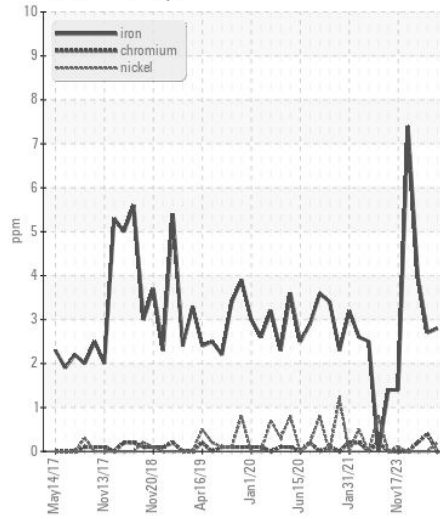


Non-ferrous Metals

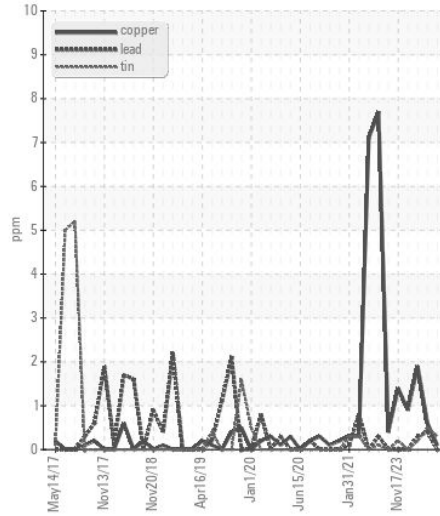

Viscosity @ 100°C

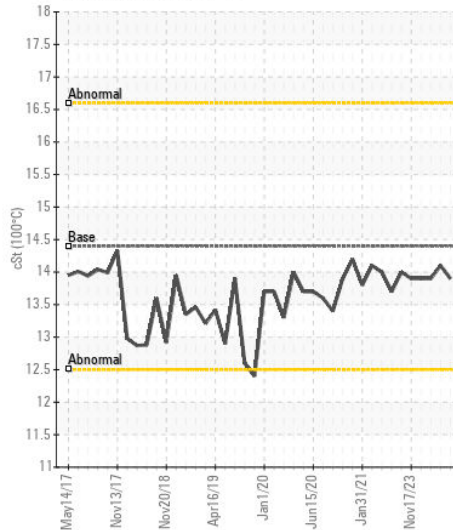

Base Number

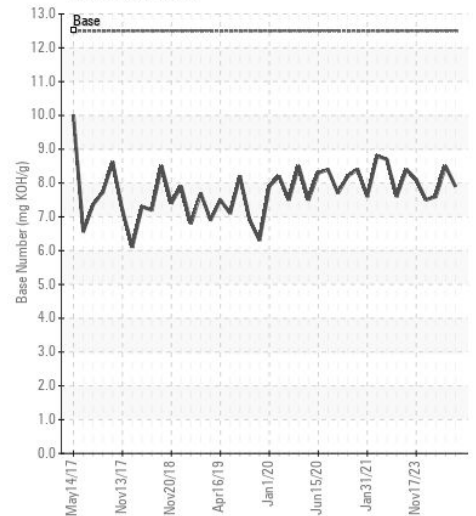

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0044725
Lab Number : 06234433
Unique Number : 11123267
Test Package : MAR 2

Received : 12 Jul 2024
Tested : 12 Jul 2024
Diagnosed : 12 Jul 2024 - Wes Davis

AMERICAN COMMERCIAL LINES
 PO BOX 610, 1701 E. MARKET STREET
 JEFFERSONVILLE, IN
 US 47130
 Contact: RONALD SCHNEIDER
 ronald.schneider@bargaeacbl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (812)288-1644