



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 846-4234
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0021905	RPL0020414	RPL0017922
Sample Date		Client Info		28 Jun 2024	09 May 2024	23 Feb 2024
Machine Age	mls	Client Info		196652	192495	185915
Oil Age	mls	Client Info		0	6580	151998
Filter Age	mls	Client Info		0	6580	0
Oil Changed		Client Info		Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	14	7	6
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	<1	<1	<1
Aluminum	ppm	ASTM D5185m	>25	4	2	4
Lead	ppm	ASTM D5185m	>45	0	0	0
Copper	ppm	ASTM D5185m	>85	1	2	1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	4	3	3
Potassium	ppm	ASTM D5185m	>20	7	3	4
Fuel		WC Method	>5	<1.0	<1.0	▲ 2.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.2	6.7	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2	18.9	19.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	2	<1
Boron	ppm	ASTM D5185m	0	4	2	3
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	59	60	59
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	0	950	942	● 968
Calcium	ppm	ASTM D5185m		1069	1037	● 1039
Phosphorus	ppm	ASTM D5185m		1073	1034	● 1124
Zinc	ppm	ASTM D5185m		1306	1245	● 1343
Sulfur	ppm	ASTM D5185m		3851	3667	3459
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	15.1	15.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	8.5	9.0	8.8
Visc @ 100°C	cSt	ASTM D445	14	12.4	12.6	12.3


FT-IR (Direct Trend)

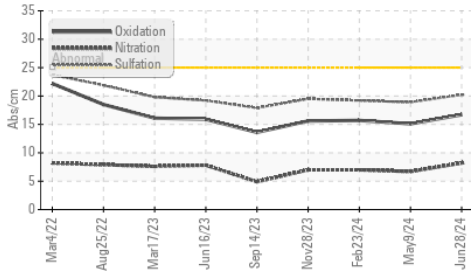


Ferrous Alloys

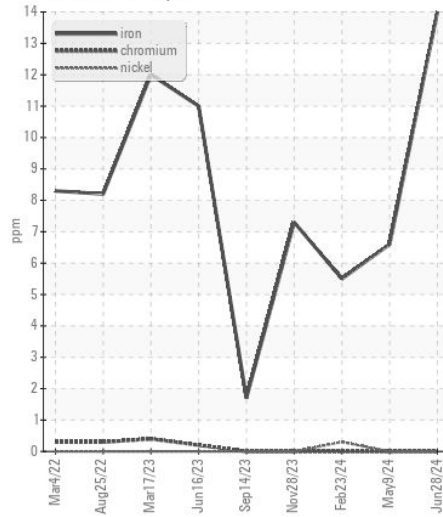


Base Number

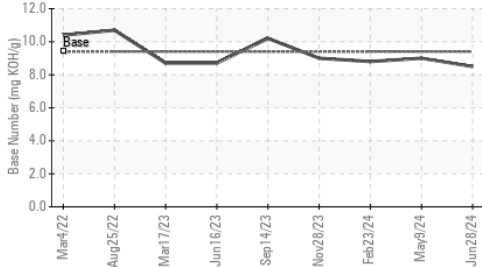


Non-ferrous Metals

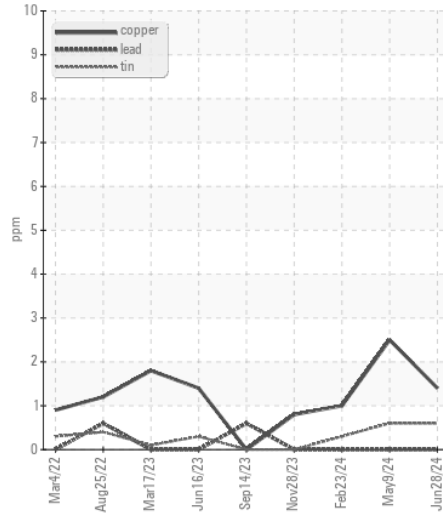


Viscosity @ 100°C

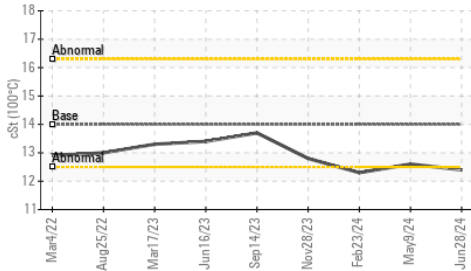

Viscosity @ 100°C

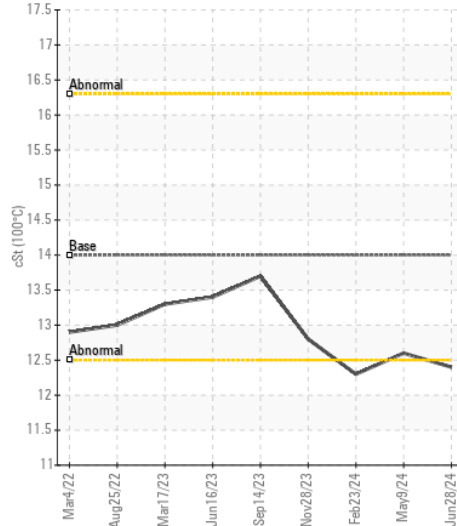

Base Number

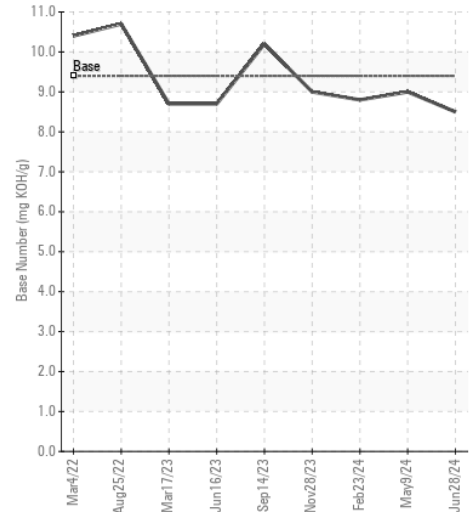

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0021905

Lab Number : 06234478

Unique Number : 11123312

Test Package : FLEET

Received : 12 Jul 2024

Tested : 12 Jul 2024

Diagnosed : 14 Jul 2024 - Don Baldridge

RTL PACLEASE - 7006 - Pico Rivera

7837 Telegraph Rd

Pico Rivera, CA

US 90660

Contact: GERARDO CARROLA

carrolag@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: