



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**846-4944**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0021990</b>	RPL0018125	RPL0016904
Sample Date		Client Info		<b>27 Jun 2024</b>	02 Apr 2024	04 Jan 2024
Machine Age	mls	Client Info		<b>69427</b>	0	52078
Oil Age	mls	Client Info		<b>0</b>	20582	11798
Filter Age	mls	Client Info		<b>0</b>	20582	11798
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>25</b>	19	11
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>15</b>	11	7
Lead	ppm	ASTM D5185m	>40	<b>6</b>	4	2
Copper	ppm	ASTM D5185m	>330	<b>5</b>	4	3
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>9</b>	9	8
Potassium	ppm	ASTM D5185m	>20	<b>36</b>	26	15
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.1</b>	10.0	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.5</b>	21.9	21.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Boron	ppm	ASTM D5185m	0	<b>32</b>	46	60
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	0	<b>79</b>	78	69
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	0	<b>607</b>	671	603
Calcium	ppm	ASTM D5185m		<b>1556</b>	1645	1399
Phosphorus	ppm	ASTM D5185m		<b>767</b>	810	776
Zinc	ppm	ASTM D5185m		<b>937</b>	989	885
Sulfur	ppm	ASTM D5185m		<b>2509</b>	3381	2697
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.2</b>	21.8	19.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>5.6</b>	6.8	8.1
Visc @ 100°C	cSt	ASTM D445	14	<b>12.9</b>	12.7	12.7


**FT-IR (Direct Trend)**

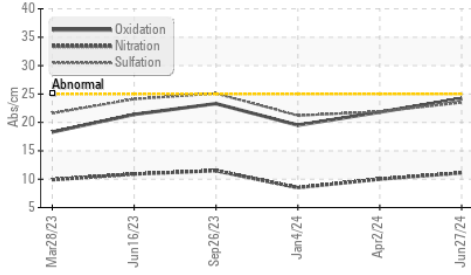


**Ferrous Alloys**

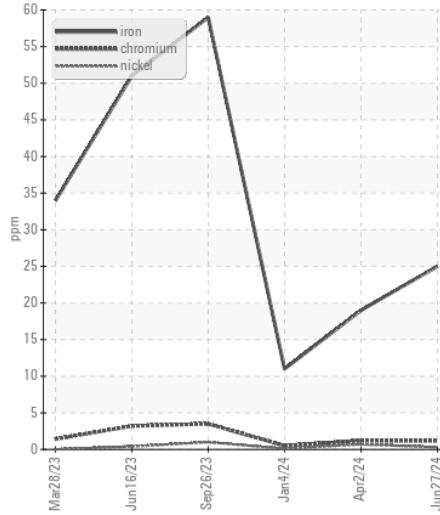


**Base Number**

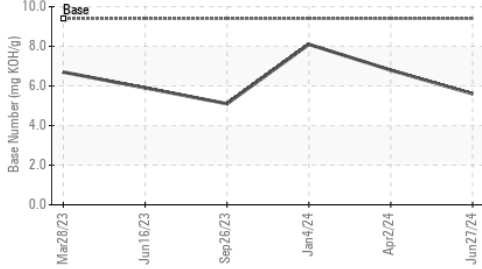


**Non-ferrous Metals**

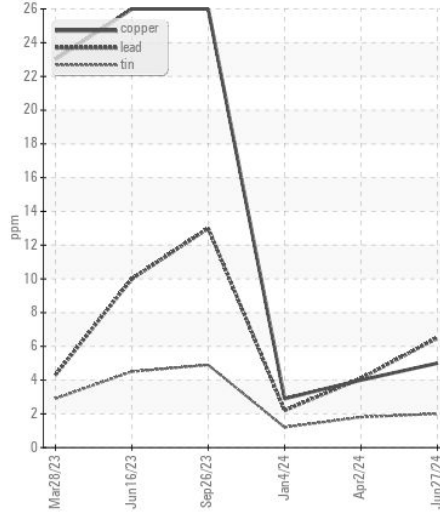


**Viscosity @ 100°C**

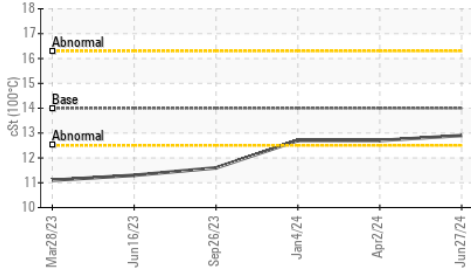

**Viscosity @ 100°C**

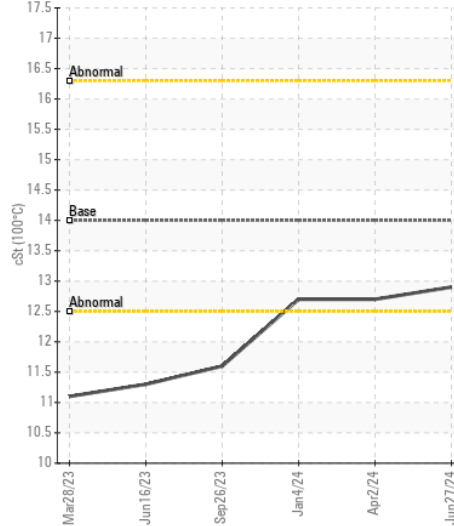

**Base Number**

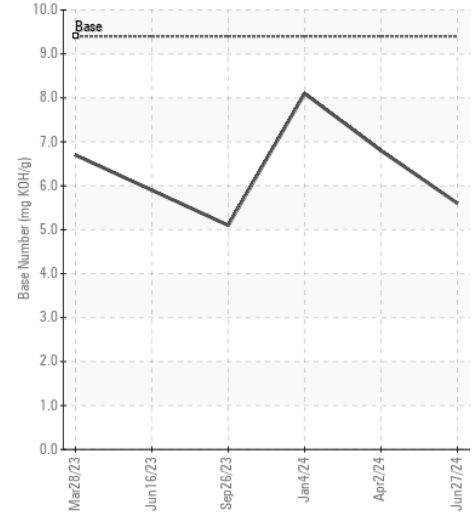

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RPL0021990

**Lab Number** : 06234514

**Unique Number** : 11123348

**Test Package** : FLEET

**Received** : 12 Jul 2024

**Tested** : 12 Jul 2024

**Diagnosed** : 12 Jul 2024 - Wes Davis

**RTL PACLEASE - 7007 - Fontana**

3121 South Riverside

Bloomington, CA

US 92316

Contact: Rudy Trevizo

TrevizoR@RushEnterprises.Com

T: (909)829-1044

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)