



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
813651
 Component
Diesel Engine
 Fluid
MOBIL DELVAC EXTREME 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0002942	RPL0008067	---
Sample Date		Client Info		02 Jul 2024	12 Sep 2023	---
Machine Age	hrs	Client Info		1726	22375	---
Oil Age	hrs	Client Info		110	22375	---
Filter Age	hrs	Client Info		110	22375	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	73	43	---
Chromium	ppm	ASTM D5185m	>20	<1	2	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	15	44	---
Lead	ppm	ASTM D5185m	>40	<1	2	---
Copper	ppm	ASTM D5185m	>330	4	29	---
Tin	ppm	ASTM D5185m	>15	<1	2	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	8	39	---
Potassium	ppm	ASTM D5185m	>20	38	152	---
Fuel		WC Method	>5	<1.0	0.5	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	6.0	10.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	20.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	10	---
Boron	ppm	ASTM D5185m		5	27	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		75	16	---
Manganese	ppm	ASTM D5185m		<1	5	---
Magnesium	ppm	ASTM D5185m		1104	740	---
Calcium	ppm	ASTM D5185m		1263	1275	---
Phosphorus	ppm	ASTM D5185m		1178	700	---
Zinc	ppm	ASTM D5185m		1420	818	---
Sulfur	ppm	ASTM D5185m		3360	2534	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	16.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	9.6	6.3	---
Visc @ 100°C	cSt	ASTM D445	14.3	13.2	11.7	---


FT-IR (Direct Trend)

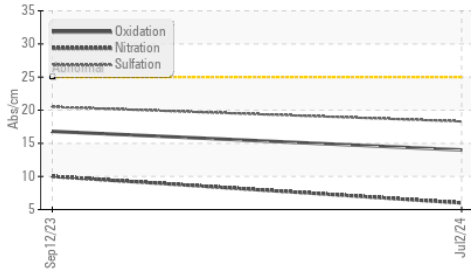


Ferrous Alloys

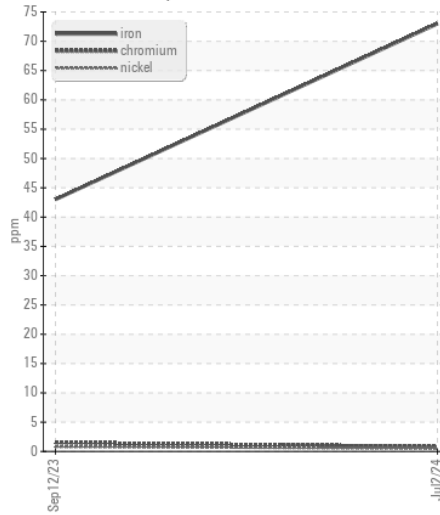


Base Number

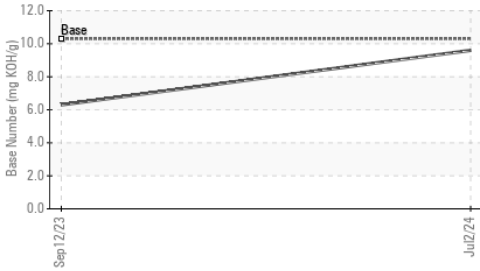


Non-ferrous Metals

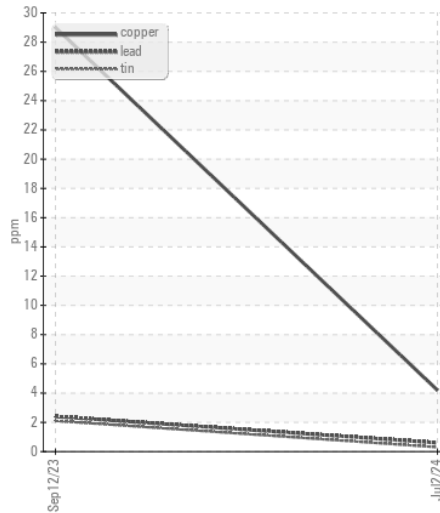


Viscosity @ 100°C

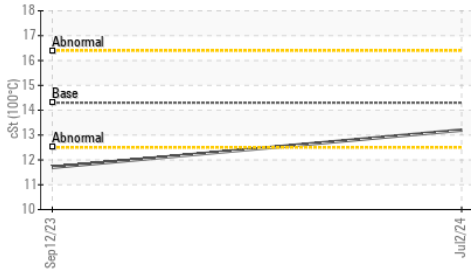

Viscosity @ 100°C

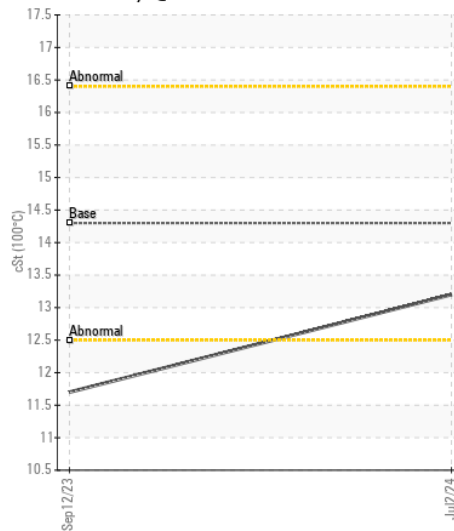

Base Number

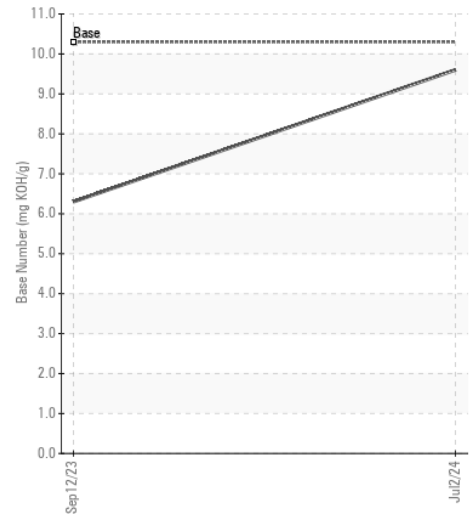

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0002942
Lab Number : 06234527
Unique Number : 11123361
Test Package : FLEET

Received : 12 Jul 2024
Tested : 12 Jul 2024
Diagnosed : 12 Jul 2024 - Wes Davis

RTL PACLEASE - 7017 - Oklahoma City
 8700 West I-40
 Oklahoma City, OK
 US 73128
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: