



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 149920

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0021165	RPL0003536	---
Sample Date		Client Info		09 Jul 2024	15 Mar 2023	---
Machine Age	hrs	Client Info		9428	0	---
Oil Age	hrs	Client Info		9428	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	8	29	---
Chromium	ppm	ASTM D5185m	>4	<1	3	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	14	---
Lead	ppm	ASTM D5185m	>45	0	3	---
Copper	ppm	ASTM D5185m	>85	<1	1	---
Tin	ppm	ASTM D5185m	>4	0	1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	6	7	---
Potassium	ppm	ASTM D5185m	>20	3	32	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	5.9	11.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	23.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<1	<1	---
Boron	ppm	ASTM D5185m	250	4	28	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	62	48	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	450	924	560	---
Calcium	ppm	ASTM D5185m	3000	1117	1431	---
Phosphorus	ppm	ASTM D5185m	1150	1059	761	---
Zinc	ppm	ASTM D5185m	1350	1231	970	---
Sulfur	ppm	ASTM D5185m	4250	3007	2563	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	22.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.3	8.5	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	13.0	---


FT-IR (Direct Trend)

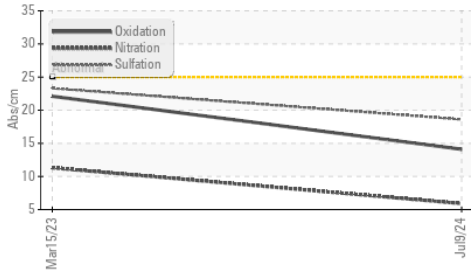


Ferrous Alloys

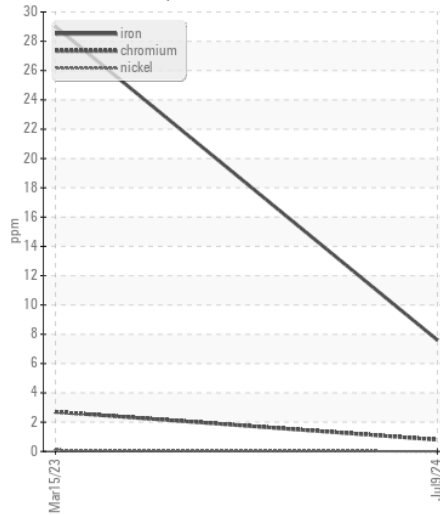


Base Number

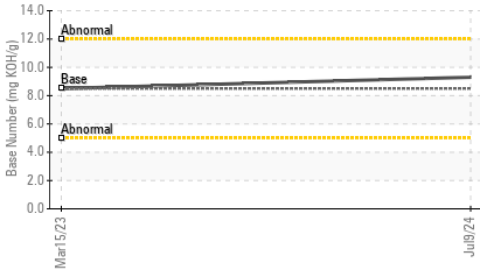


Non-ferrous Metals

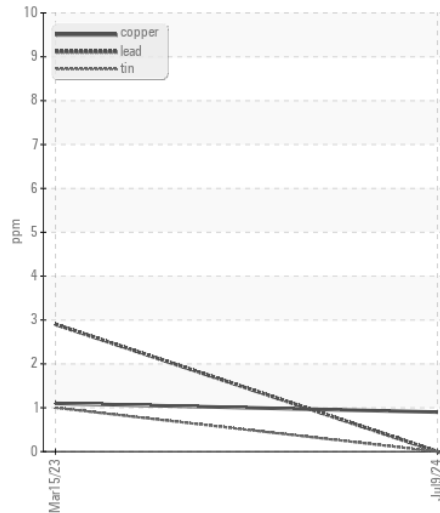


Viscosity @ 100°C

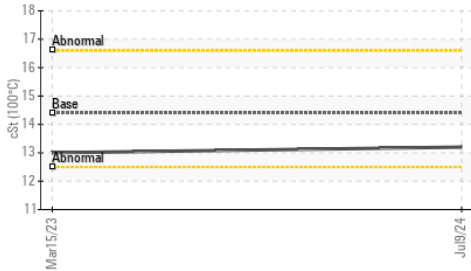

Viscosity @ 100°C

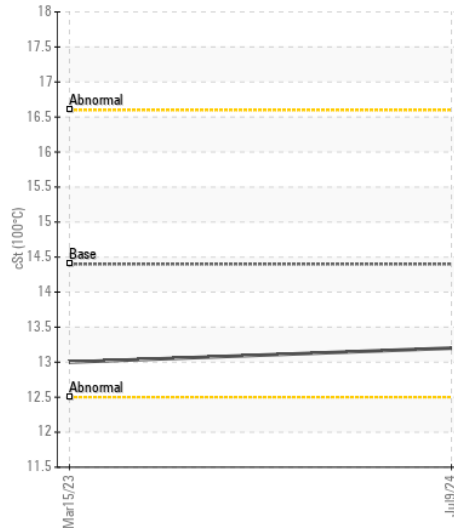

Base Number

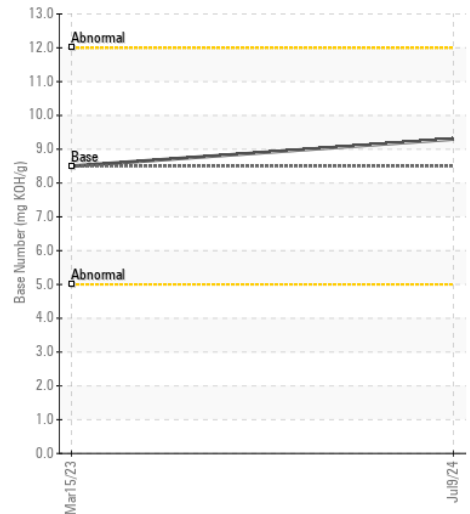

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0021165

Lab Number : 06234592

Unique Number : 11123426

Test Package : FLEET

Received : 12 Jul 2024

Tested : 12 Jul 2024

Diagnosed : 12 Jul 2024 - Wes Davis

RTL PACLEASE - 7020 - El Pao

3500 Doniphan Dr

El Paso, TX

US 79922

Contact: JUAN MARTINEZ

martinezj15@rushenterprises.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)