



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1754
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T4 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0909706	WC0866854	WC0866908
Sample Date		Client Info		03 Jul 2024	01 Feb 2024	01 Dec 2023
Machine Age	hrs	Client Info		4778	4095	3815
Oil Age	hrs	Client Info		250	250	250
Filter Age	hrs	Client Info		250	250	250
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	0	3
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	<1	<1
Lead	ppm	ASTM D5185m	>40	0	1	0
Copper	ppm	ASTM D5185m	>330	17	11	13
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	3	0	3
Potassium	ppm	ASTM D5185m	>20	8	7	5
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.2	6.4	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	19.7	19.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	1
Boron	ppm	ASTM D5185m		106	150	150
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		12	4	14
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		63	25	74
Calcium	ppm	ASTM D5185m		2327	1923	1824
Phosphorus	ppm	ASTM D5185m		1039	891	876
Zinc	ppm	ASTM D5185m		1205	1100	1114
Sulfur	ppm	ASTM D5185m		3334	3159	3128
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.5	15.9	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	7.1	8.0	7.7
Visc @ 100°C	cSt	ASTM D445	15	13.8	13.9	13.8


FT-IR (Direct Trend)

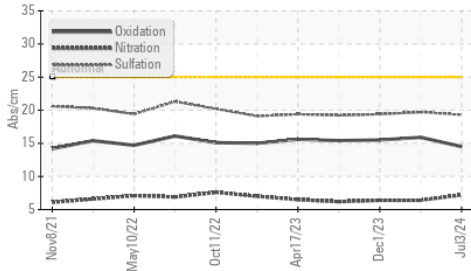


Base Number

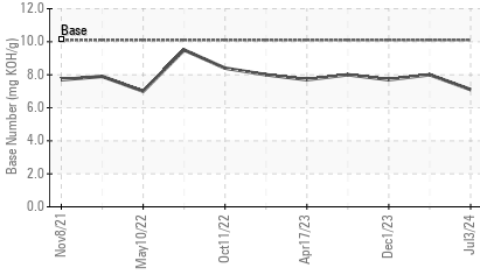


Viscosity @ 100°C

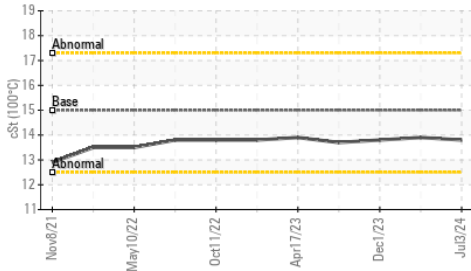


Ferrous Alloys

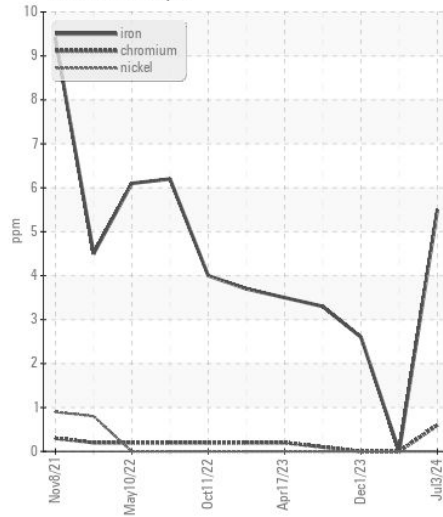



Non-ferrous Metals

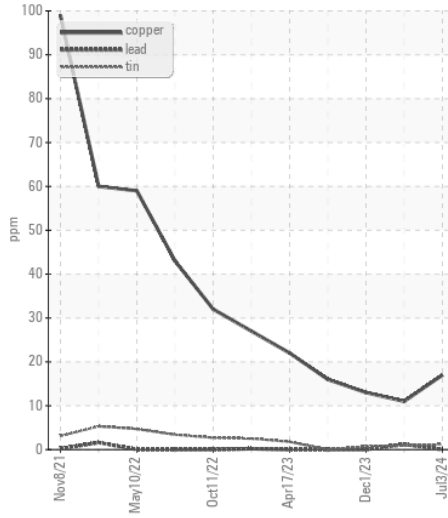

Viscosity @ 100°C

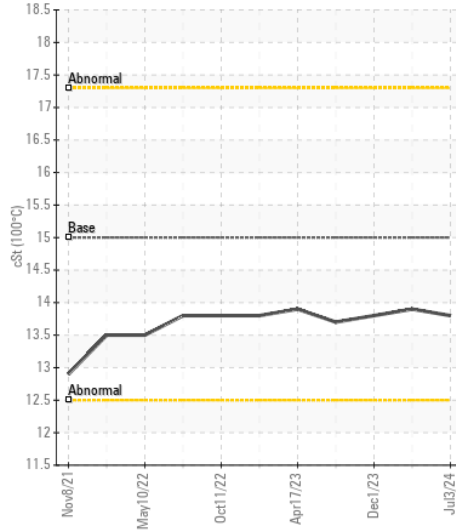

Base Number

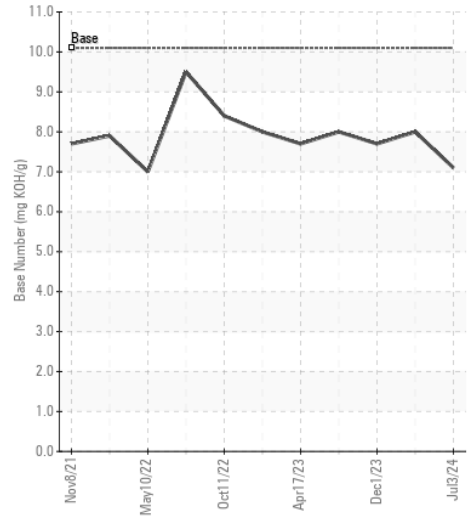

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0909706
Lab Number : 06234681
Unique Number : 11123515
Test Package : FLEET

Received : 12 Jul 2024
Tested : 15 Jul 2024
Diagnosed : 15 Jul 2024 - Wes Davis

GUY M TURNER & TURNER TRANSFER
 4505 SOUTH HOLDEN ROAD
 GREENSBORO, NC
 US 27406

Contact: ROGER HIXSON
 rhixson@guyturner.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)294-4660
 F: (336)294-6644