

# Machine Id WESTERN STAR WHITE WS (S/N PZ5248) **Diesel Engine** DIESEL ENGINE OIL SAE 15W40 (--- QTS)

#### RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

#### **WEAR**

Cylinder, crank, or cam shaft wear is indicated.


### CONTAMINATION

There is an abnormal amount of solids and carbon present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0838244		
Sample Date		Client Info		09 Jul 2024		
Machine Age	mls	Client Info		572667		
Oil Age	mls	Client Info		0		
Filter Age	mls	Client Info		0		
Oil Changed		Client Info		Changed		
Filter Changed		Client Info		Changed		
Sample Status				SEVERE		
Iron	ppm	ASTM D5185m	>100	A 270		
Chromium	ppm	ASTM D5185m	>20	3		
Nickel	ppm	ASTM D5185m	>4	<1		
Titanium	ppm	ASTM D5185m	0	<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	3		
Lead	ppm	ASTM D5185m	>40	3		
Copper	ppm	ASTM D5185m	>330	6		
Tin	ppm	ASTM D5185m	>15	4		
Vanadium	ppm	ASTM D5185m	NIGNE	<1 NONE		
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Silicon	ppm	ASTM D5185m	>25	<b>2</b> 6		
Potassium	ppm	ASTM D5185m	>20	2		
Fuel	1-1-	WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
Soot %	%	*ASTM D7844	>3	<b>7</b> .6		
Nitration	Abs/cm	*ASTM D7624	>20	34.5		
Sulfation	Abs/.1mm	*ASTM D7415	>30	55.0		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
0!'		AOTI / DE / AE				
Sodium	ppm	ASTM D5185m	>158	2		
Boron	ppm	ASTM D5185m	250	15		
Barium	ppm	ASTM D5185m	10	0		
Molybdenum	ppm	ASTM D5185m	100	43		
Manganese	ppm	ASTM D5185m	450	2		
Magnesium	ppm	ASTM D5185m	450	589		
Calcium	ppm	ASTM D5185m	3000	1271		
Phosphorus	ppm	ASTM D5185m	1150	901		
Zinc Sulfur	ppm	ASTM D5185m	1350	1034		
	ppm	ASTM D5185m	4250	2529		
Oxidation	Abs/.1mm	*ASTM D7414	>25	78.8		
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	0.0		

## **FLUID CONDITION**

The oil is oxidized and beyond the limit of serviceability. The oil is no longer serviceable due to the presence of contaminants.

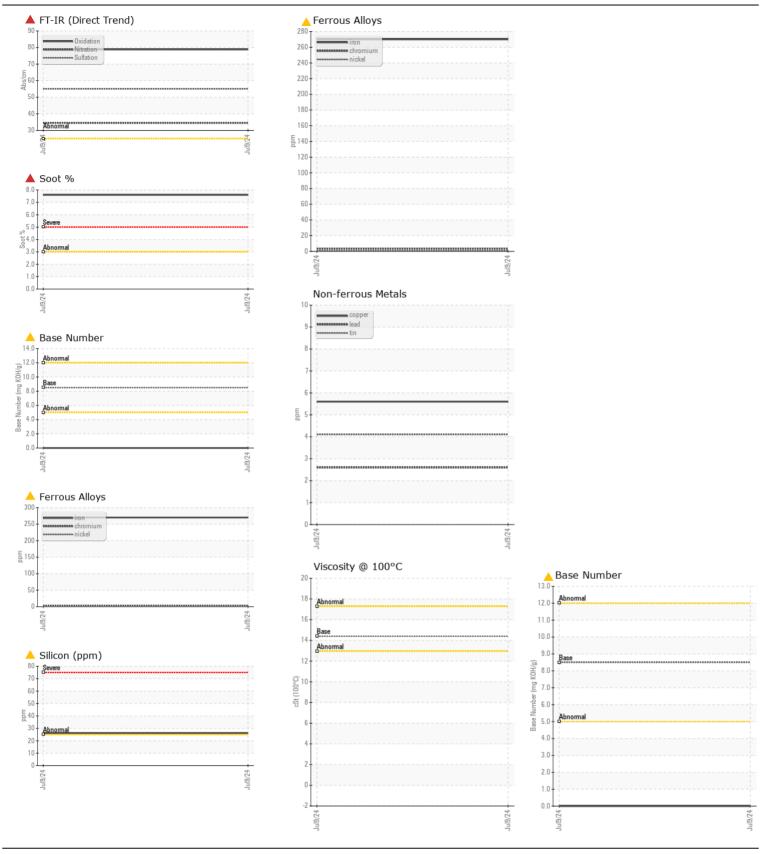

CADE FORESTRY Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Sample No. : WC0838244 Received 9128 LINWOOD AVE : 12 Jul 2024 È Lab Number : 06234696 SHREVEPORT, LA Tested : 17 Jul 2024 Unique Number : 11123530 : 17 Jul 2024 - Jonathan Hester Diagnosed US 71106 Test Package : FLEET Contact: Service Manager Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (318)688-5119 

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

Contact/Location: Service Manager - CADSHRWC Page 2 of 2