



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**SENNEBOGEN 830E MS17**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0244795</b>	LH0244788	LH0244785
Sample Date		Client Info		<b>29 Jun 2024</b>	08 Feb 2024	11 Dec 2023
Machine Age	hrs	Client Info		<b>8654</b>	7932	7567
Oil Age	hrs	Client Info		<b>0</b>	500	0
Filter Age	hrs	Client Info		<b>0</b>	500	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>17</b>	11	18
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	2	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	2	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>2</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.3	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.0</b>	7.8	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	18.9	21.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>&lt;1</b>	2	<1
Boron	ppm	ASTM D5185m	250	<b>&lt;1</b>	4	9
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>63</b>	53	60
Manganese	ppm	ASTM D5185m		<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m	450	<b>961</b>	974	975
Calcium	ppm	ASTM D5185m	3000	<b>1186</b>	1248	1167
Phosphorus	ppm	ASTM D5185m	1150	<b>1068</b>	1130	1014
Zinc	ppm	ASTM D5185m	1350	<b>1285</b>	1345	1351
Sulfur	ppm	ASTM D5185m	4250	<b>2599</b>	3863	3037
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.6</b>	14.9	17.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.8</b>	7.7	7.1
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.6</b>	13.4	13.4


**FT-IR (Direct Trend)**

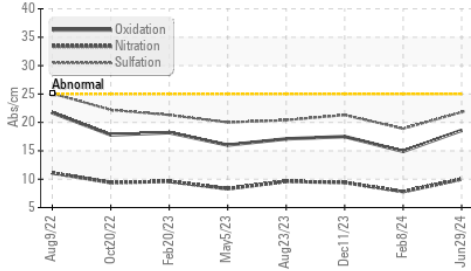


**Ferrous Alloys**

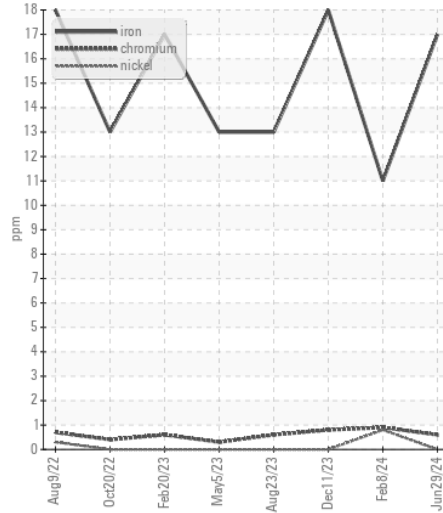


**Base Number**

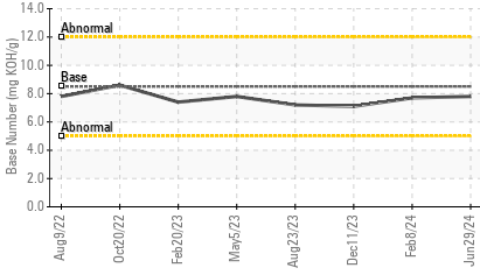


**Non-ferrous Metals**

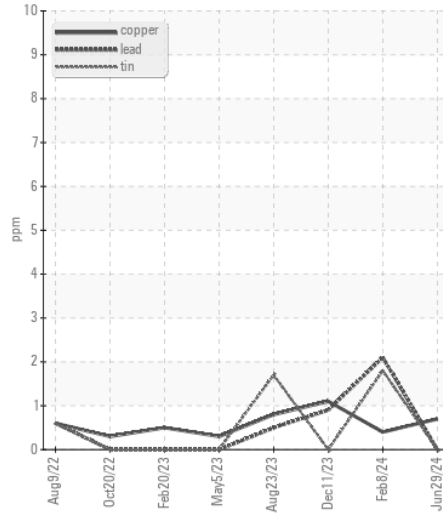


**Viscosity @ 100°C**

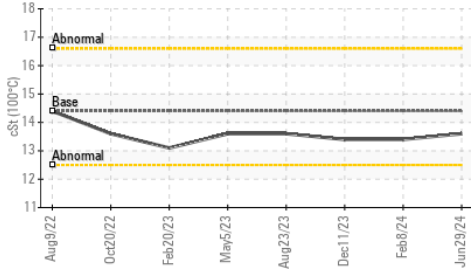

**Viscosity @ 100°C**

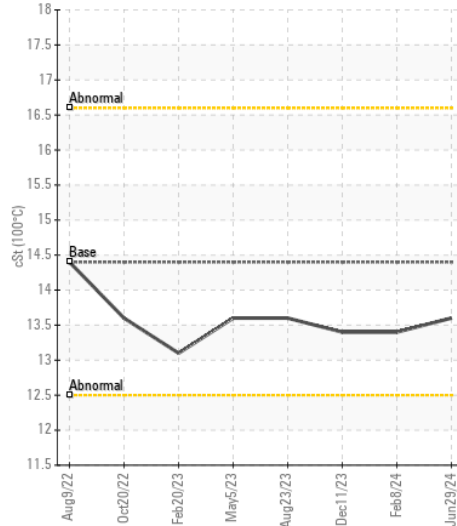

**Base Number**

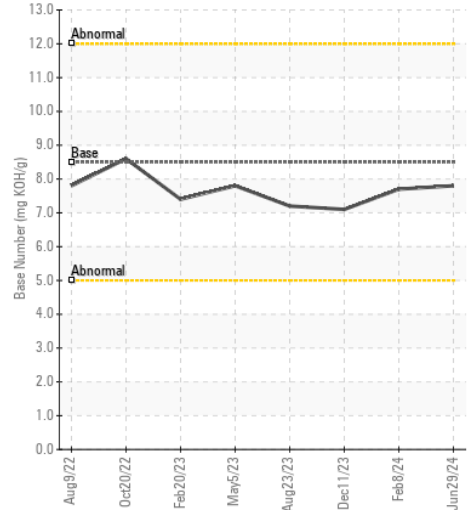

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LH0244795 **Received** : 12 Jul 2024  
**Lab Number** : 06234702 **Tested** : 15 Jul 2024  
**Unique Number** : 11123536 **Diagnosed** : 15 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**OSCAR WINSKI CO. INC**  
 2407 N. 9TH STREET  
 LAFAYETTE, IN  
 US 47904

Contact: JAYSON FRAZIER  
 frazierj@oscarwinski.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (765)376-1230

F: x: