



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Mobile Fleet**  
 Machine Id  
**6436 6436**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 10W30 (10 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0956027</b>	WC0939347	WC0918597
Sample Date		Client Info		<b>10 Jul 2024</b>	08 May 2024	20 Mar 2024
Machine Age	hrs	Client Info		<b>9312</b>	8888	8607
Oil Age	hrs	Client Info		<b>710</b>	286	407
Filter Age	hrs	Client Info		<b>710</b>	286	407
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	ATTENTION	ATTENTION

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>65	<b>9</b>	5	8
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	2
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>35	<b>4</b>	2	2
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	1
Copper	ppm	ASTM D5185m	>180	<b>12</b>	10	12
Tin	ppm	ASTM D5185m	>8	<b>&lt;1</b>	1	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	<b>5</b>	7	8
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	3
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	6.4	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	21.6	22.2
Particles >4µm		ASTM D7647	>20000	<b>3915</b>	16625	9500
Particles >6µm		ASTM D7647	>5000	<b>2133</b>	9057	5175
Particles >14µm		ASTM D7647	>640	<b>363</b>	1541	881
Particles >21µm		ASTM D7647	>160	<b>122</b>	519	297
Particles >38µm		ASTM D7647	>40	<b>19</b>	80	46
Particles >71µm		ASTM D7647	>10	<b>2</b>	8	5
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>19/18/16</b>	21/20/18	20/20/17
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Boron	ppm	ASTM D5185m		<b>26</b>	63	55
Barium	ppm	ASTM D5185m		<b>0</b>	2	1
Molybdenum	ppm	ASTM D5185m		<b>50</b>	53	44
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>504</b>	509	481
Calcium	ppm	ASTM D5185m		<b>1744</b>	1687	1673
Phosphorus	ppm	ASTM D5185m		<b>718</b>	778	782
Zinc	ppm	ASTM D5185m		<b>923</b>	915	904
Sulfur	ppm	ASTM D5185m		<b>2007</b>	2646	2559
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.2</b>	19.4	20.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>8.6</b>	9.4	9.5
Visc @ 100°C	cSt	ASTM D445	11.9	<b>11.5</b>	11.2	11.4

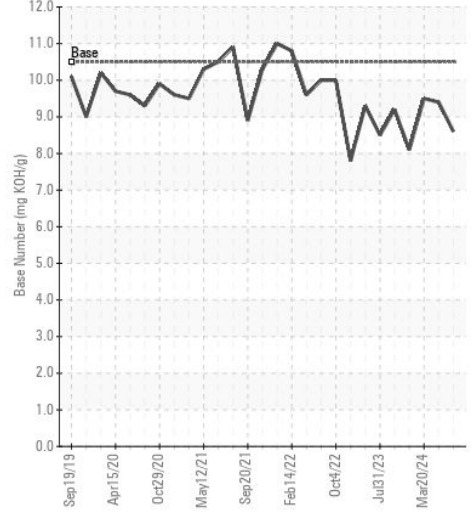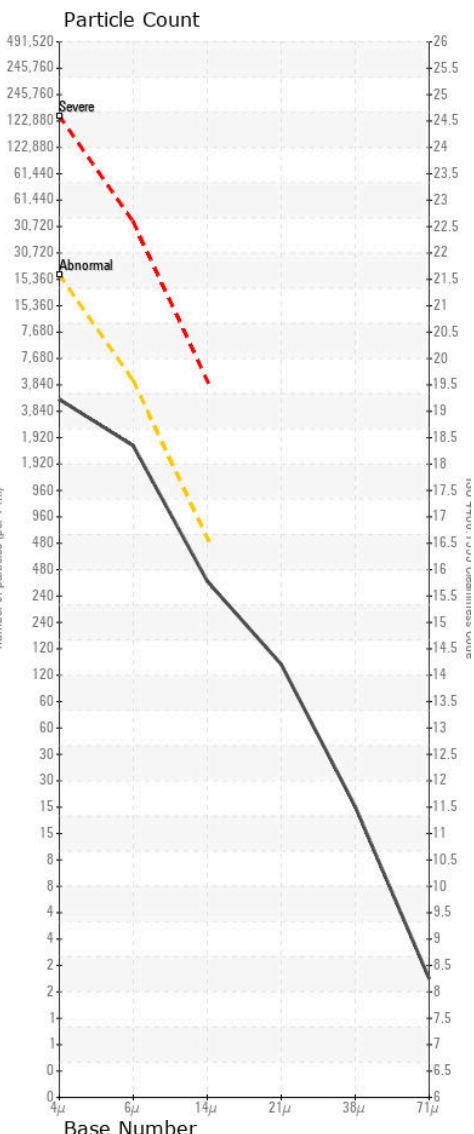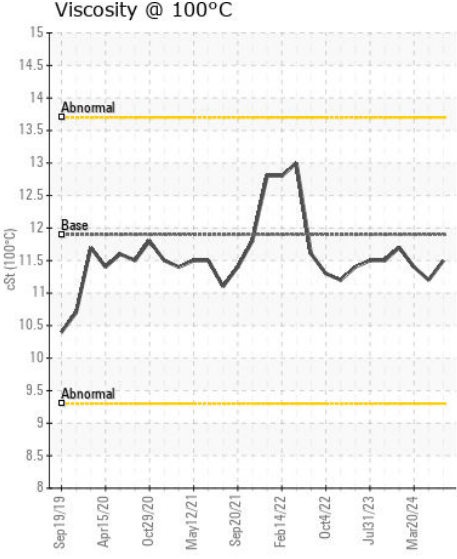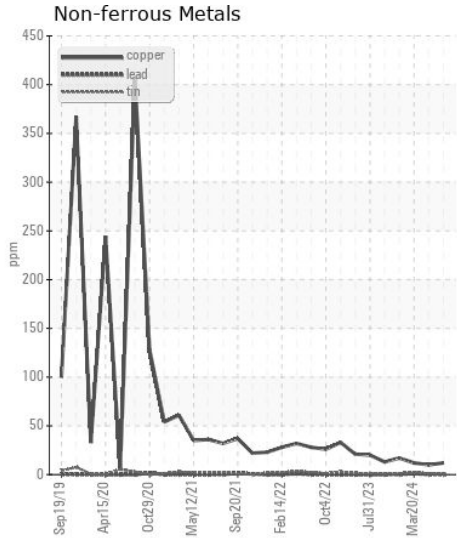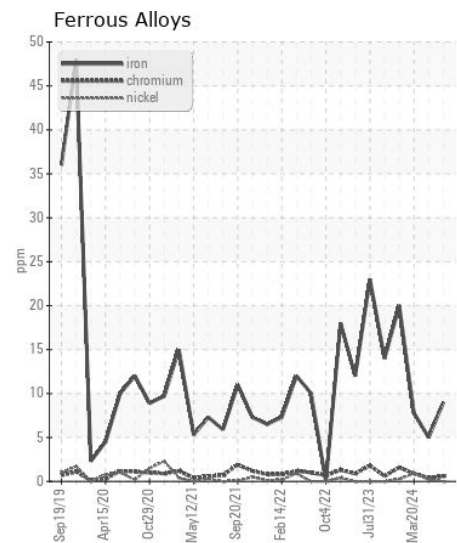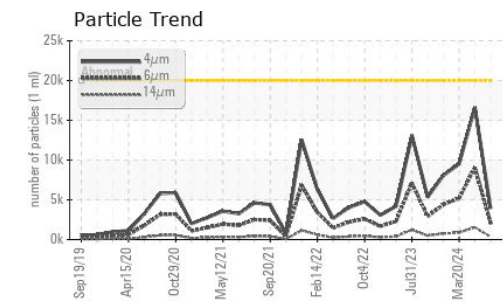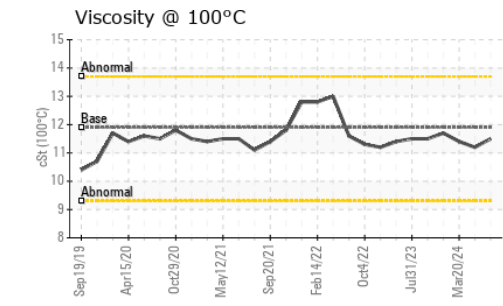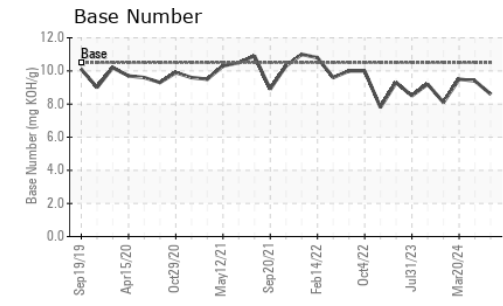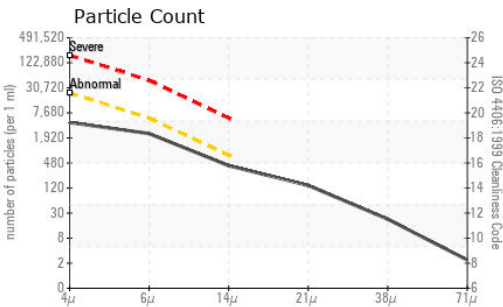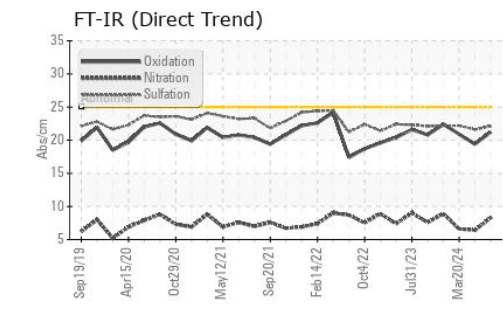

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0956027  
**Lab Number** : 06234751  
**Unique Number** : 11123585  
**Test Package** : CONST ( Additional Tests: PrtCount, TBN )  
**Received** : 12 Jul 2024  
**Tested** : 15 Jul 2024  
**Diagnosed** : 15 Jul 2024 - Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CAROLINA SUNROCK**  
 PO BOX 25  
 BUTNER, NC  
 US 27509  
 Contact: Leigh Dennis  
 rdennis@thesunrockgroup.com  
 T: (919)575-4505  
 F: (919)575-0162