



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

## Mobile Fleet

Machine Id

### 6415 6415

Component

## Diesel Engine

Fluid

### MOBIL DELVAC 1300 SUPER 10W30 (10 GAL)

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0956025</b>	WC0939310	WC0918663
Sample Date		Client Info		<b>10 Jul 2024</b>	15 May 2024	21 Mar 2024
Machine Age	hrs	Client Info		<b>15655</b>	15469	15283
Oil Age	hrs	Client Info		<b>199</b>	201	269
Filter Age	hrs	Client Info		<b>199</b>	201	269
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status				<b>NORMAL</b>	ABNORMAL	ATTENTION

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>16</b>	18	11
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	7	5
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	1	0
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	10	7
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	6	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.5</b>	7.8	6.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	22.2	21.9
Particles >4µm		ASTM D7647	>20000	<b>4567</b>	17425	9970
Particles >6µm		ASTM D7647	>5000	<b>2488</b>	▲ 9493	● 5431
Particles >14µm		ASTM D7647	>640	<b>423</b>	▲ 1616	● 924
Particles >21µm		ASTM D7647	>160	<b>143</b>	▲ 544	● 311
Particles >38µm		ASTM D7647	>40	<b>22</b>	▲ 84	● 48
Particles >71µm		ASTM D7647	>10	<b>2</b>	9	5
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>19/18/16</b>	▲ 21/20/18	● 20/20/17
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	10	2
Boron	ppm	ASTM D5185m		<b>43</b>	43	49
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>46</b>	48	44
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>482</b>	540	536
Calcium	ppm	ASTM D5185m		<b>1686</b>	1819	1843
Phosphorus	ppm	ASTM D5185m		<b>764</b>	803	816
Zinc	ppm	ASTM D5185m		<b>896</b>	951	950
Sulfur	ppm	ASTM D5185m		<b>2283</b>	2975	3114
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.3</b>	19.9	19.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>9.6</b>	9.7	9.7
Visc @ 100°C	cSt	ASTM D445	11.9	<b>11.3</b>	11.6	11.5

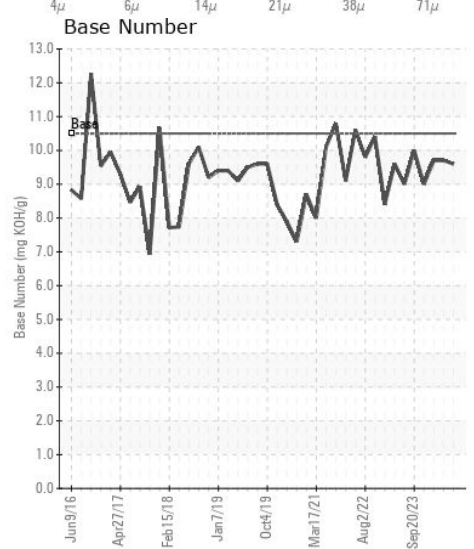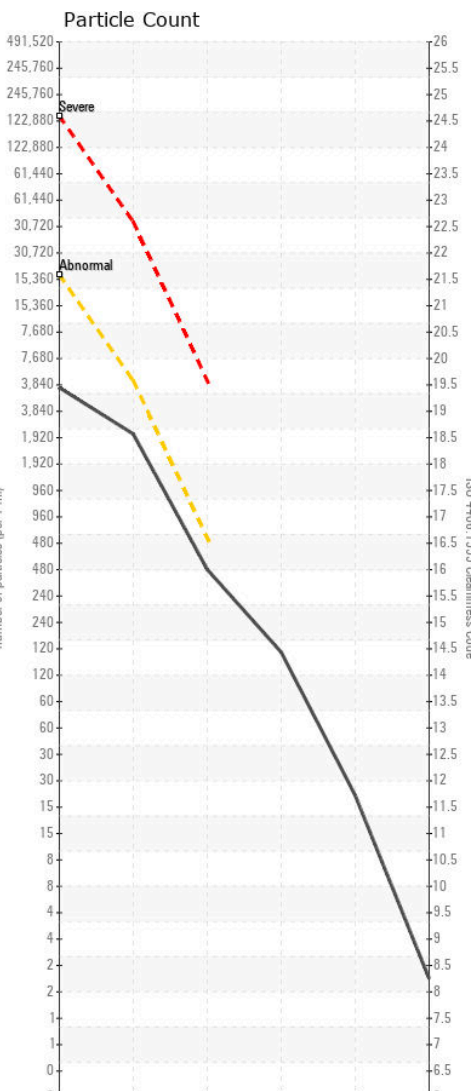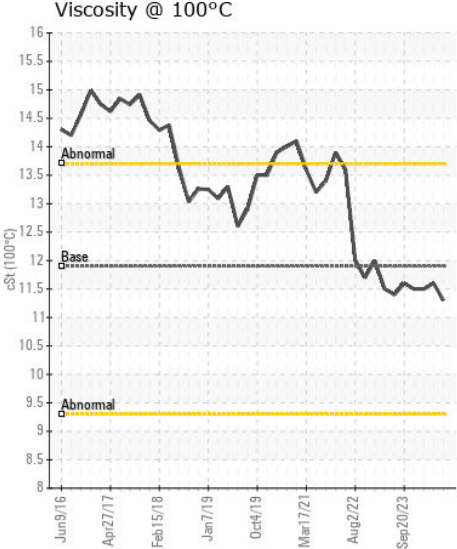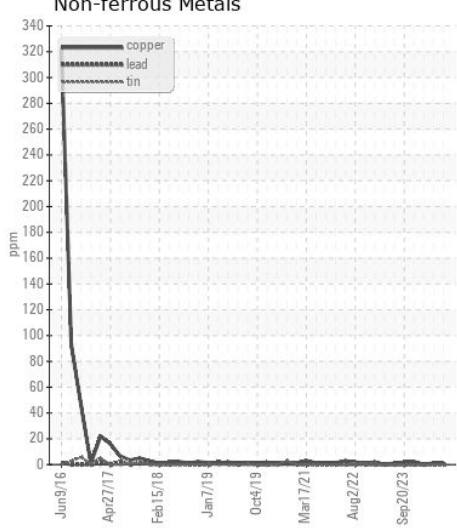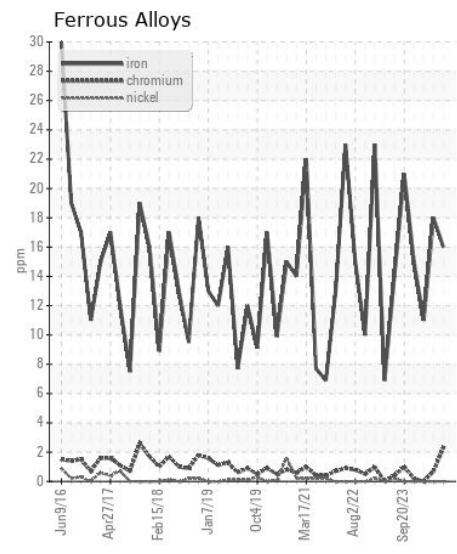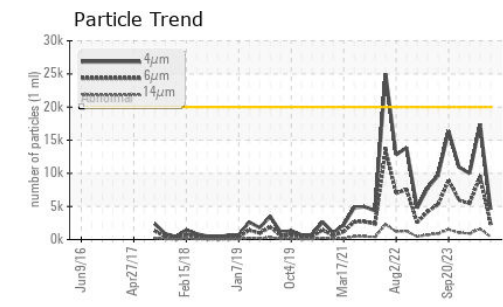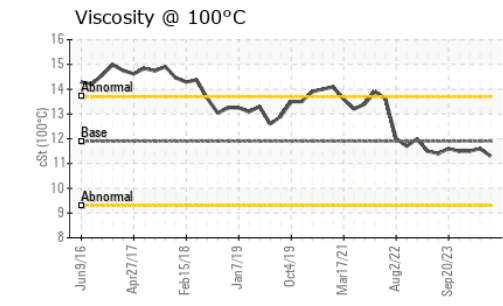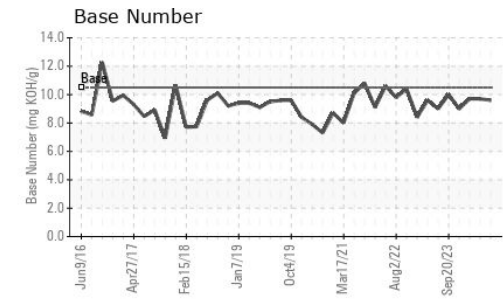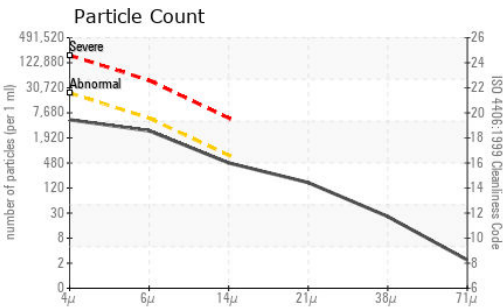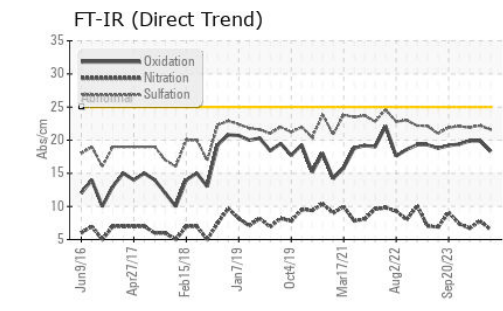

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0956025 **Received** : 12 Jul 2024  
**Lab Number** : 06234753 **Tested** : 15 Jul 2024  
**Unique Number** : 11123587 **Diagnosed** : 15 Jul 2024 - Don Baldridge  
**Test Package** : CONST ( Additional Tests: PrtCount, TBN )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CAROLINA SUNROCK**  
 PO BOX 25  
 BUTNER, NC  
 US 27509  
 Contact: Leigh Dennis  
 rdennis@thesunrockgroup.com  
 T: (919)575-4505  
 F: (919)575-0162