



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PRE FEEDER 4561
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 46 (40 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PTK0005324	PTK0002437	PTK0000224
Sample Date		Client Info		18 Jun 2024	07 Dec 2022	14 Jun 2021
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Filter Age	mths	Client Info		0	4	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	2	2	20
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>75	8	5	44
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<1	1	<1
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647		539	2040	1815
Particles >6µm		ASTM D7647	>2500	175	605	445
Particles >14µm		ASTM D7647	>320	17	65	47
Particles >21µm		ASTM D7647	>80	3	23	19
Particles >38µm		ASTM D7647	>20	0	3	3
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/15	15/11	16/13	18/16/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	<1	5
Boron	ppm	ASTM D5185m	5	0	0	2
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	<1	<1	<1
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	25	50	56	10
Calcium	ppm	ASTM D5185m	200	25	22	71
Phosphorus	ppm	ASTM D5185m	300	270	302	297
Zinc	ppm	ASTM D5185m	370	313	348	417
Sulfur	ppm	ASTM D5185m	2500	963	1118	2271
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.35	0.39	0.481
Visc @ 40°C	cSt	ASTM D445	46	44.5	45.1	44.9

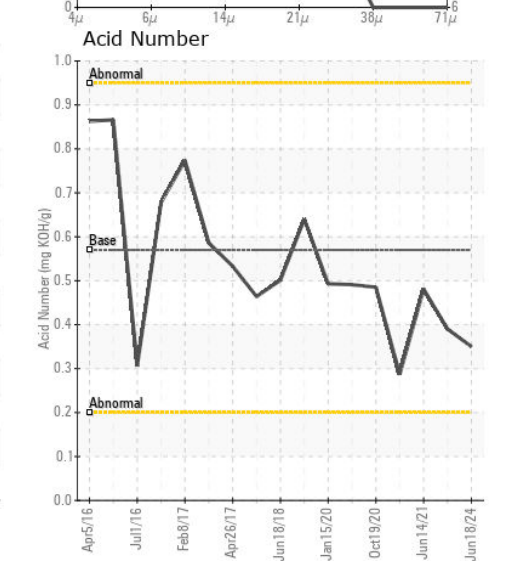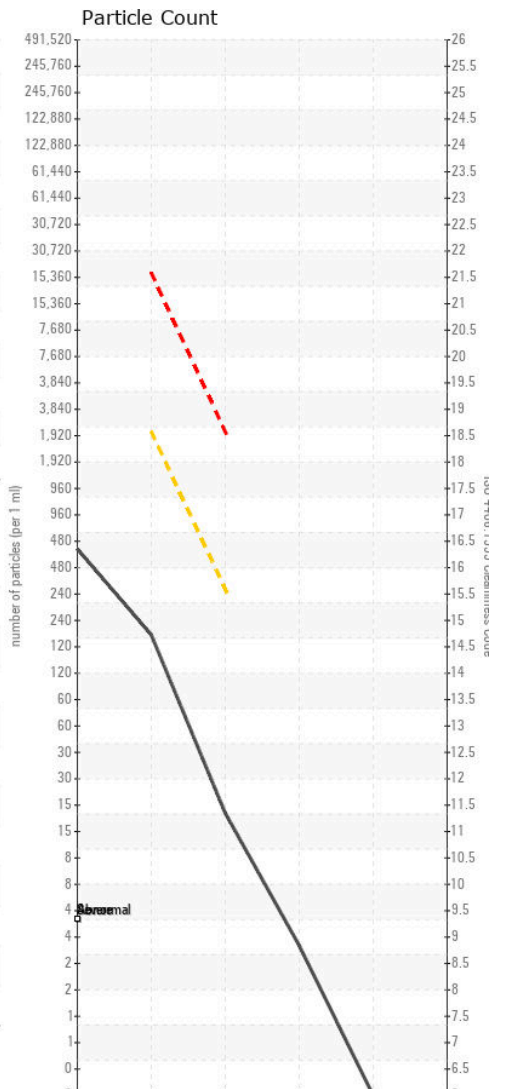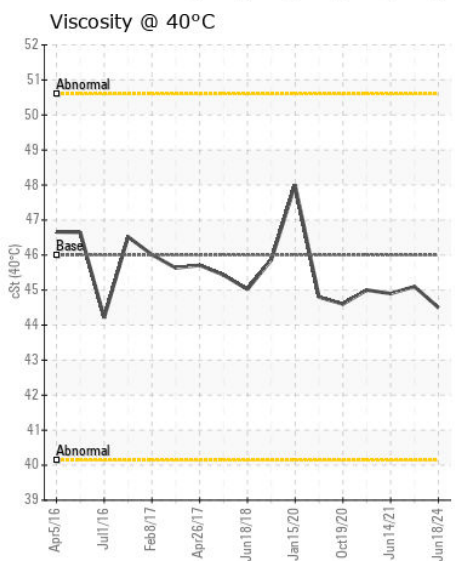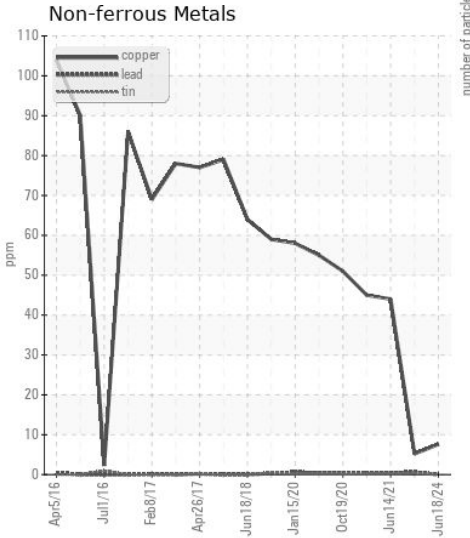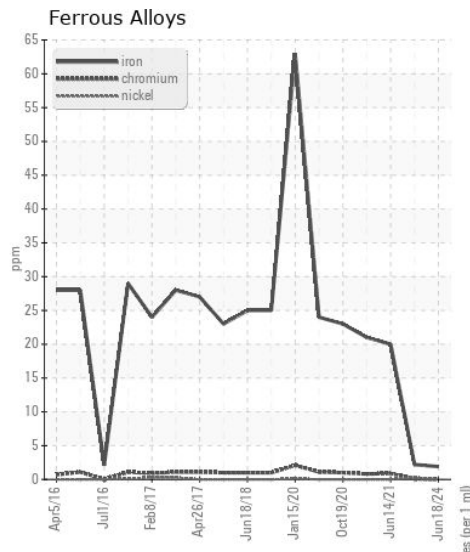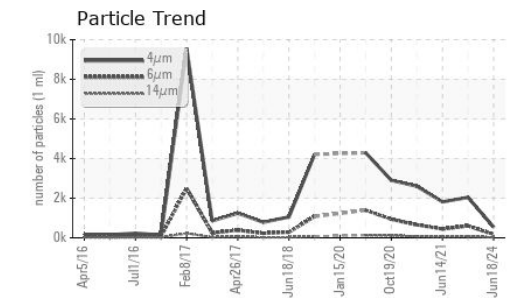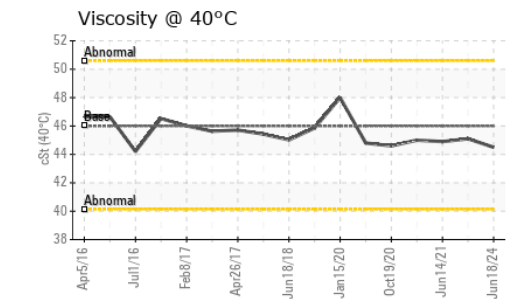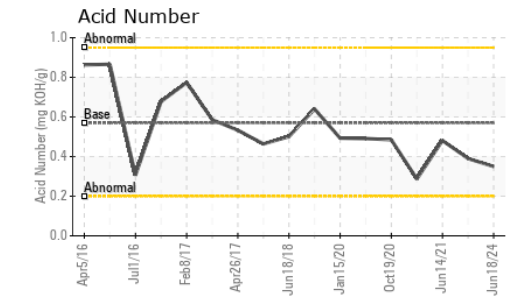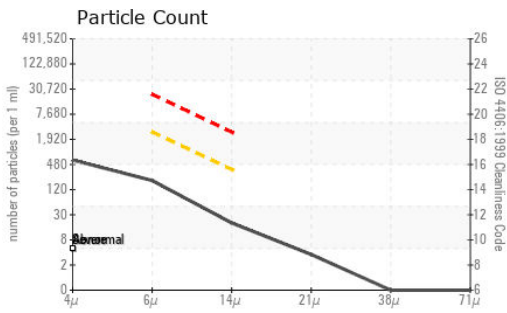

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0005324 **Received** : 12 Jul 2024
Lab Number : 06234835 **Tested** : 15 Jul 2024
Unique Number : 11123669 **Diagnosed** : 15 Jul 2024 - Wes Davis
Test Package : MOB 2

WEST ROCK CP LLC
 577 GODDARD
 CHESTERFIELD, MO
 US 63005
 Contact:
 kohmes@rocktenn.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)