



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**MACK GR64F XT2510 (S/N 1M2GR4GC4LM016156)**  
 Component  
**2 Axle**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.











## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0031057	---	---
Sample Date		Client Info		05 Jul 2024	---	---
Machine Age	mls	Client Info		146007	---	---
Oil Age	mls	Client Info		146007	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m	>870	222	---	---
Chromium	ppm	ASTM D5185m	>3	<1	---	---
Nickel	ppm	ASTM D5185m	>20	<1	---	---
Titanium	ppm	ASTM D5185m	>4	<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	2	---	---
Lead	ppm	ASTM D5185m	>25	1	---	---
Copper	ppm	ASTM D5185m	>60	15	---	---
Tin	ppm	ASTM D5185m	>5	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>285	241	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		131	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		40	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		59	---	---
Phosphorus	ppm	ASTM D5185m		1010	---	---
Zinc	ppm	ASTM D5185m		15	---	---
Sulfur	ppm	ASTM D5185m		23157	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.40	---	---
Visc @ 40°C	cSt	ASTM D445		129	---	---

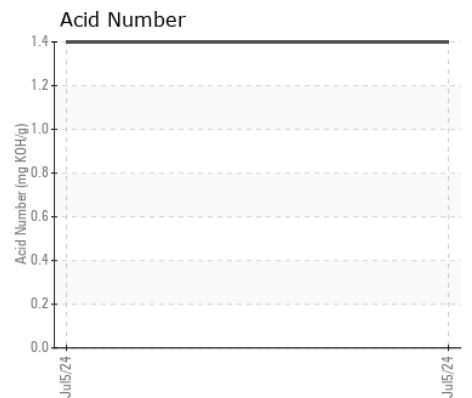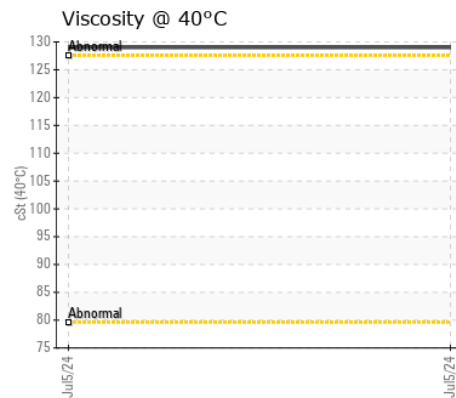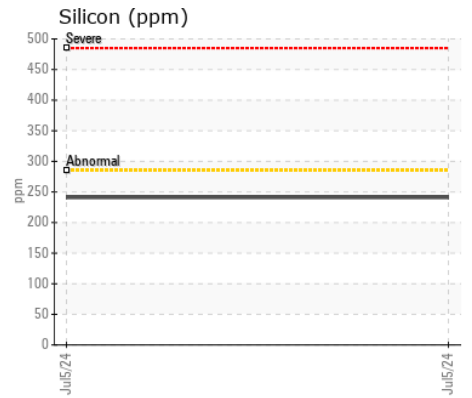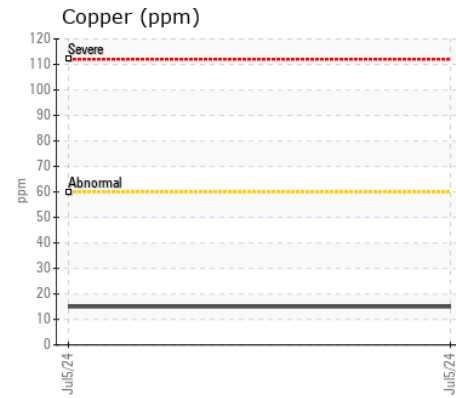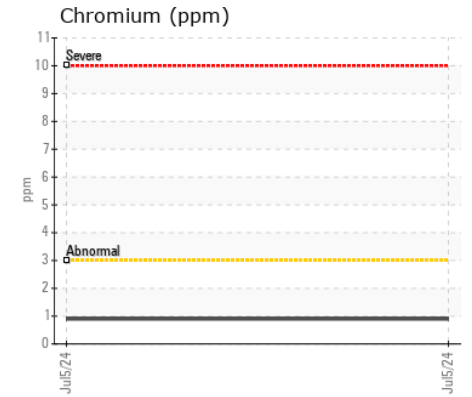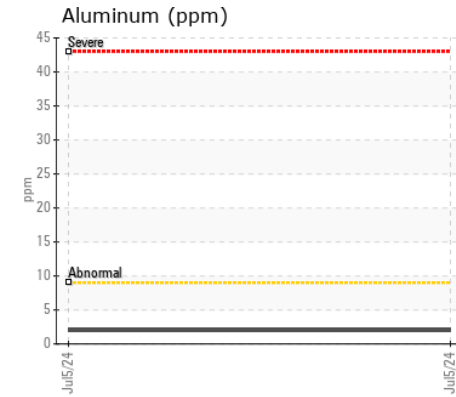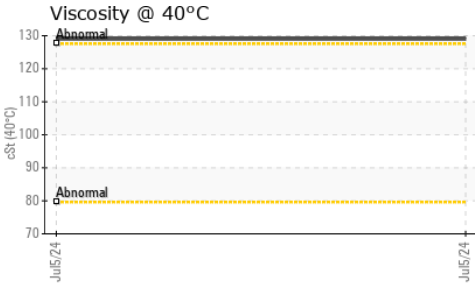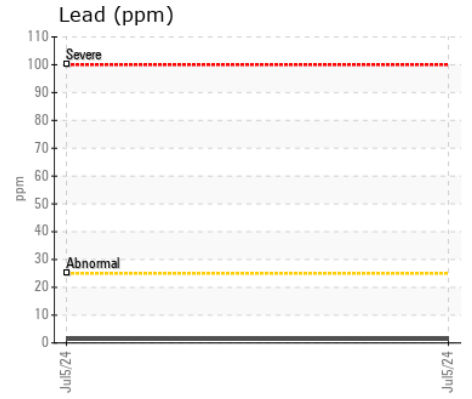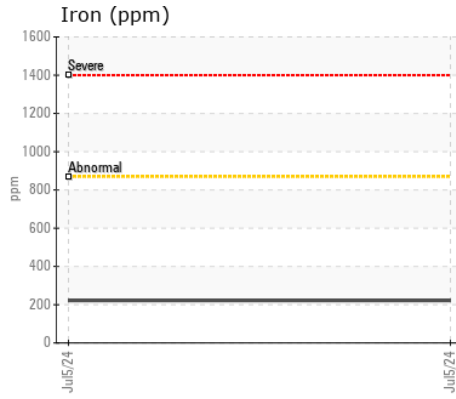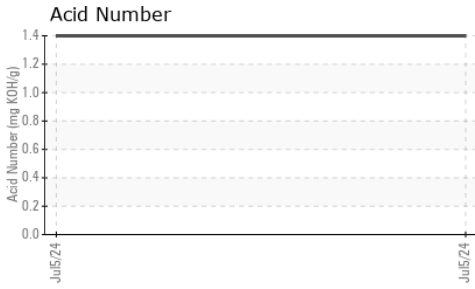

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : DC0031057

**Lab Number** : 06235091

**Unique Number** : 11123925

**Test Package** : MOB 2

**Received** : 12 Jul 2024

**Tested** : 15 Jul 2024

**Diagnosed** : 15 Jul 2024 - Don Baldrige

**COMER CONSTRUCTION**

2100 SLADE LANE

FOREST HILL, MD

US 21050

Contact: FRED RICE

frice@comerconstruction.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (410)638-0289