



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 330DL EX6125 (S/N 0MWP03368)
 Component
Left Final Drive
 Fluid
DURALENE Dura-Trans TO-4 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0031330	DC0032541	---
Sample Date		Client Info		04 Jun 2024	12 Jan 2024	---
Machine Age	hrs	Client Info		15264	15202	---
Oil Age	hrs	Client Info		15264	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	315	260	---
Chromium	ppm	ASTM D5185m	>10	1	1	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m	>15	1	1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>75	18	15	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>75	1	2	---
Tin	ppm	ASTM D5185m	>8	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	67	58	---
Potassium	ppm	ASTM D5185m	>20	4	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	4	---
Boron	ppm	ASTM D5185m		13	6	---
Barium	ppm	ASTM D5185m		0	1	---
Molybdenum	ppm	ASTM D5185m		6	6	---
Manganese	ppm	ASTM D5185m		2	3	---
Magnesium	ppm	ASTM D5185m		59	60	---
Calcium	ppm	ASTM D5185m		2980	2802	---
Phosphorus	ppm	ASTM D5185m		1078	1032	---
Zinc	ppm	ASTM D5185m		1320	1238	---
Sulfur	ppm	ASTM D5185m		14505	11808	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.72	1.84	---
Visc @ 40°C	cSt	ASTM D445		167	166	---

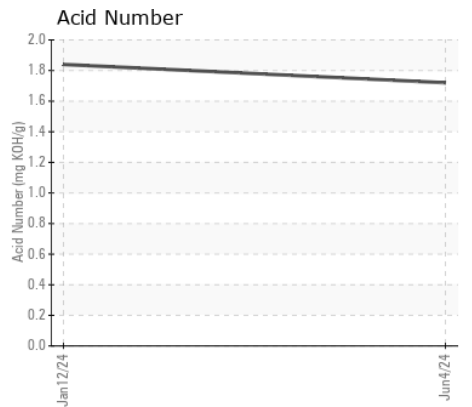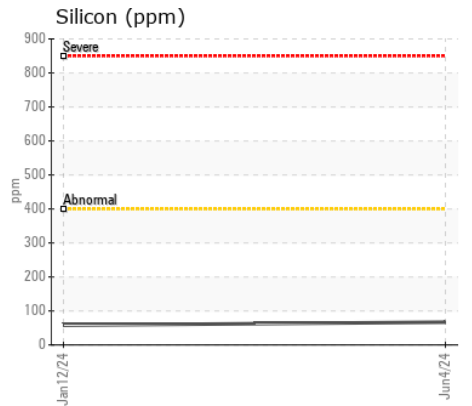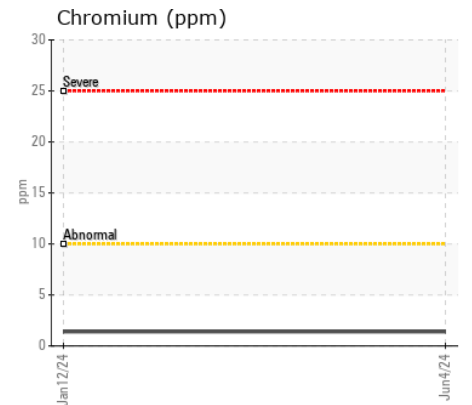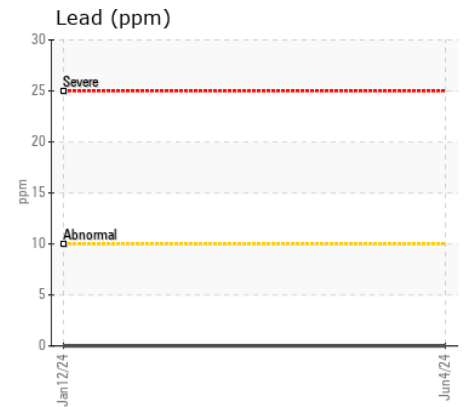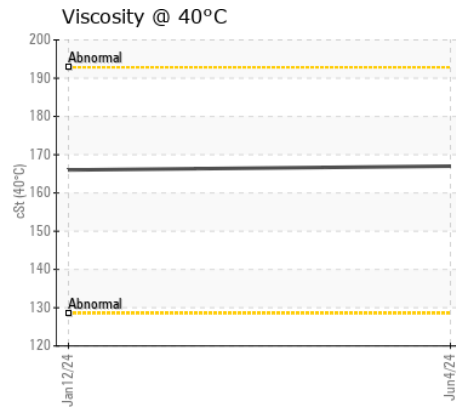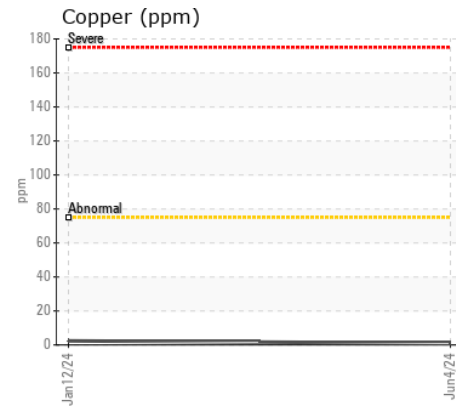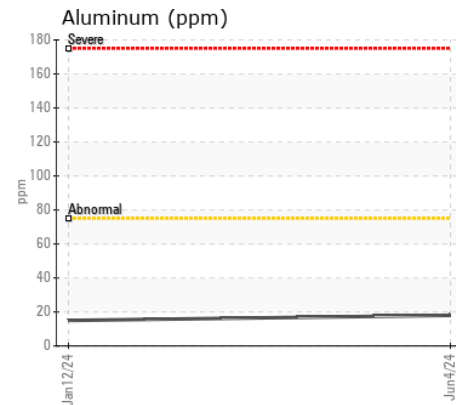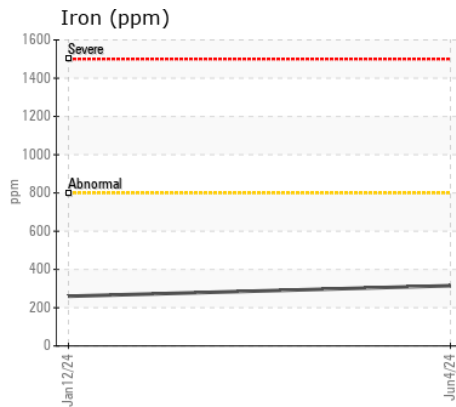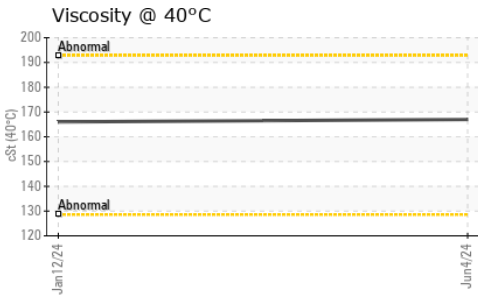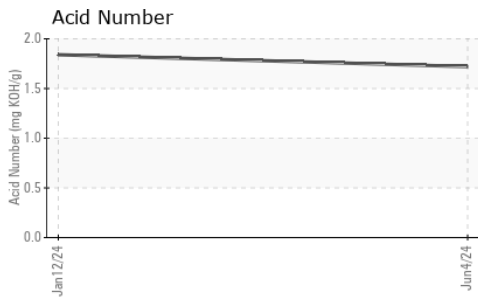

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0031330
Lab Number : 06235099
Unique Number : 11123933
Test Package : MOB 2

Received : 12 Jul 2024
Tested : 15 Jul 2024
Diagnosed : 15 Jul 2024 - Wes Davis

COMER CONSTRUCTION
 2100 SLADE LANE
 FOREST HILL, MD
 US 21050
 Contact: DONALD FOX
 dfox@comerconstruction.com
 T: (443)269-1379
 F: (410)638-0289

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)