



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 336FL EX6130 (S/N 0RKB10354)
Component
Diesel Engine
Fluid
DURALENE Dura-Max Xtreme 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0035620	DC0030113	---
Sample Date		Client Info		08 Jul 2024	30 Oct 2023	---
Machine Age	hrs	Client Info		5080	5080	---
Oil Age	hrs	Client Info		5080	250	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	22	12	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	12	7	---
Lead	ppm	ASTM D5185m	>40	<1	1	---
Copper	ppm	ASTM D5185m	>330	<1	1	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	5	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	1	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	10.0	7.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	21.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	---
Boron	ppm	ASTM D5185m		29	41	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		62	54	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		522	526	---
Calcium	ppm	ASTM D5185m		1878	1851	---
Phosphorus	ppm	ASTM D5185m		1004	973	---
Zinc	ppm	ASTM D5185m		1203	1244	---
Sulfur	ppm	ASTM D5185m		3994	3609	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.5	17.6	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.18	8.87	---
Visc @ 100°C	cSt	ASTM D445		13.2	13.2	---

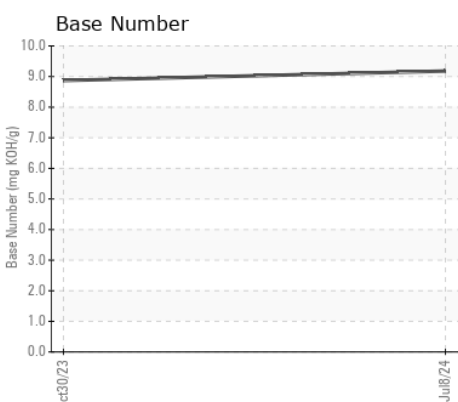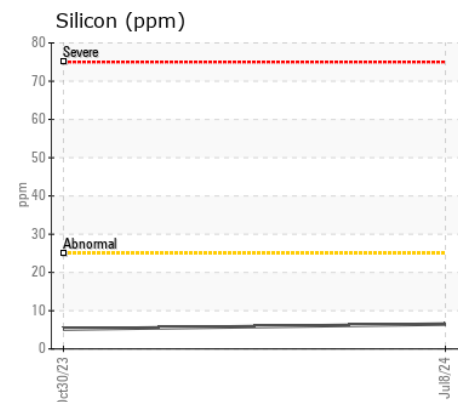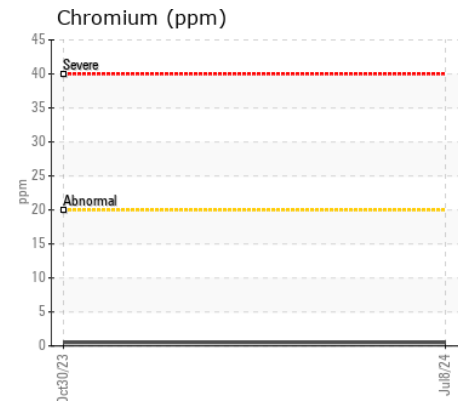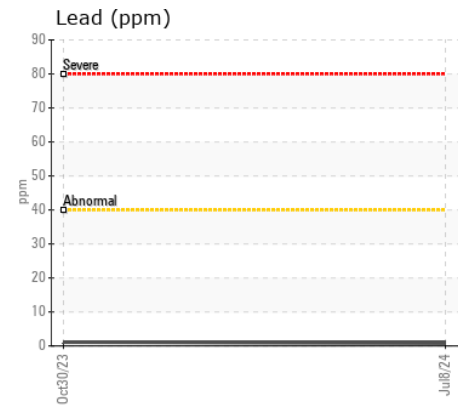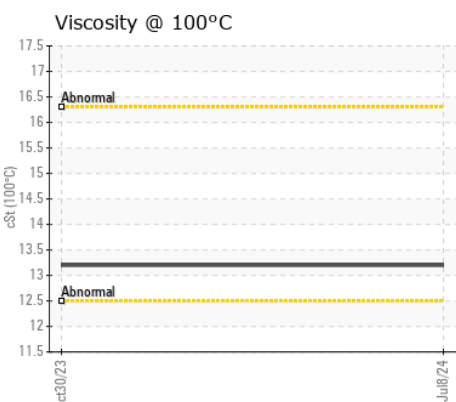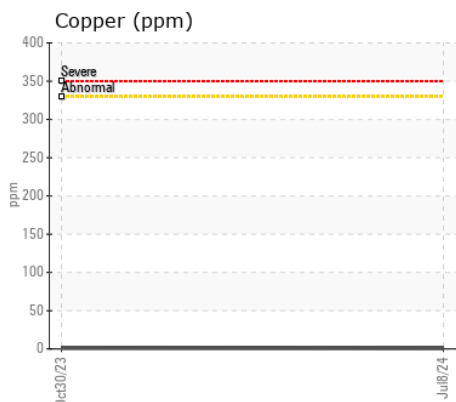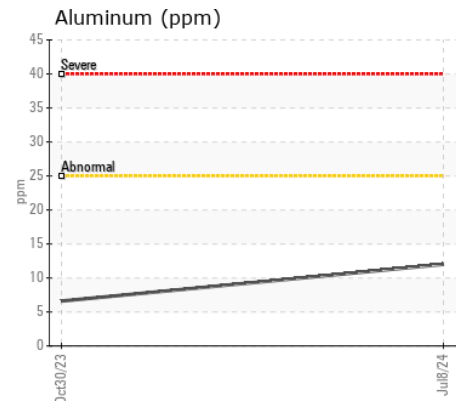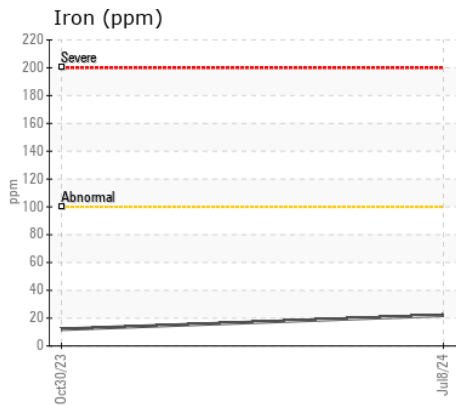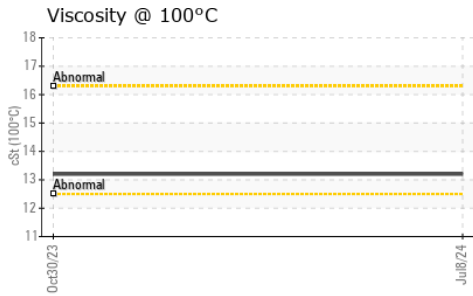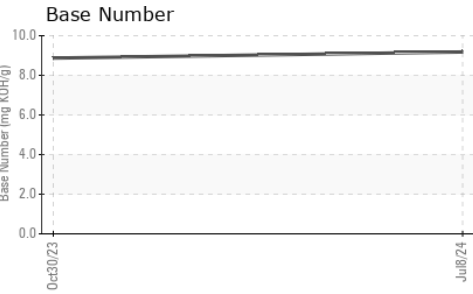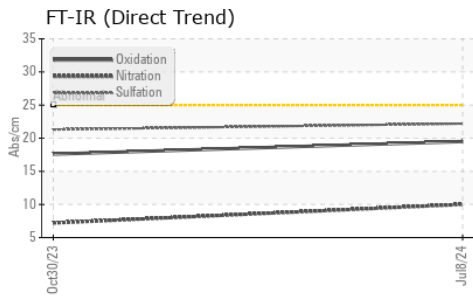

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0035620 **Received** : 12 Jul 2024
Lab Number : 06235129 **Tested** : 15 Jul 2024
Unique Number : 11123963 **Diagnosed** : 15 Jul 2024 - Wes Davis
Test Package : MOB 2

COMER CONSTRUCTION
 2100 SLADE LANE
 FOREST HILL, MD
 US 21050
 Contact: DONALD FOX
 dfox@comerconstruction.com
 T: (443)269-1379
 F: (410)638-0289

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)