



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
OTTAWA SPOTTER ST7746
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0005571	HPL0004009	---
Sample Date		Client Info		09 Jul 2024	26 Oct 2023	---
Machine Age	mls	Client Info		14875	92249	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	8	22	---
Chromium	ppm	ASTM D5185m	>20	<1	2	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	8	10	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	<1	1	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	10	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	11.8	15.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	37.4	38.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m	250	17	13	---
Barium	ppm	ASTM D5185m	10	0	21	---
Molybdenum	ppm	ASTM D5185m	100	569	575	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m	450	983	890	---
Calcium	ppm	ASTM D5185m	3000	2596	2594	---
Phosphorus	ppm	ASTM D5185m	1150	1108	961	---
Zinc	ppm	ASTM D5185m	1350	1332	1219	---
Sulfur	ppm	ASTM D5185m	4250	9719	10840	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	40.8	41.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	16.31	13.73	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.6	13.9	---

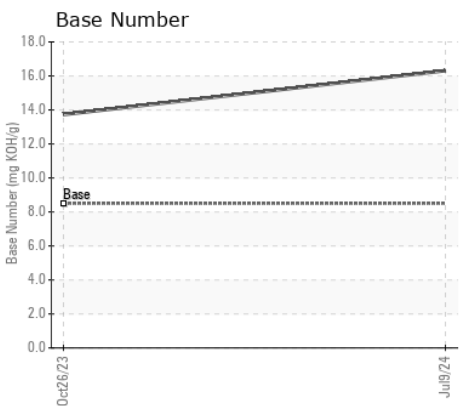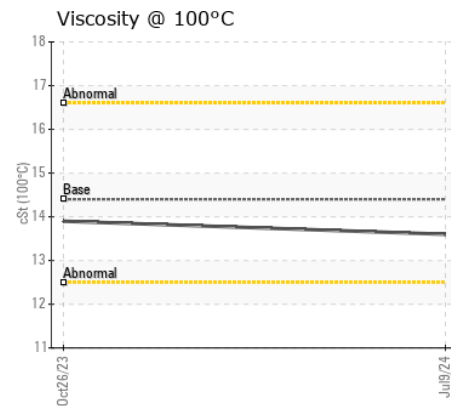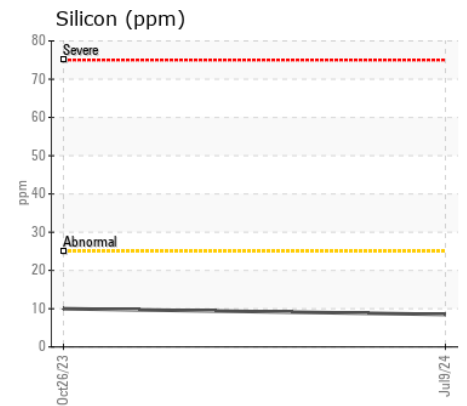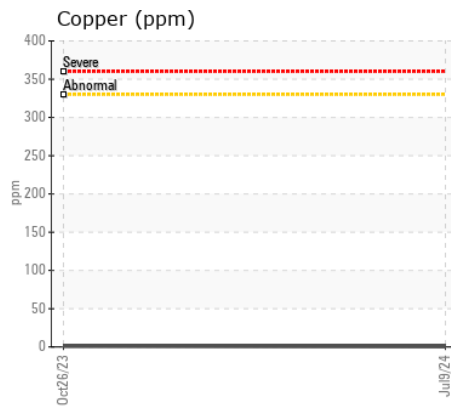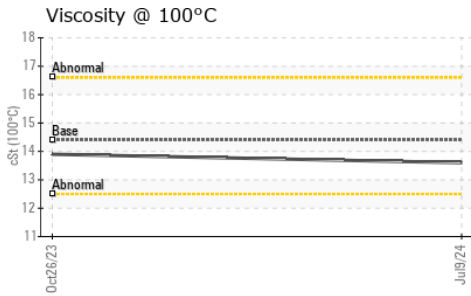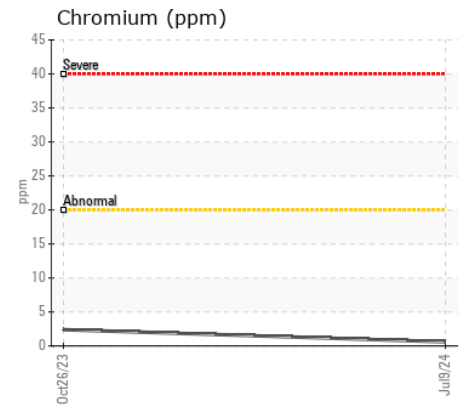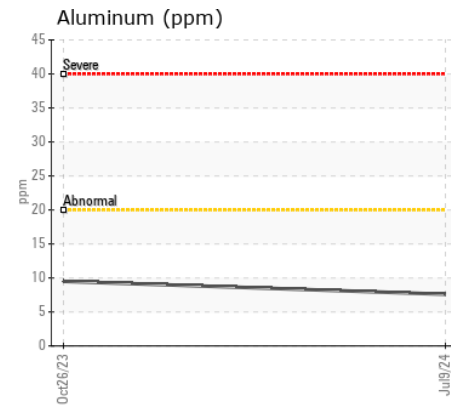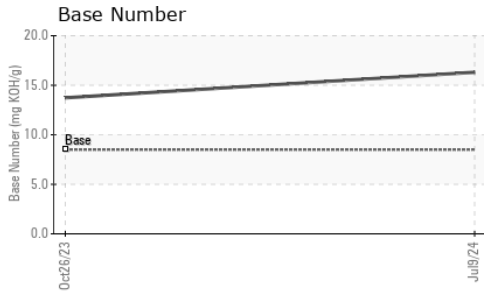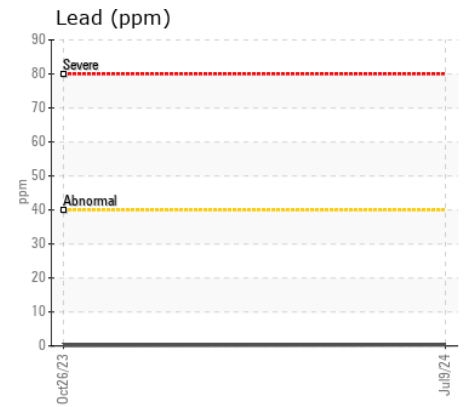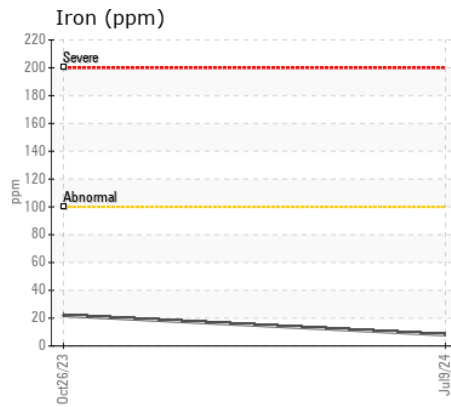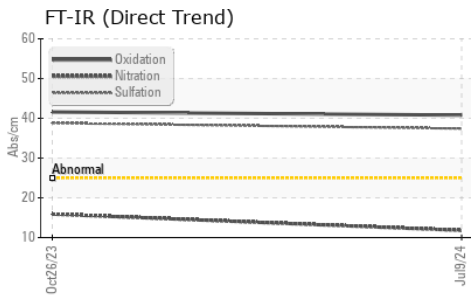

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0005571 **Received** : 12 Jul 2024
Lab Number : 06235136 **Tested** : 15 Jul 2024
Unique Number : 11123970 **Diagnosed** : 15 Jul 2024 - Sean Felton
Test Package : MOB 2

STEVENS ON CRANE
 410 STEVENSON DR
 BOLINGBROOK, IL
 US 60440

Contact: DAVE KOEHNE
 davidk@stevensoncrane.com

T: (630)972-9199

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)