



Machine Id
CHEVY P-5
 Component
Diesel Engine
 Fluid
5W30 DEXOS SYNTHETIC (--- QTS)

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LP0001951	---	---
Sample Date		Client Info		02 Jul 2024	---	---
Machine Age	mls	Client Info		251400	---	---
Oil Age	mls	Client Info		1600	---	---
Filter Age	mls	Client Info		1600	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	19	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>40	5	---	---
Copper	ppm	ASTM D5185m	>330	46	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION














Sodium and/or potassium levels are high. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Silicon	ppm	ASTM D5185m	>25	▲ 116	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	*ASTM D2982		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		● 132	---	---
Boron	ppm	ASTM D5185m		97	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		72	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		506	---	---
Calcium	ppm	ASTM D5185m		1127	---	---
Phosphorus	ppm	ASTM D5185m		691	---	---
Zinc	ppm	ASTM D5185m		740	---	---
Sulfur	ppm	ASTM D5185m		3114	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	10.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.78	---	---
Visc @ 100°C	cSt	ASTM D445		9.4	---	---

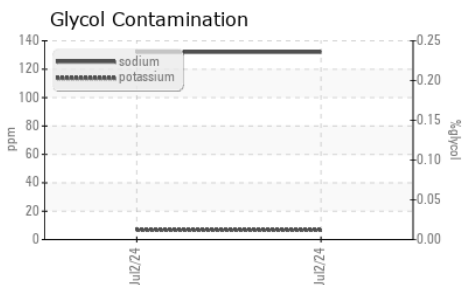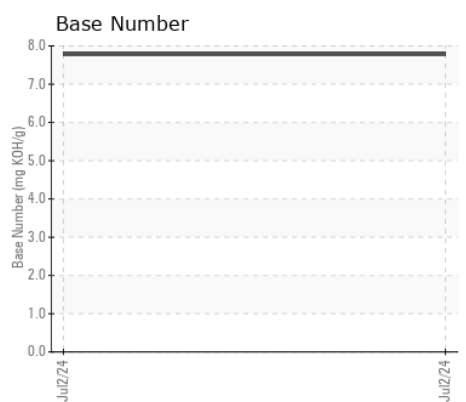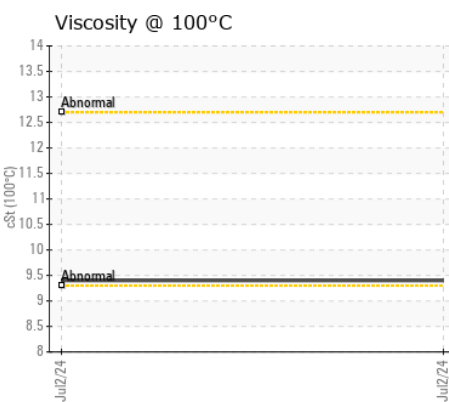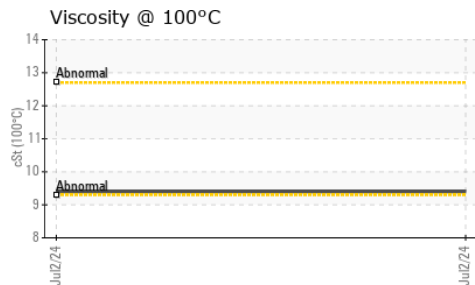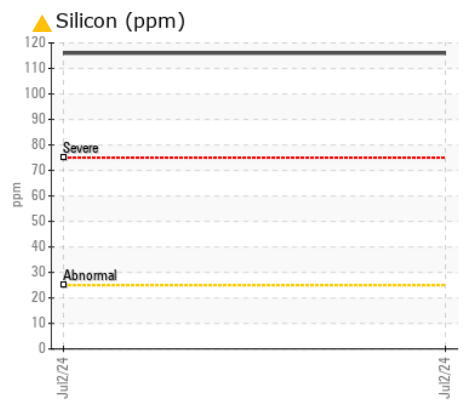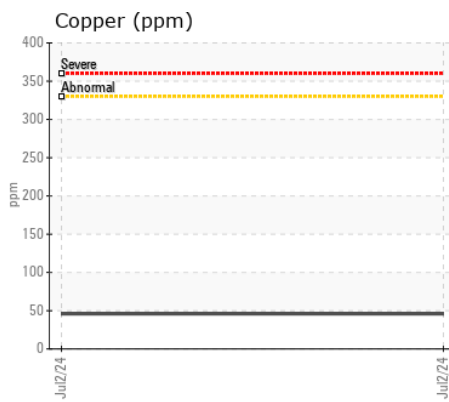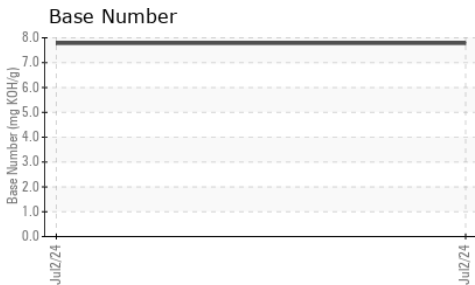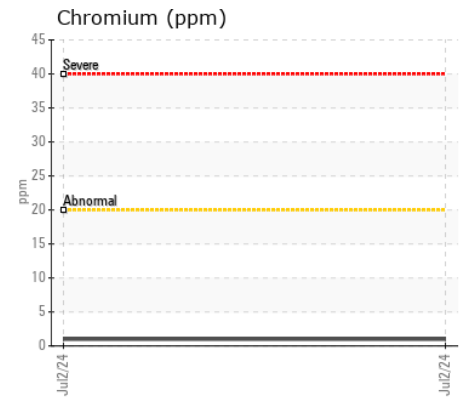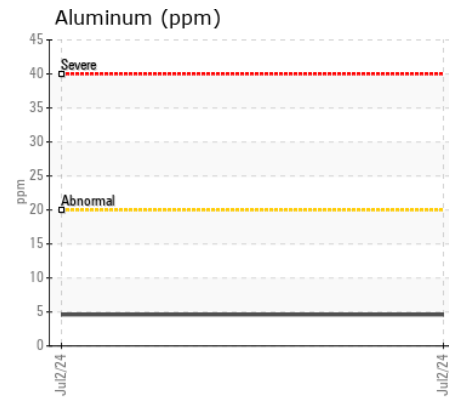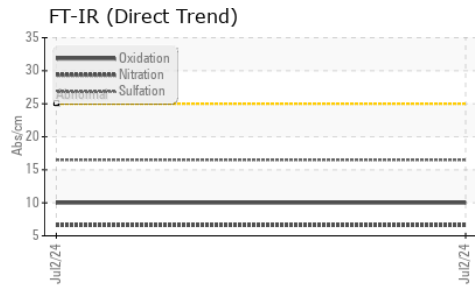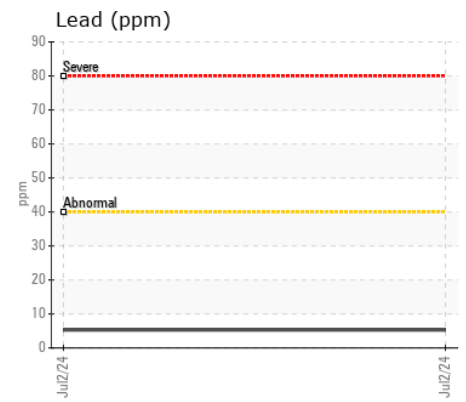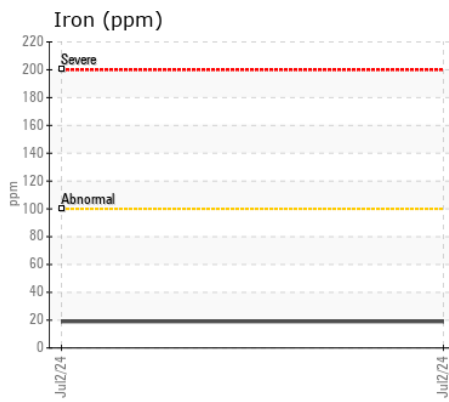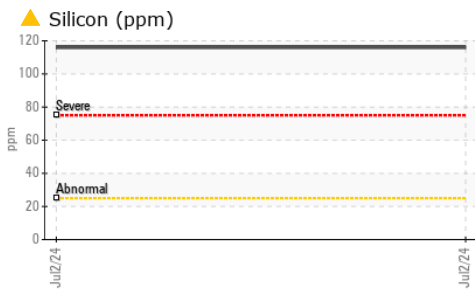

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LP0001951 **Received** : 12 Jul 2024
Lab Number : 06235146 **Tested** : 16 Jul 2024
Unique Number : 11123980 **Diagnosed** : 16 Jul 2024 - Sean Felton
Test Package : MOB 2 (Additional Tests: Glycol)

SELECT DEMO
 40 LOWELL RD
 SALEM, NH
 US 03079

Contact: STAN DOGIL
 SDOGIL@SELECTDEMOSERVICES.COM
 T: (603)401-0147
 F: (603)458-7389

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)