



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 748L 710997**

Component  
**Transmission (Manual)**

Fluid  
**JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0223543</b>	JR0204828	JR0162215
Sample Date		Client Info		<b>14 Jul 2024</b>	26 Feb 2024	25 Jul 2023
Machine Age	hrs	Client Info		<b>5631</b>	5000	4024
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>20</b>	12	13
Iron	ppm	ASTM D5185m	>200	<b>17</b>	15	36
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>7	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m	>45	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>225	<b>6</b>	3	7
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	2	8
Boron	ppm	ASTM D5185m		<b>0</b>	<1	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>94</b>	95	87
Calcium	ppm	ASTM D5185m		<b>3595</b>	3376	3100
Phosphorus	ppm	ASTM D5185m		<b>1035</b>	958	1016
Zinc	ppm	ASTM D5185m		<b>1233</b>	1238	1212
Sulfur	ppm	ASTM D5185m		<b>3156</b>	3393	3947
Visc @ 40°C	cSt	ASTM D445	59	<b>49.0</b>	49.9	47.2

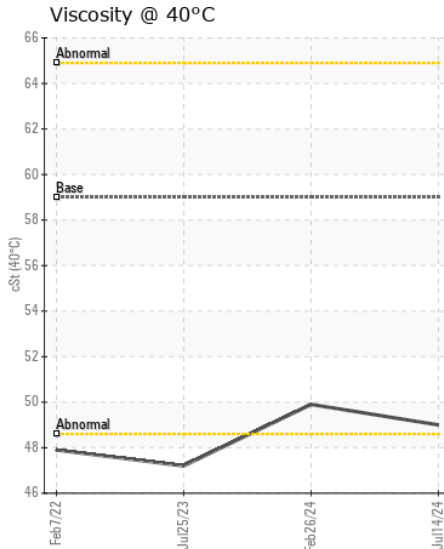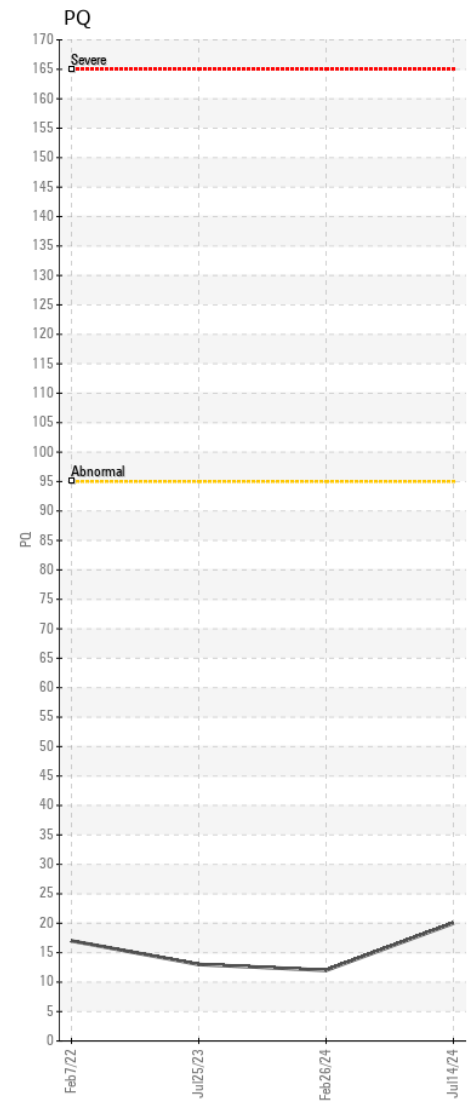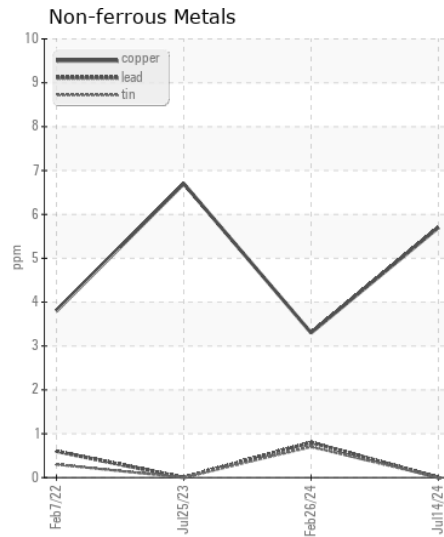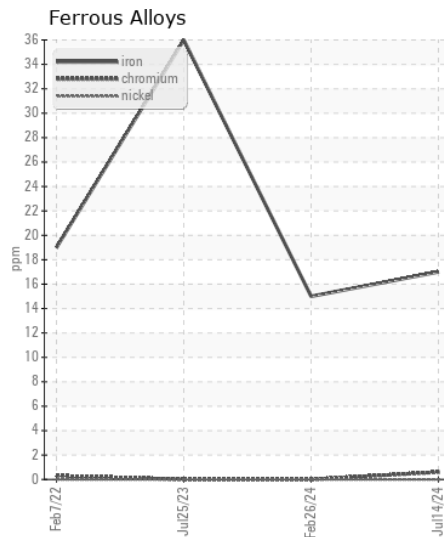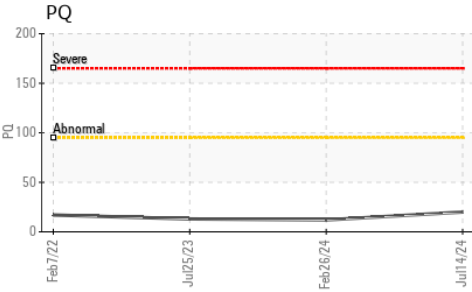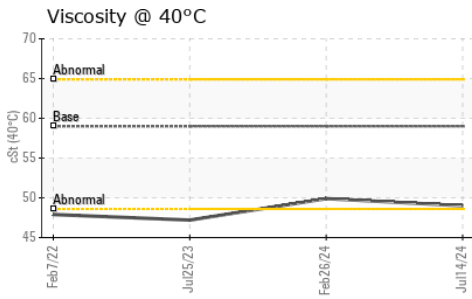

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0223543

**Lab Number** : 06235159

**Unique Number** : 11123993

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 12 Jul 2024

**Tested** : 15 Jul 2024

**Diagnosed** : 15 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENSBORO**

411 SOUTH REGIONAL ROAD

GREENSBORO, NC

US 27409

Contact: NICK GALLAHER

NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556