



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 2 - Beaver [RO#152217]**  
Machine Id  
**JOHN DEERE 700L 1T0700LXAPF435216**  
Component  
**Transmission**  
Fluid  
**JOHN DEERE HYDRAU (27 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0051140</b>	LEC0045735	---
Sample Date		Client Info		<b>09 Jul 2024</b>	28 Nov 2023	---
Machine Age	hrs	Client Info		<b>839</b>	485	---
Oil Age	hrs	Client Info		<b>839</b>	485	---
Filter Age	hrs	Client Info		<b>839</b>	485	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>100	<b>12</b>	11	---
Iron	ppm	ASTM D5185m	>61	<b>8</b>	4	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m		<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m	>9	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>100	<b>4</b>	3	---
Tin	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>21	<b>3</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>30	<b>0</b>	<1	---
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>5</b>	3	---
Calcium	ppm	ASTM D5185m	87	<b>182</b>	89	---
Phosphorus	ppm	ASTM D5185m	727	<b>661</b>	655	---
Zinc	ppm	ASTM D5185m	900	<b>865</b>	873	---
Sulfur	ppm	ASTM D5185m	1500	<b>1522</b>	1677	---
Visc @ 40°C	cSt	ASTM D445	65	<b>55.6</b>	56.8	---

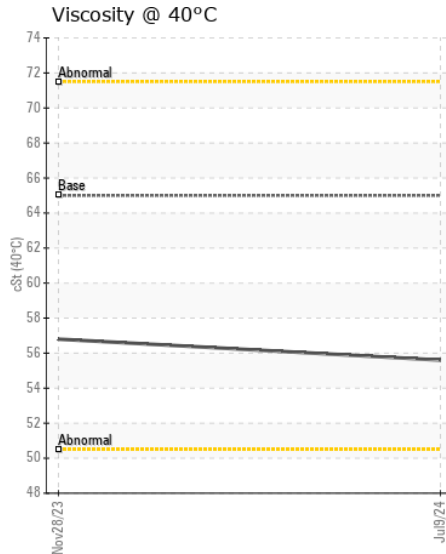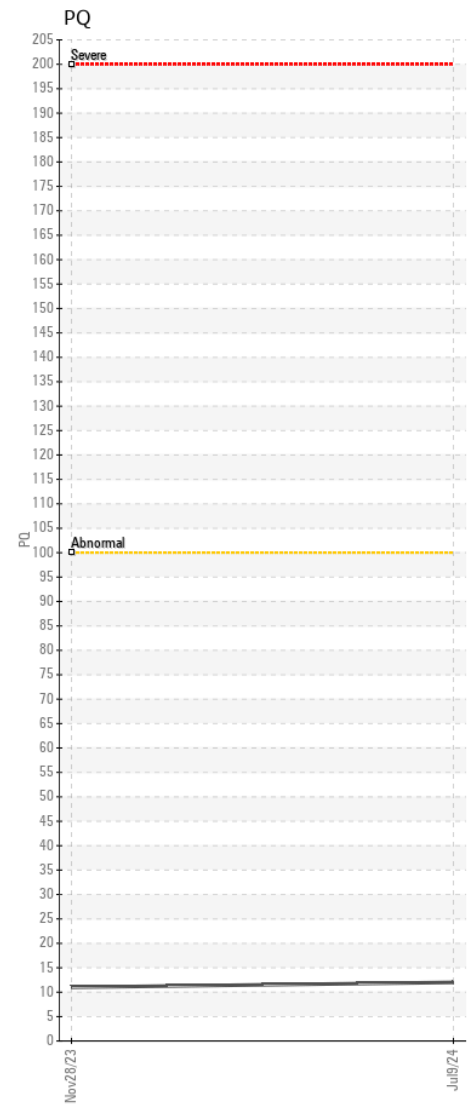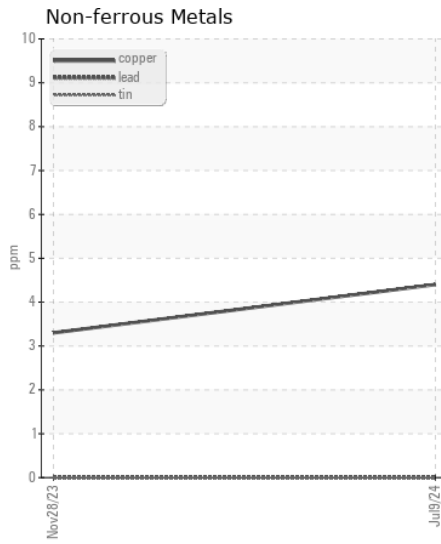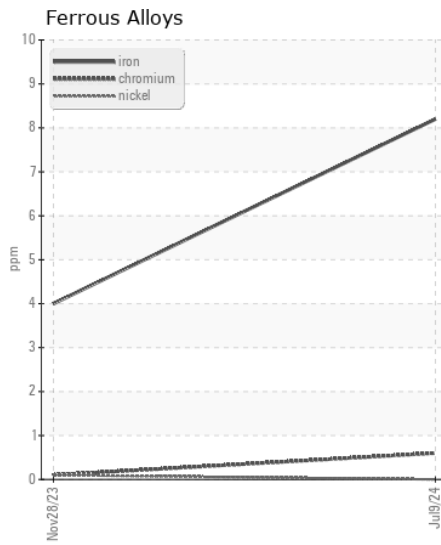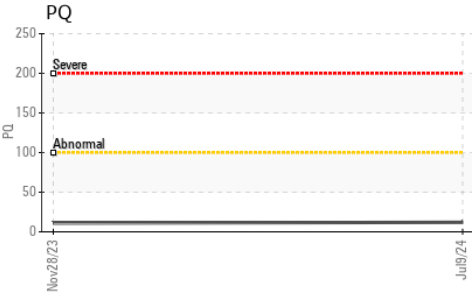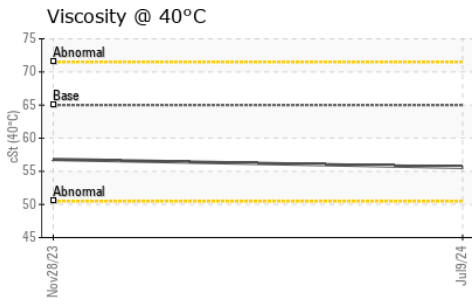

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0051140 **Received** : 12 Jul 2024  
**Lab Number** : 06235165 **Tested** : 15 Jul 2024  
**Unique Number** : 11123999 **Diagnosed** : 15 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570