



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[16W16629]

Machine Id

JOHN DEERE 748L-II 1DW748LBKPL718176

Component

Front Differential

Fluid

JOHN DEERE HY-GARD HYD/TRANS (33 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W16629)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217354	---	---
Sample Date		Client Info		11 Jul 2024	---	---
Machine Age	hrs	Client Info		524	---	---
Oil Age	hrs	Client Info		524	---	---
Filter Age	hrs	Client Info		524	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		29	---	---
Iron	ppm	ASTM D5185m	>500	73	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	2	---	---
Copper	ppm	ASTM D5185m	>100	23	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>75	4	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m	6	<1	---	---
Barium	ppm	ASTM D5185m	0	4	---	---
Molybdenum	ppm	ASTM D5185m	0	<1	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	145	97	---	---
Calcium	ppm	ASTM D5185m	3570	3813	---	---
Phosphorus	ppm	ASTM D5185m	1290	1070	---	---
Zinc	ppm	ASTM D5185m	1640	1259	---	---
Sulfur	ppm	ASTM D5185m		3565	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	53.6	---	---

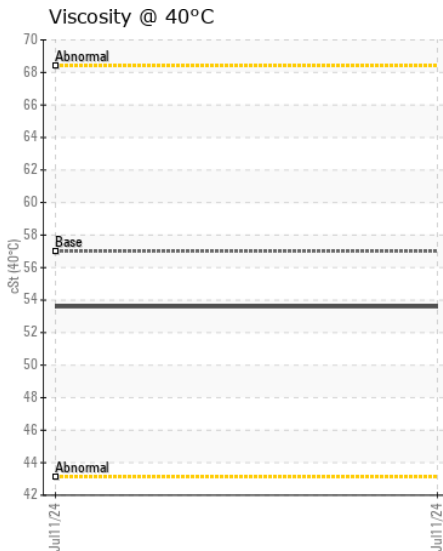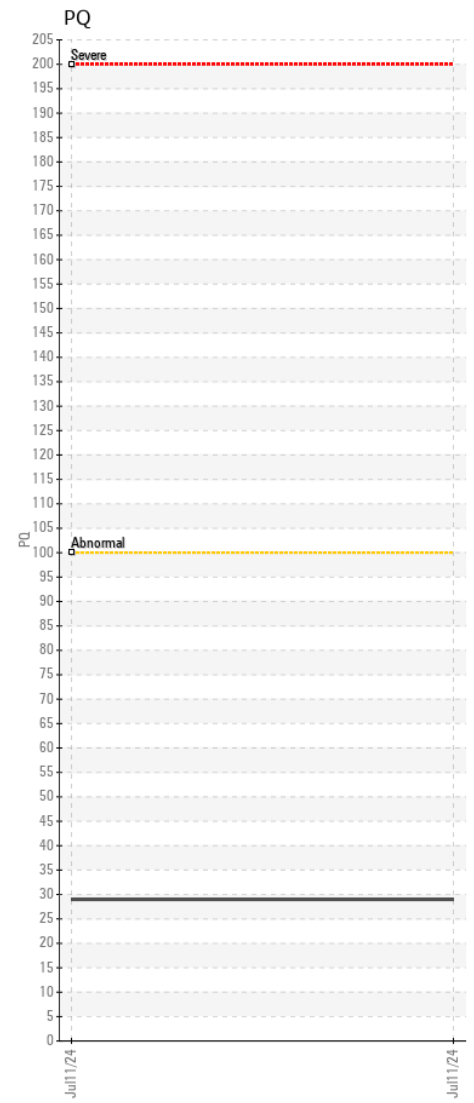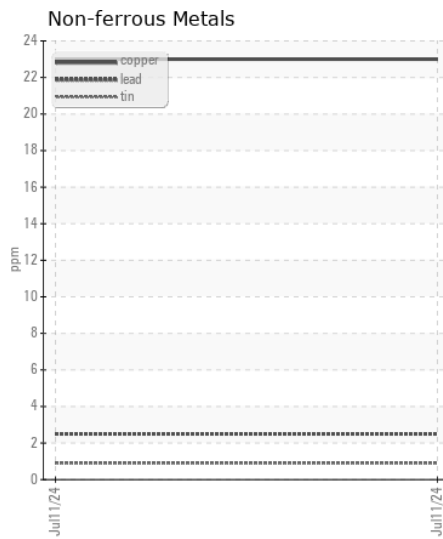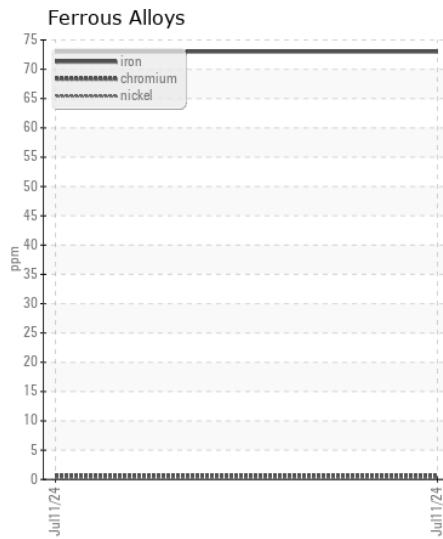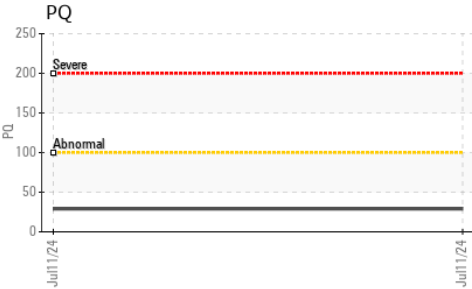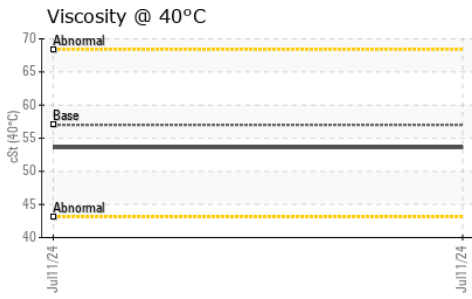

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0217354

Lab Number : 06235178

Unique Number : 11124012

Test Package : CONST (Additional Tests: PQ)

Received : 12 Jul 2024

Tested : 15 Jul 2024

Diagnosed : 15 Jul 2024 - Sean Felton

JRE - CASTLE HAYNE

113 CROWATAN ROAD

CASTLE HAYNE, NC

US 28429-5819

Contact: Jacob Harvey

jacob.harvey@jamesriverequipment.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)