



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area
Store 1 - Cowen [152475]
Machine Id
JOHN DEERE 672G 1DW672GXJPF718362
Component
Right 6WD Hub
Fluid
JOHN DEERE HY-GARD HYD/TRANS (2 GAL)

RECOMMENDATION

We advise that you check for the source of water entry. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.








CONTAMINATION

There is a moderate concentration of water present in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0047556	---	---
Sample Date		Client Info		09 Jul 2024	---	---
Machine Age	hrs	Client Info		498	---	---
Oil Age	hrs	Client Info		498	---	---
Filter Age	hrs	Client Info		498	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---
PQ		ASTM D8184		64	---	---
Iron	ppm	ASTM D5185m	>200	36	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		2	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		2	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m		6	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water	%	ASTM D6304	>0.2	▲ 0.345	---	---
ppm Water	ppm	ASTM D6304	>2000	▲ 3450	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	▲ 0.2%	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	6	0	---	---
Barium	ppm	ASTM D5185m	0	1	---	---
Molybdenum	ppm	ASTM D5185m	0	1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	145	103	---	---
Calcium	ppm	ASTM D5185m	3570	3747	---	---
Phosphorus	ppm	ASTM D5185m	1290	1106	---	---
Zinc	ppm	ASTM D5185m	1640	1327	---	---
Sulfur	ppm	ASTM D5185m		3557	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	56.8	---	---

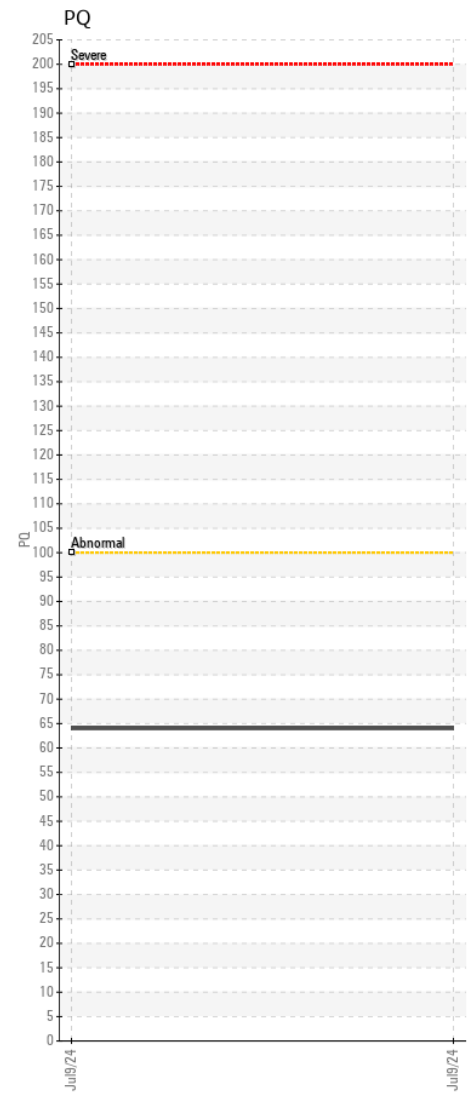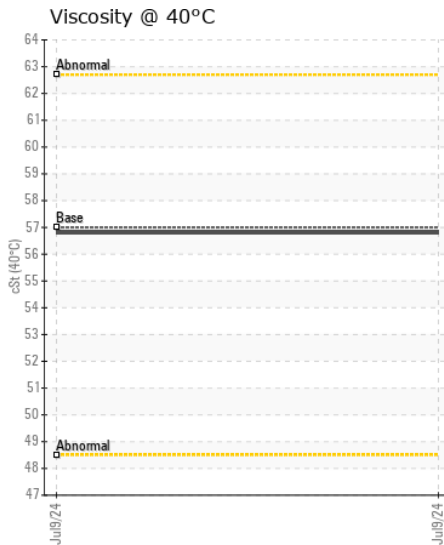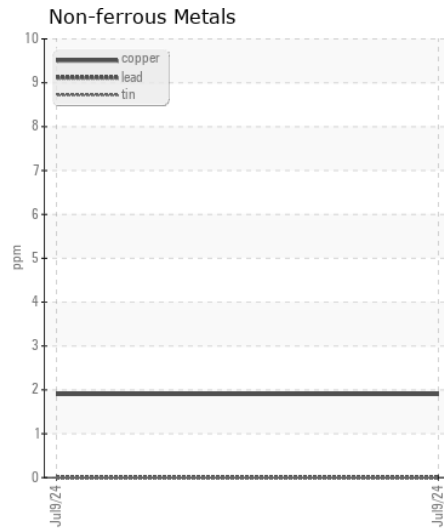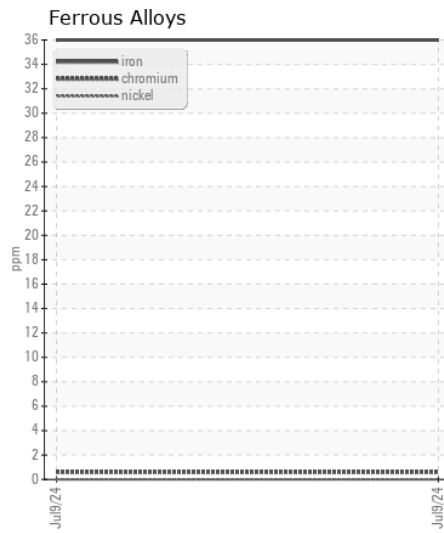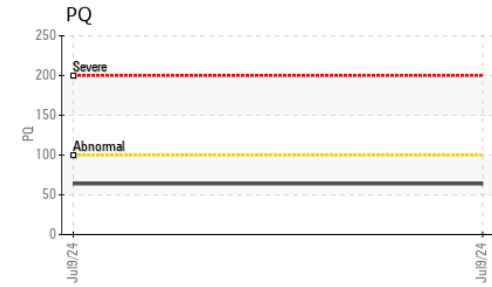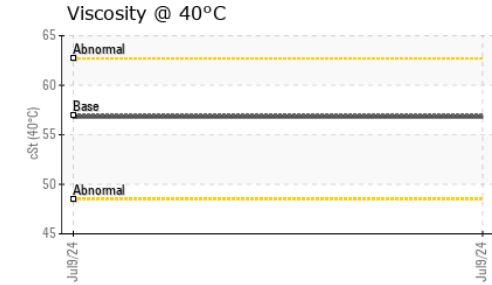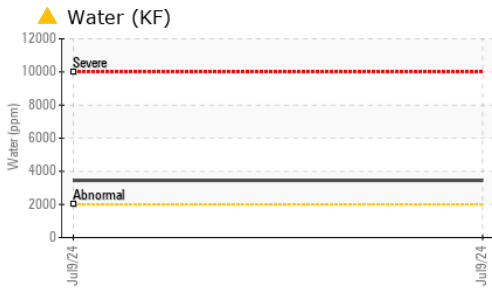

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0047556 **Received** : 12 Jul 2024
Lab Number : 06235211 **Tested** : 15 Jul 2024
Unique Number : 11124045 **Diagnosed** : 15 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: KF, PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (740)373-5570