



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**[HERC RENTALS]**  
 Machine Id  
**VOLVO L110H 632557**  
 Component  
**Front Axle**  
 Fluid  
**VOLVO WET BRAKE TRANSAXLE OIL (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP444381	---	---
Sample Date		Client Info		09 Jul 2024	---	---
Machine Age	hrs	Client Info		2420	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	273	---	---
Chromium	ppm	ASTM D5185m	>20	6	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		1	---	---
Aluminum	ppm	ASTM D5185m	>30	3	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>120	3	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	19	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	100	136	---	---
Barium	ppm	ASTM D5185m	0	<1	---	---
Molybdenum	ppm	ASTM D5185m	0	13	---	---
Manganese	ppm	ASTM D5185m		12	---	---
Magnesium	ppm	ASTM D5185m	0	14	---	---
Calcium	ppm	ASTM D5185m	3800	4026	---	---
Phosphorus	ppm	ASTM D5185m	1200	1283	---	---
Zinc	ppm	ASTM D5185m	1500	1579	---	---
Sulfur	ppm	ASTM D5185m	6500	4933	---	---
Visc @ 40°C	cSt	ASTM D445	52.0	40.3	---	---

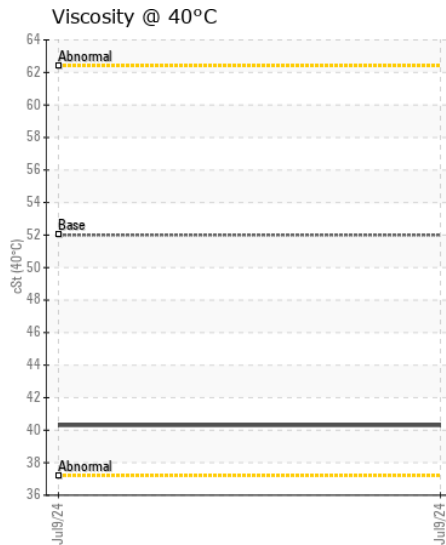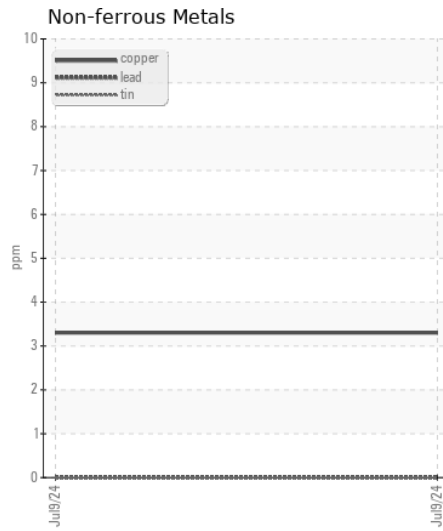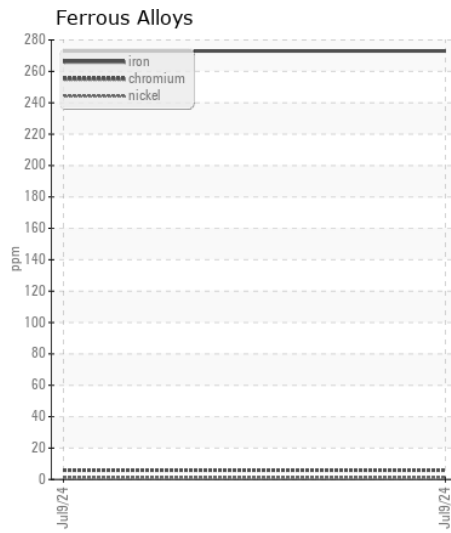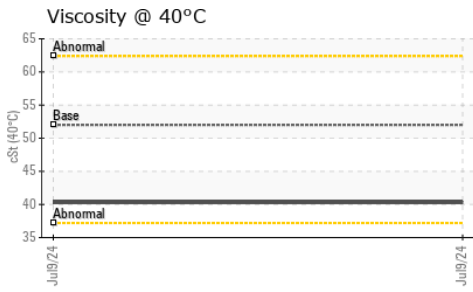

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP444381  
**Lab Number** : 06235231  
**Unique Number** : 11124065  
**Test Package** : CONST

**Received** : 12 Jul 2024  
**Tested** : 15 Jul 2024  
**Diagnosed** : 15 Jul 2024 - Sean Felton

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619

Contact: KENNY HANEY  
 khaney@flaglerce.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (813)630-0077  
 F: (813)630-2233