



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
420097 - SW4006
Component
2 Differential
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 2nd Axle / Tag)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0105472	GFL0123521	GFL0089413
Sample Date		Client Info		03 Jul 2024	19 Jun 2024	21 Jul 2023
Machine Age	mls	Client Info		233426	231528	194100
Oil Age	mls	Client Info		233426	231528	0
Filter Age	mls	Client Info		233426	0	0
Oil Changed		Client Info		Not Changed	Changed	N/A
Filter Changed		Client Info		Not Changed	Changed	N/A
Sample Status				ATTENTION	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	113	264	127
Chromium	ppm	ASTM D5185m	>8	<1	1	<1
Nickel	ppm	ASTM D5185m	>20	6	18	12
Titanium	ppm	ASTM D5185m	>4	<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>30	3	5	4
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	0
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>230	44	115	149
Potassium	ppm	ASTM D5185m	>20	2	2	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Sodium	ppm	ASTM D5185m	>170	0	2	2
Boron	ppm	ASTM D5185m	400	33	70	116
Barium	ppm	ASTM D5185m	200	<1	0	0
Molybdenum	ppm	ASTM D5185m	12	<1	0	0
Manganese	ppm	ASTM D5185m		1	3	3
Magnesium	ppm	ASTM D5185m	12	1	3	0
Calcium	ppm	ASTM D5185m	150	6	2	6
Phosphorus	ppm	ASTM D5185m	1650	623	713	859
Zinc	ppm	ASTM D5185m	125	11	11	4
Sulfur	ppm	ASTM D5185m	22500	15363	14523	19809
Visc @ 40°C	cSt	ASTM D445	143	53.5	54.6	134

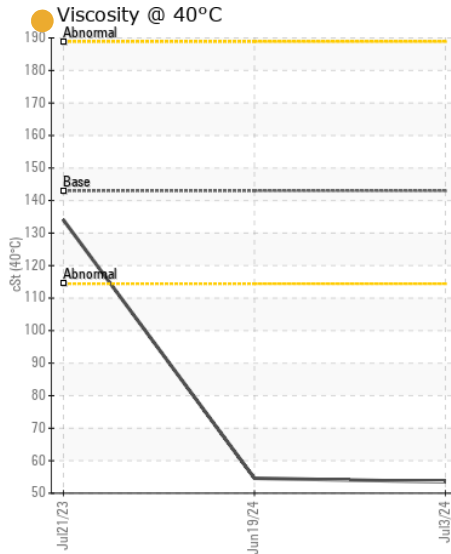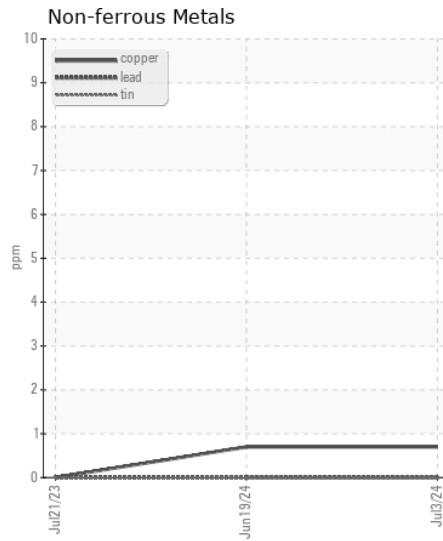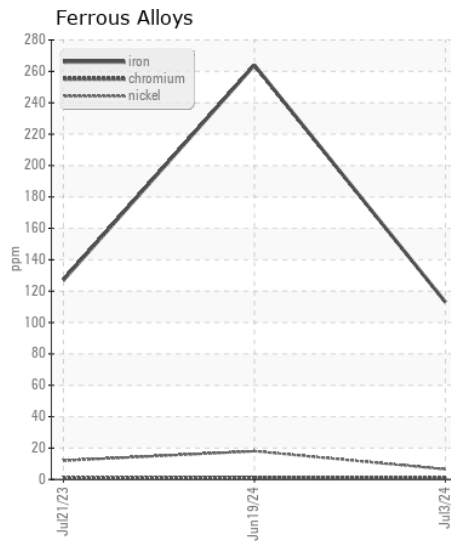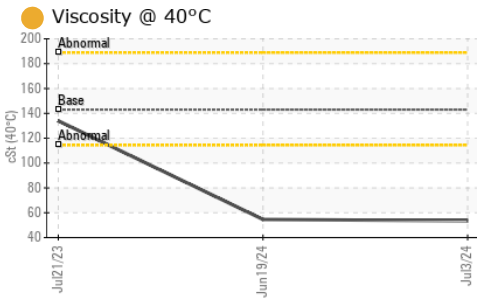

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0105472
Lab Number : 06235285
Unique Number : 11124119
Test Package : FLEET

GFL Environmental - 983 - Sugar Land Hauling
 16011 West Belfort Street
 Sugar Land, TX
 US 77498
 Contact: Adrian Martinez
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: