



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Machine Id
HOLDING TANK
Component
Transmission
Fluid
TRANS FLUID (--- GAL)

RECOMMENDATION

We advise that you check for the source of water entry. We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a moderate amount of visible silt present in the sample. There is a high concentration of water present in the fluid.

FLUID CONDITION

The fluid is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0035467	---	---
Sample Date		Client Info		09 Jul 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---
Iron	ppm	ASTM D5185m	>200	1	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>50	3	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>200	1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>50	2	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water	%	ASTM D6304	>0.1	▲ 2.53	---	---
ppm Water	ppm	ASTM D6304	>1000	▲ 25300	---	---
Silt	scalar	*Visual	NONE	▲ MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	HAZY	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	▲ 0.2%	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		128	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		29	---	---
Phosphorus	ppm	ASTM D5185m		308	---	---
Zinc	ppm	ASTM D5185m		72	---	---
Sulfur	ppm	ASTM D5185m		361	---	---
Visc @ 40°C	cSt	ASTM D445		▲ 39.0	---	---

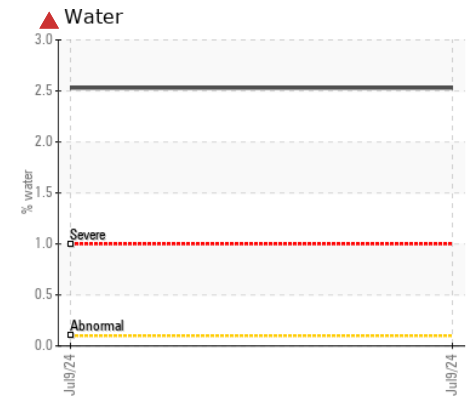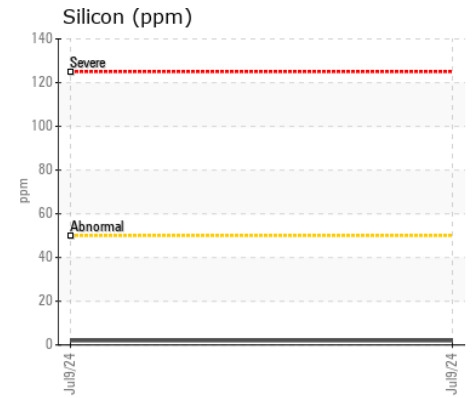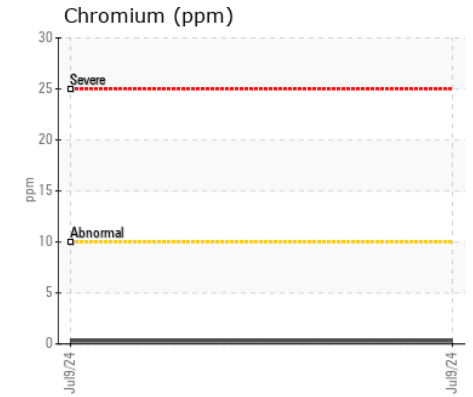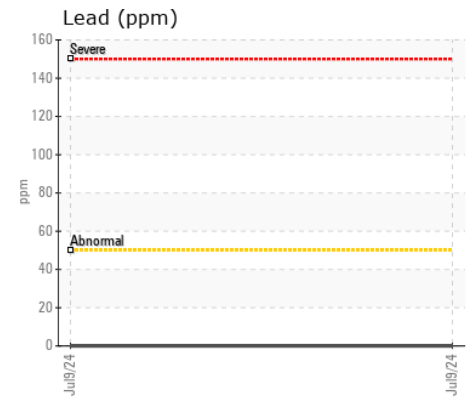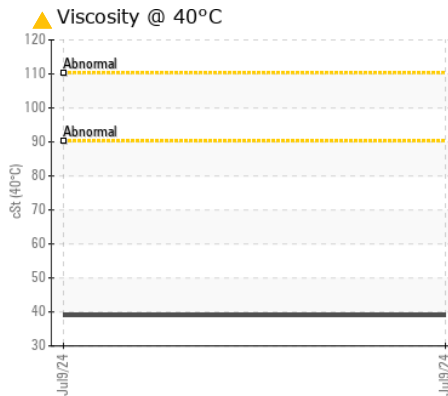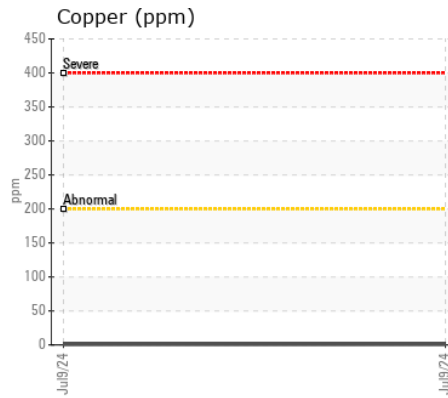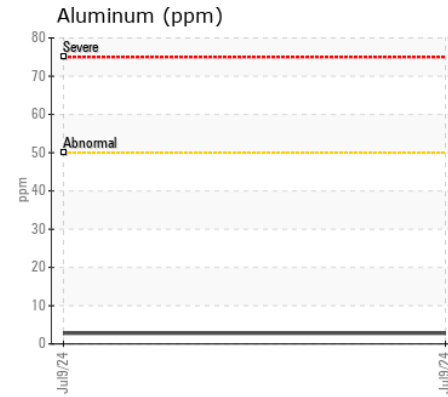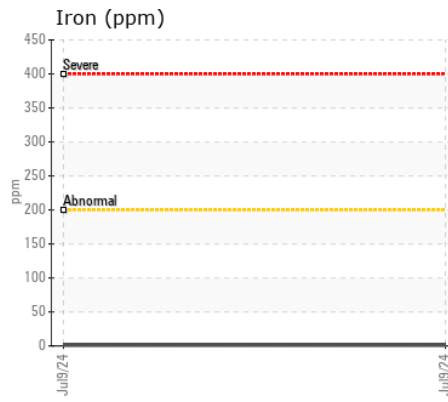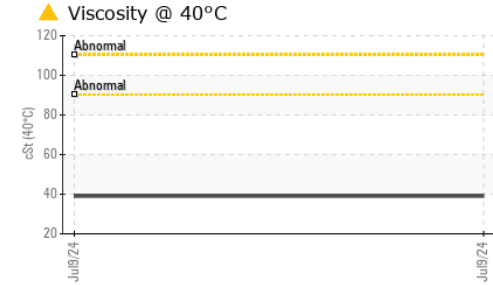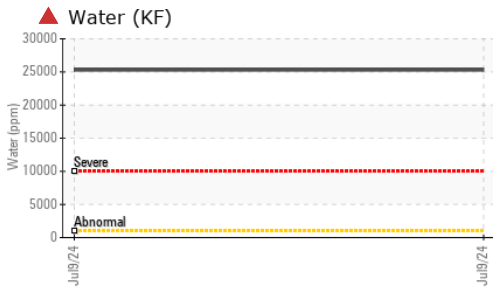

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0035467 **Received** : 12 Jul 2024
Lab Number : 06235299 **Tested** : 15 Jul 2024
Unique Number : 11124133 **Diagnosed** : 15 Jul 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: KF)

KELLER BUS
 4472 GALLANT GREEN RD
 WALDORF, MD
 US 20601
 Contact: Paul Or Larry
 Lking@kellerbus.com
 T: (301)645-5734
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)