



VOLVO

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
VOLVO A45G 353323
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | VCP449501 | VCP455500 | VCP437754 |
| Sample Date | | Client Info | | 10 Jul 2024 | 03 May 2024 | 12 Apr 2024 |
| Machine Age | hrs | Client Info | | 2756 | 2406 | 2288 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Not Changd | Changed |
| Filter Changed | | Client Info | | Changed | Not Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | ATTENTION |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 5 | 3 | 9 |
| Chromium | ppm | ASTM D5185m | >20 | 0 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | 0 | <1 | 1 |
| Titanium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >25 | 1 | 2 | 2 |
| Lead | ppm | ASTM D5185m | >40 | 0 | 0 | 6 |
| Copper | ppm | ASTM D5185m | >330 | <1 | <1 | 7 |
| Tin | ppm | ASTM D5185m | >15 | 0 | <1 | 1 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION












There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 4 | 4 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 1 | 2 |
| Fuel | | WC Method | >6.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.2 | 0.2 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.7 | 6.7 | 6.4 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.7 | 21.2 | 21.5 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 3 | 2 | 2 |
| Boron | ppm | ASTM D5185m | 2.5 | 43 | 66 | 55 |
| Barium | ppm | ASTM D5185m | 0.0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0.7 | 39 | 39 | 49 |
| Manganese | ppm | ASTM D5185m | 0.0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 256 | 517 | 490 | 489 |
| Calcium | ppm | ASTM D5185m | 2057 | 1716 | 1579 | 1662 |
| Phosphorus | ppm | ASTM D5185m | 935 | 941 | 932 | 981 |
| Zinc | ppm | ASTM D5185m | 1223 | 1063 | 1059 | 1112 |
| Sulfur | ppm | ASTM D5185m | 4079 | 3261 | 3024 | 3315 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 19.3 | 18.8 | 19.2 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 10 | 10.1 | 9.4 | 10.2 |
| Visc @ 100°C | cSt | ASTM D445 | 15.0 | 12.6 | 12.8 | 12.3 |

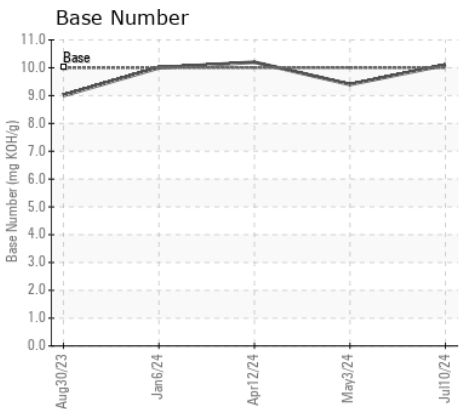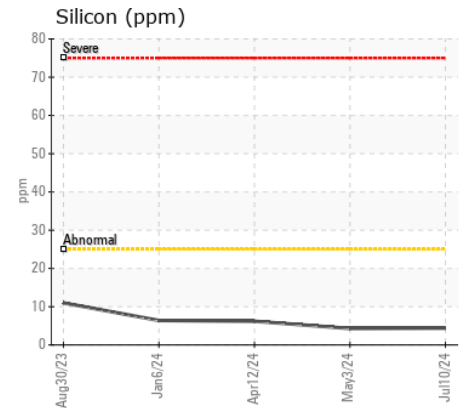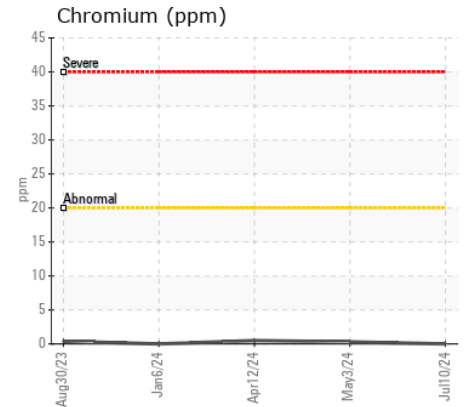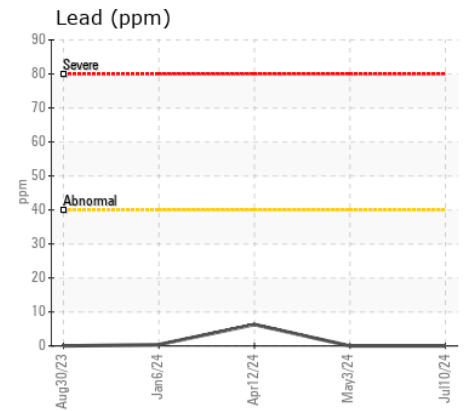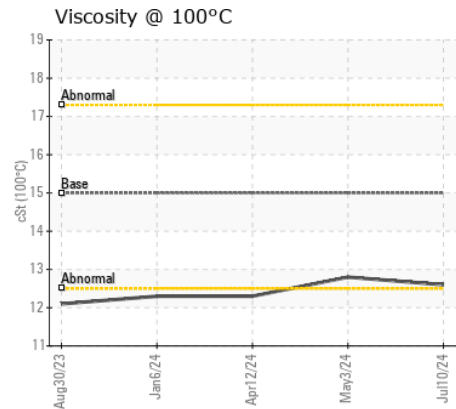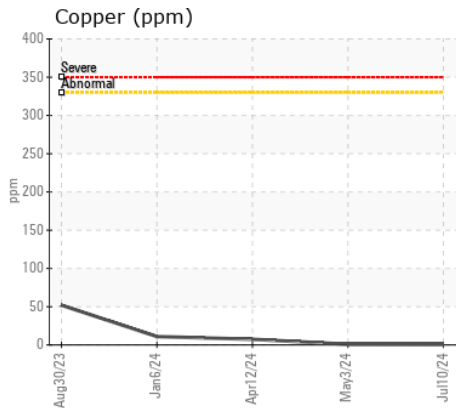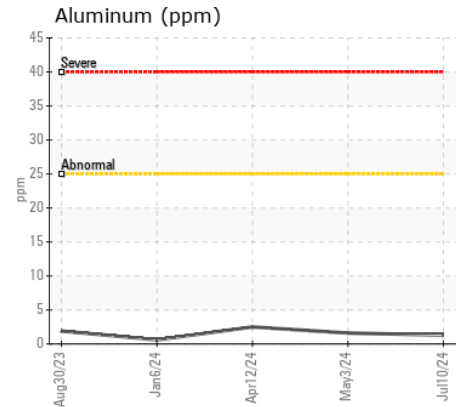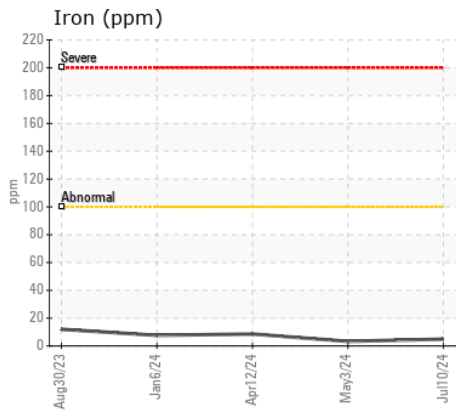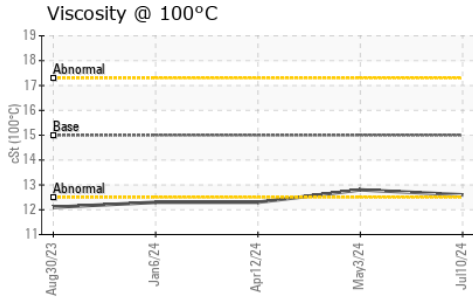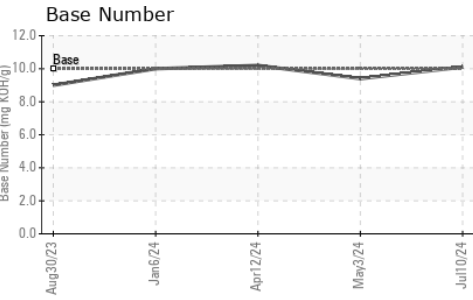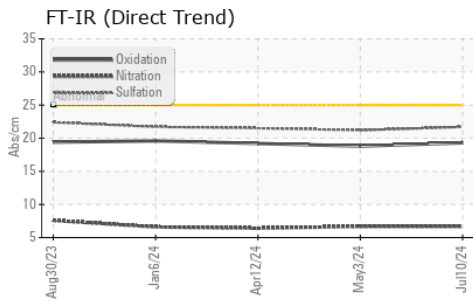

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP449501

Lab Number : 06235444

Unique Number : 11124278

Test Package : MOB 1 (Additional Tests: TBN)

Received : 15 Jul 2024

Tested : 15 Jul 2024

Diagnosed : 15 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ALTA EQUIPMENT COMPANY

5151 DR MARTIN LUTHER KING BLVD

FORT MYERS, FL

US 33905

Contact: TODD LARK

tlark@altaequipfl.com

T:

F: (239)481-3302