



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350P 1FF350PAVPF000781

Component
Diesel Engine

Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220311	---	---
Sample Date		Client Info		11 Jul 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

The copper level is abnormal. Valve wear is indicated.

Iron	ppm	ASTM D5185m	>51	43	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	▲ 11	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	2	---	---
Aluminum	ppm	ASTM D5185m	>31	4	---	---
Lead	ppm	ASTM D5185m	>26	<1	---	---
Copper	ppm	ASTM D5185m	>26	▲ 67	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	10	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel	%	ASTM D3524	>2.1	0.1	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	7	---	---
Boron	ppm	ASTM D5185m		206	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		211	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		745	---	---
Calcium	ppm	ASTM D5185m		1446	---	---
Phosphorus	ppm	ASTM D5185m		892	---	---
Zinc	ppm	ASTM D5185m		1008	---	---
Sulfur	ppm	ASTM D5185m		3216	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.4	---	---
Visc @ 100°C	cSt	ASTM D445		10.9	---	---


▲ Non-ferrous Metals

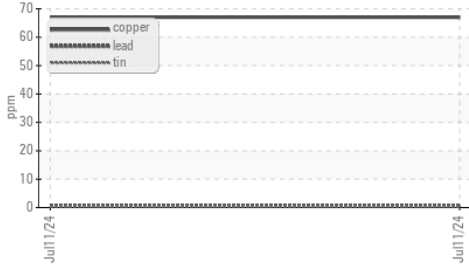


▲ Ferrous Alloys

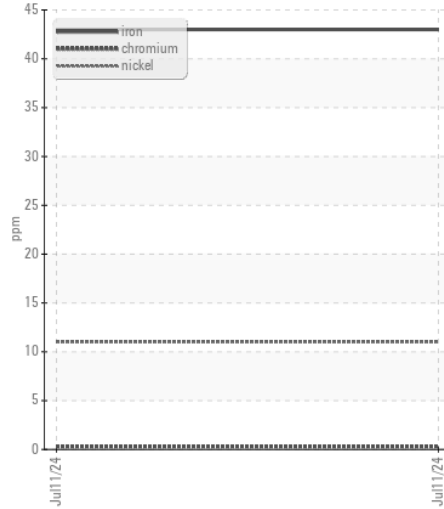


▲ Ferrous Alloys

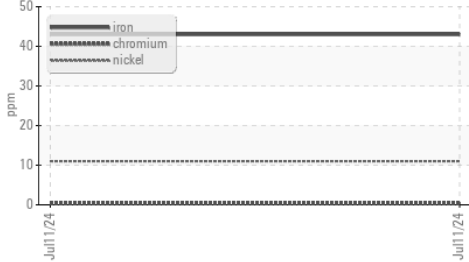


▲ Non-ferrous Metals

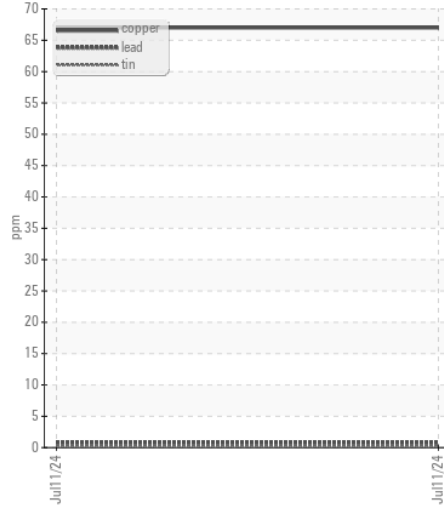


Fuel Dilution

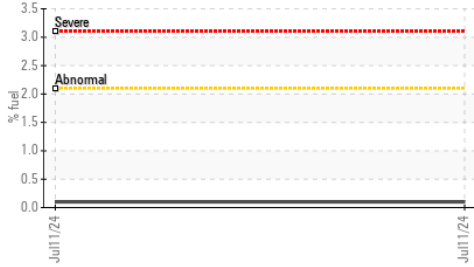


FT-IR (Direct Trend)

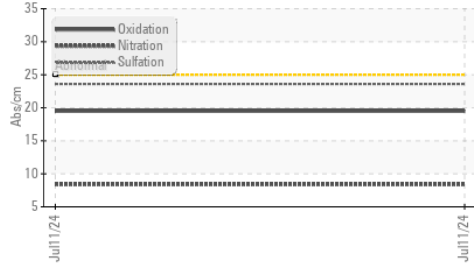


Viscosity @ 100°C

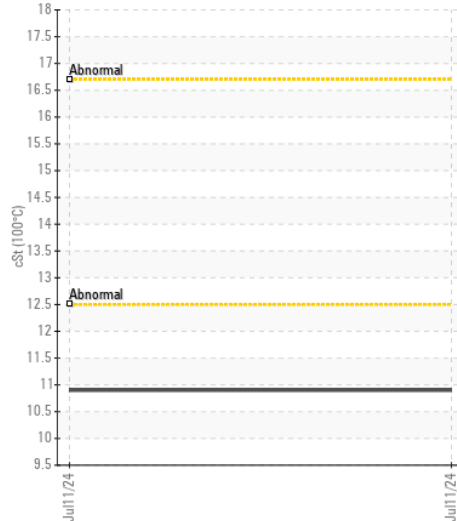

Base Number

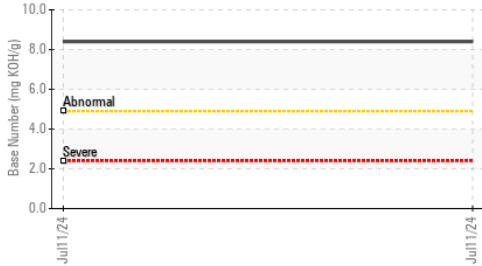

Base Number

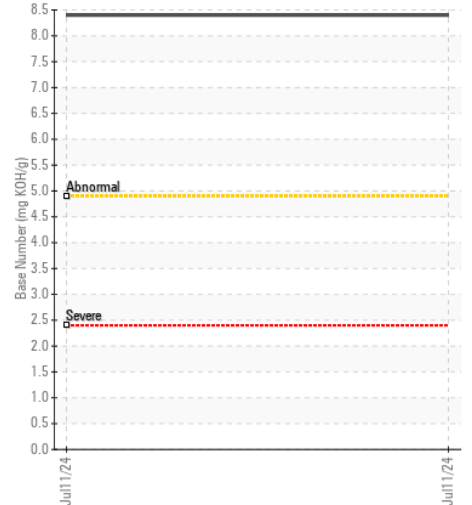

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220311 **Received** : 15 Jul 2024
Lab Number : 06235681 **Tested** : 17 Jul 2024
Unique Number : 11124515 **Diagnosed** : 17 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)