



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area

Mobile Fleet

Machine Id

8050 8050

Component

Rear Differential

Fluid

MOBIL DELVAC 1 SYNTHETIC GEAR SAE 75W90 (5 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0956010	WC0794011	---
Sample Date		Client Info		12 Jul 2024	20 Mar 2023	---
Machine Age	hrs	Client Info		3103	10	---
Oil Age	hrs	Client Info		3103	10	---
Filter Age	hrs	Client Info		3103	10	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				ATTENTION	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	198	26	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	3	<1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>100	3	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is a moderate amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>75	25	8	---
Potassium	ppm	ASTM D5185m	>20	4	2	---
Water		WC Method	>.2	NEG	NEG	---
Particles >4µm		ASTM D7647	>20000	7429	8604	---
Particles >6µm		ASTM D7647	>5000	4047	4687	---
Particles >14µm		ASTM D7647	>640	689	798	---
Particles >21µm		ASTM D7647	>160	232	269	---
Particles >38µm		ASTM D7647	>40	36	41	---
Particles >71µm		ASTM D7647	>10	4	4	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/19/17	20/19/17	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	5	---
Boron	ppm	ASTM D5185m		274	293	---
Barium	ppm	ASTM D5185m		2	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		9	5	---
Magnesium	ppm	ASTM D5185m		5	4	---
Calcium	ppm	ASTM D5185m		3	11	---
Phosphorus	ppm	ASTM D5185m		1273	1317	---
Zinc	ppm	ASTM D5185m		15	18	---
Sulfur	ppm	ASTM D5185m		23847	26104	---
Visc @ 40°C	cSt	ASTM D445	120	93.5	98.6	---

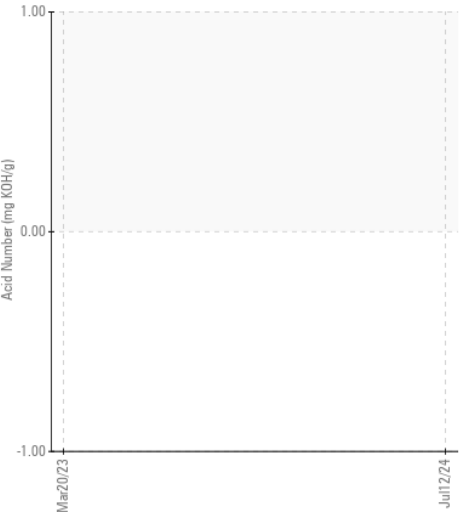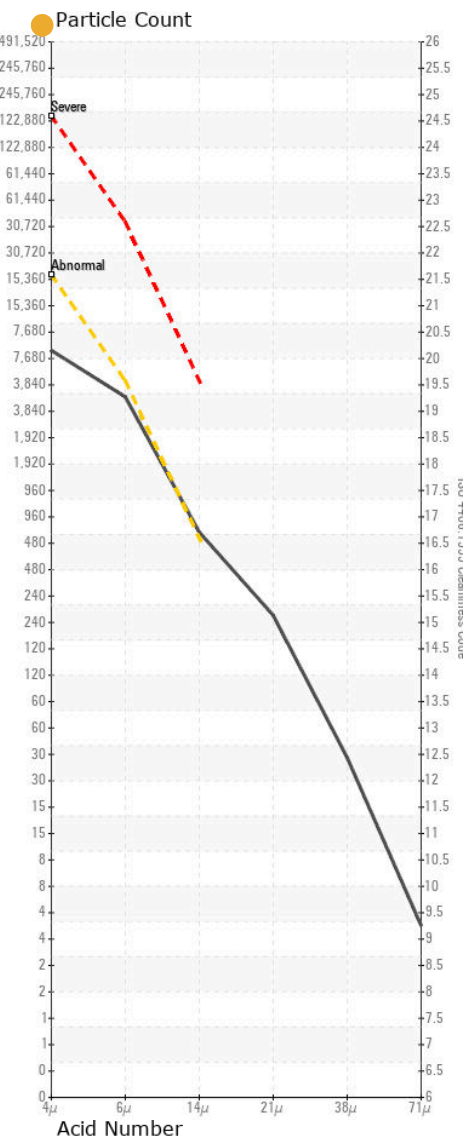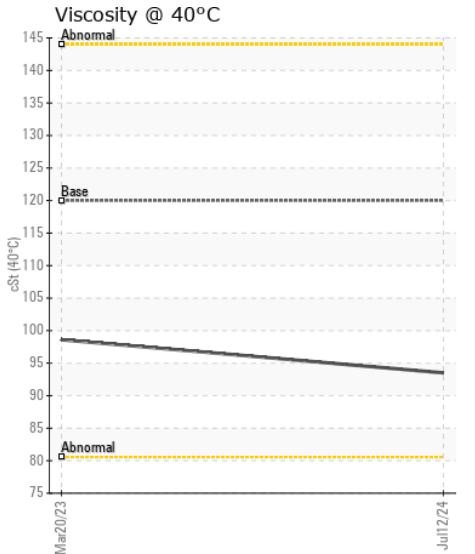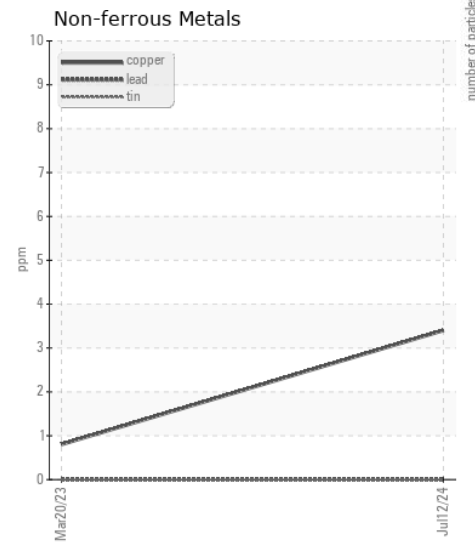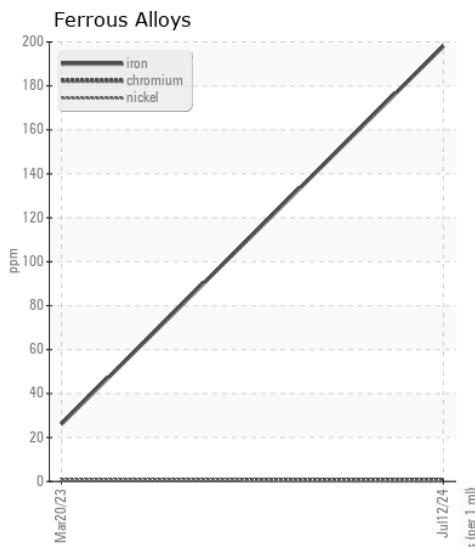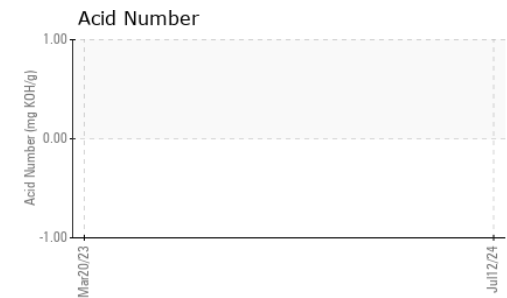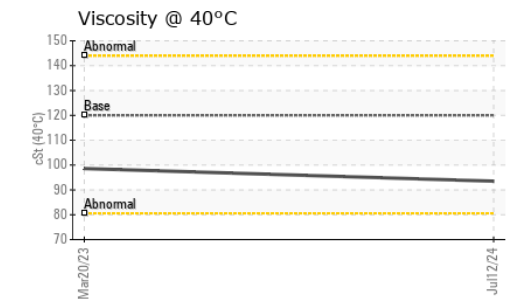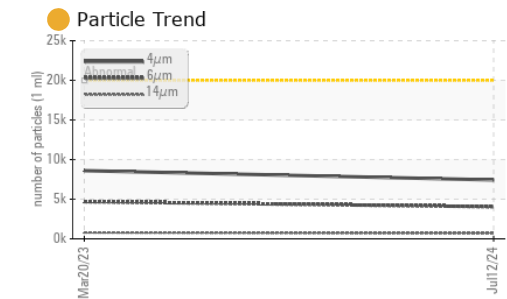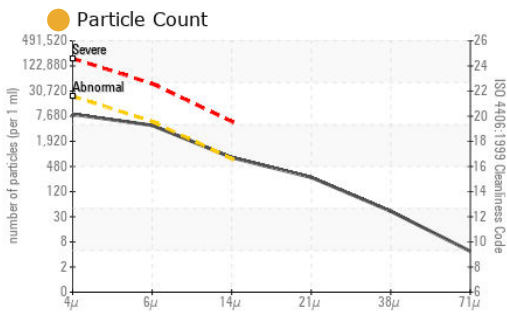

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0956010 **Received** : 15 Jul 2024
Lab Number : 06235746 **Tested** : 16 Jul 2024
Unique Number : 11124580 **Diagnosed** : 16 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK

PO BOX 25
 BUTNER, NC
 US 27509

Contact: Leigh Dennis
 rdennis@thesunrockgroup.com

T: (919)575-4505

F: (919)575-0162