



OIL ANALYSIS REPORT

| | |
|-----------------|----------|
| WEAR | NORMAL |
| CONTAMINATION | ABNORMAL |
| FLUID CONDITION | NORMAL |

Area
Store 2 - Beaver [152477]
Machine Id
PRINOTH T12 935300215
Component
Hydrostatic
Fluid
ATF (24 GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | LEC0047561 | LEC0032367 | --- |
| Sample Date | | Client Info | | 12 Jul 2024 | 15 Jul 2022 | --- |
| Machine Age | hrs | Client Info | | 799 | 330 | --- |
| Oil Age | hrs | Client Info | | 799 | 330 | --- |
| Filter Age | hrs | Client Info | | 799 | 330 | --- |
| Oil Changed | | Client Info | | Not Changd | Not Changd | --- |
| Filter Changed | | Client Info | | Changed | Not Changd | --- |
| Sample Status | | | | ABNORMAL | NORMAL | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|-----|
| PQ | | ASTM D8184 | | 18 | 17 | --- |
| Iron | ppm | ASTM D5185m | >200 | 7 | 6 | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | 0 | --- |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | --- |
| Silver | ppm | ASTM D5185m | | <1 | 6 | --- |
| Aluminum | ppm | ASTM D5185m | >50 | 3 | <1 | --- |
| Lead | ppm | ASTM D5185m | >50 | 3 | 3 | --- |
| Copper | ppm | ASTM D5185m | >200 | 21 | 16 | --- |
| Tin | ppm | ASTM D5185m | >10 | <1 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION











There is a high amount of silt (particulates < 14 microns in size) present in the oil.

| | | | | | | |
|------------------|--------|--------------|-----------|-------------------|-------|-----|
| Silicon | ppm | ASTM D5185m | >50 | <1 | <1 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 0 | --- |
| Water | | WC Method | >0.1 | NEG | NEG | --- |
| Particles >4µm | | ASTM D7647 | >10000 | ▲ 91245 | --- | --- |
| Particles >6µm | | ASTM D7647 | >2500 | ▲ 30568 | --- | --- |
| Particles >14µm | | ASTM D7647 | >320 | 79 | --- | --- |
| Particles >21µm | | ASTM D7647 | >80 | 5 | --- | --- |
| Particles >38µm | | ASTM D7647 | >20 | 0 | --- | --- |
| Particles >71µm | | ASTM D7647 | >4 | 0 | --- | --- |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | ▲ 24/22/13 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | --- |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|-----|
| Sodium | ppm | ASTM D5185m | | 0 | 2 | --- |
| Boron | ppm | ASTM D5185m | | <1 | 4 | --- |
| Barium | ppm | ASTM D5185m | | <1 | <1 | --- |
| Molybdenum | ppm | ASTM D5185m | | <1 | <1 | --- |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | --- |
| Magnesium | ppm | ASTM D5185m | | 76 | 85 | --- |
| Calcium | ppm | ASTM D5185m | | 337 | 20 | --- |
| Phosphorus | ppm | ASTM D5185m | | 386 | 362 | --- |
| Zinc | ppm | ASTM D5185m | | 484 | 334 | --- |
| Sulfur | ppm | ASTM D5185m | | 1434 | 1549 | --- |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.67 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 35.0 | 34.3 | 31.7 | --- |

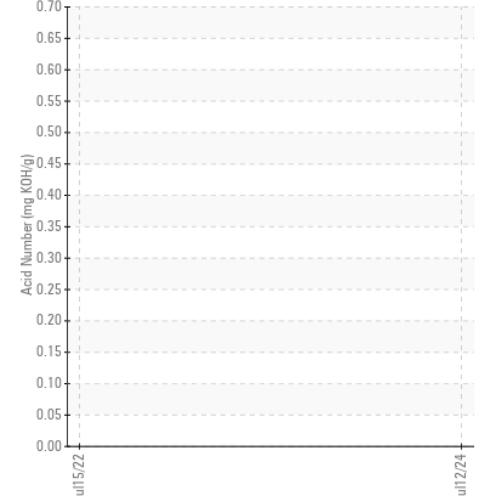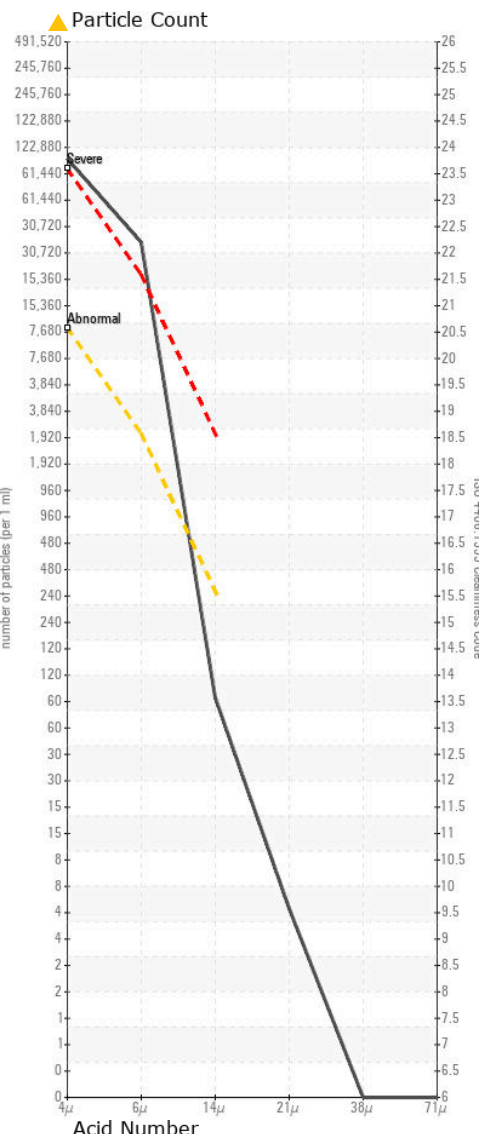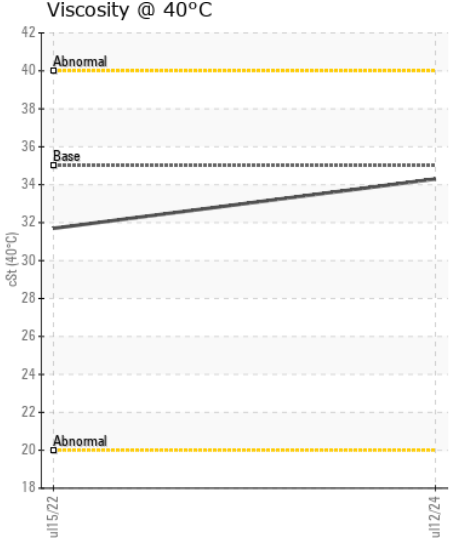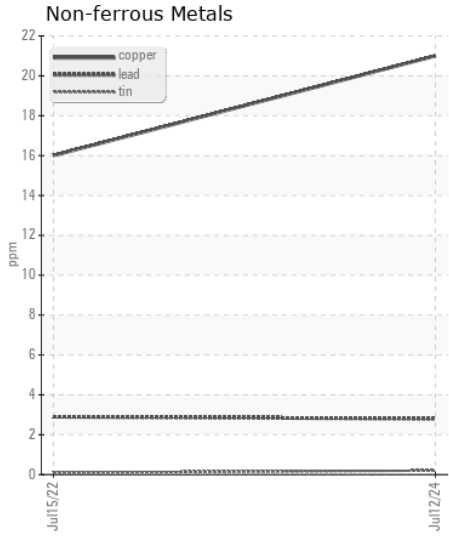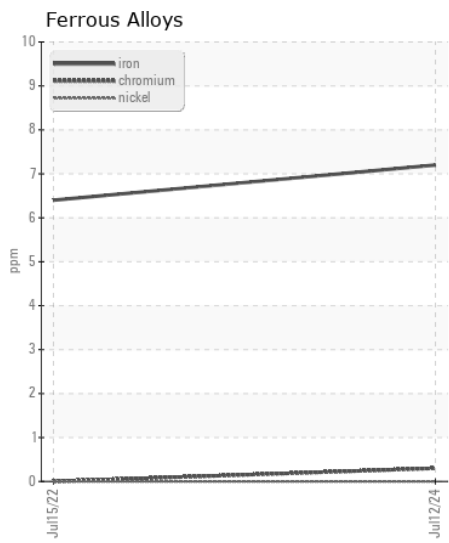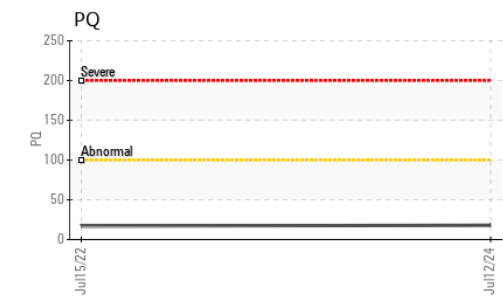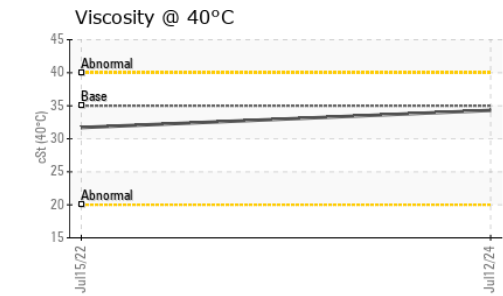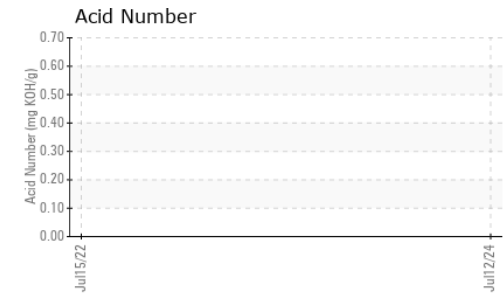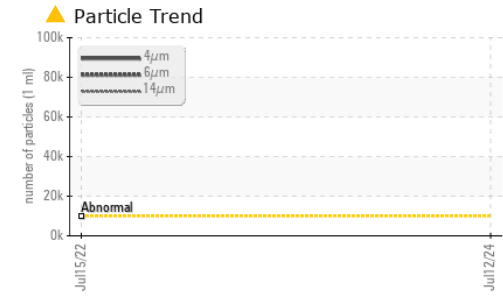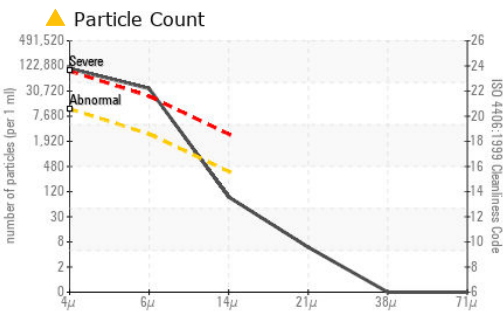

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0047561 **Received** : 15 Jul 2024
Lab Number : **06235812** **Tested** : 16 Jul 2024
Unique Number : 11124646 **Diagnosed** : 16 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ, PrtCount)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)