



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[A35769]
 Machine Id
JOHN DEERE 644P 1DW644PAHLX23590
 Component
Reservoir Hydraulic System
 Fluid
JOHN DEERE HYDRAU (35 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: A35769)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007699	---	---
Sample Date		Client Info		11 Jul 2024	---	---
Machine Age	hrs	Client Info		562	---	---
Oil Age	hrs	Client Info		562	---	---
Filter Age	hrs	Client Info		562	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	2	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>75	1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>20	2	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	1132	---	---
Particles >6µm		ASTM D7647	>1300	282	---	---
Particles >14µm		ASTM D7647	>160	22	---	---
Particles >21µm		ASTM D7647	>40	5	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		15	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		16	---	---
Calcium	ppm	ASTM D5185m	87	559	---	---
Phosphorus	ppm	ASTM D5185m	727	709	---	---
Zinc	ppm	ASTM D5185m	900	938	---	---
Sulfur	ppm	ASTM D5185m	1500	1724	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.72	---	---
Visc @ 40°C	cSt	ASTM D445	65	56.8	---	---

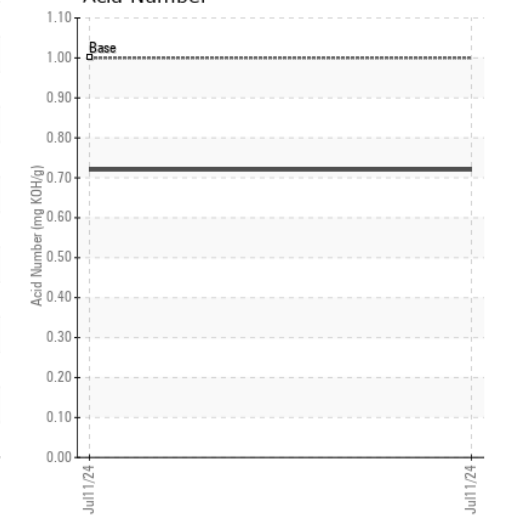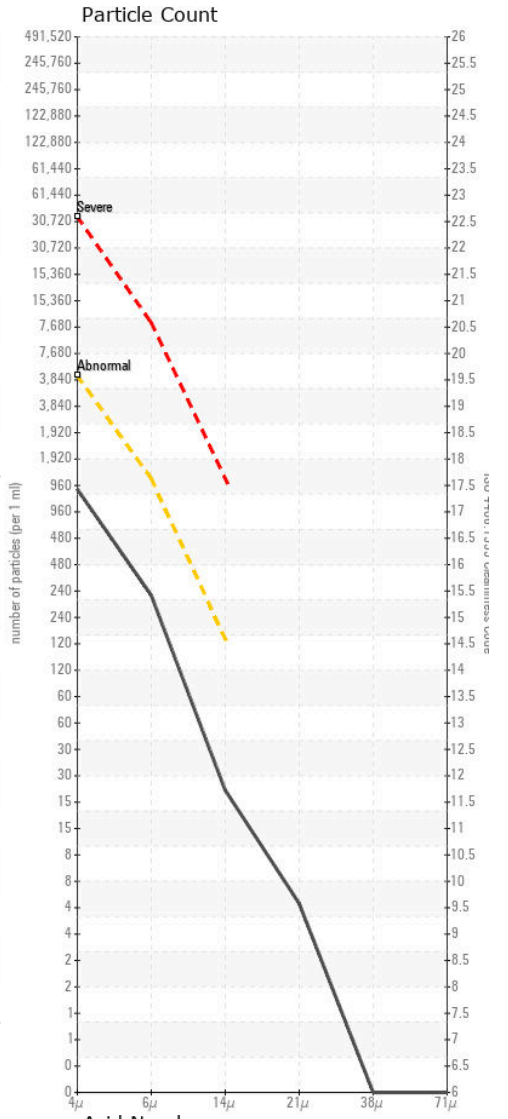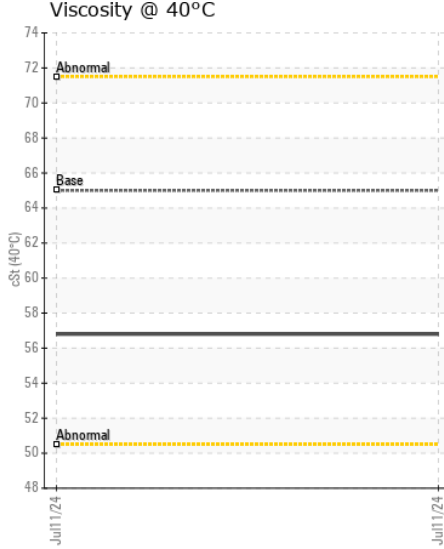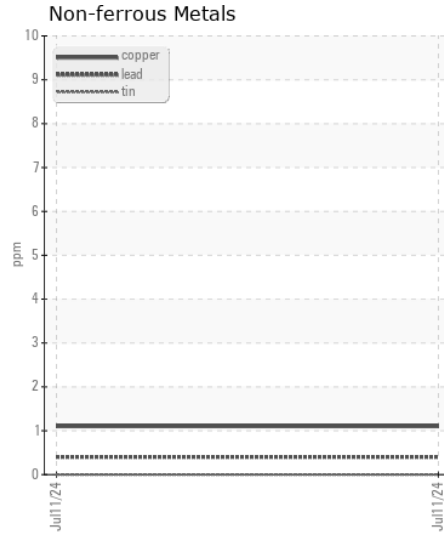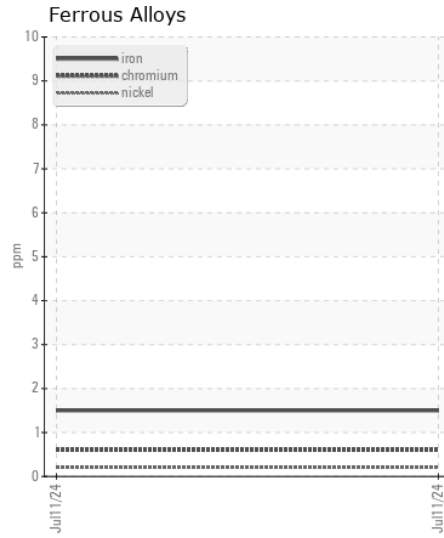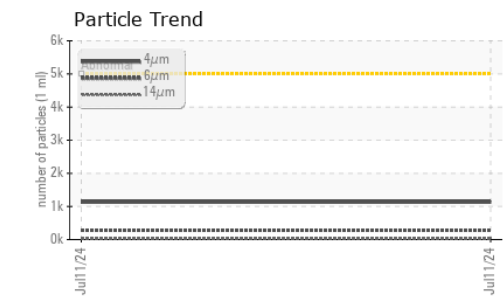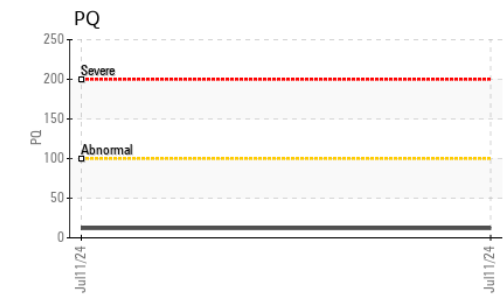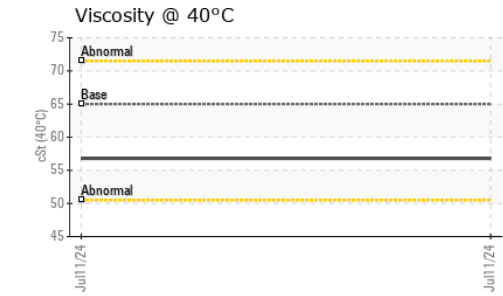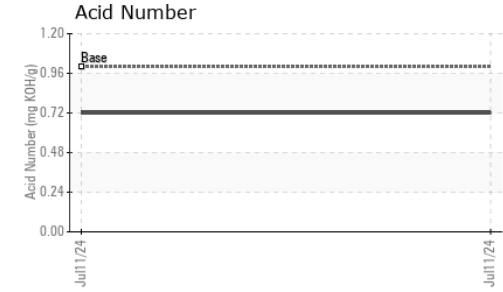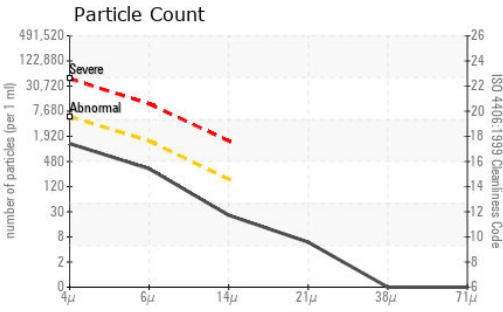

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007699 **Received** : 15 Jul 2024
Lab Number : 06235826 **Tested** : 16 Jul 2024
Unique Number : 11124660 **Diagnosed** : 16 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE
 25135 ONE AVIATION WAY SW
 MADISON, AL
 US 35756
 Contact: BOBBY LUCKY
 warriorparts033@gmail.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)