



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

16
Component
Rear Differential

Fluid
TRC MOLY ULTRA-TEC GEAR OIL 85W140 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR0001674	TR0001313	TR0000744
Sample Date		Client Info		11 Jul 2024	09 Jan 2024	10 Apr 2023
Machine Age	hrs	Client Info		13613	12723	11559
Oil Age	hrs	Client Info		13613	12723	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	48	47	86
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	6	7	4
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	0	0	4
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	29	38	47
Potassium	ppm	ASTM D5185m	>20	1	2	1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	3	3
Boron	ppm	ASTM D5185m		278	270	259
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		15	14	<1
Manganese	ppm	ASTM D5185m		4	5	13
Magnesium	ppm	ASTM D5185m		3	0	5
Calcium	ppm	ASTM D5185m		34	40	14
Phosphorus	ppm	ASTM D5185m		1173	1217	1061
Zinc	ppm	ASTM D5185m		15	10	0
Sulfur	ppm	ASTM D5185m		24845	22026	24670
Acid Number (AN)	mg KOH/g	ASTM D8045		1.57	1.56	1.61
Visc @ 40°C	cSt	ASTM D445		330	340	---
Visc @ 100°C	cSt	ASTM D445	30	27.5	27.4	28.6
Viscosity Index (VI)	Scale	ASTM D2270	105	111	108	---

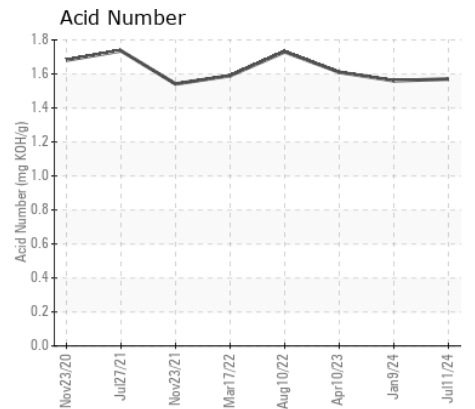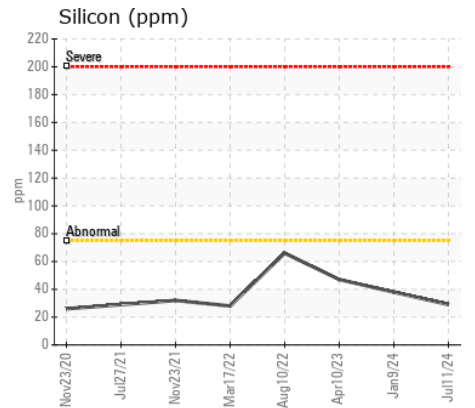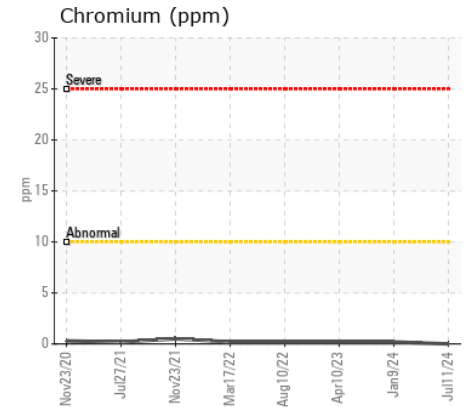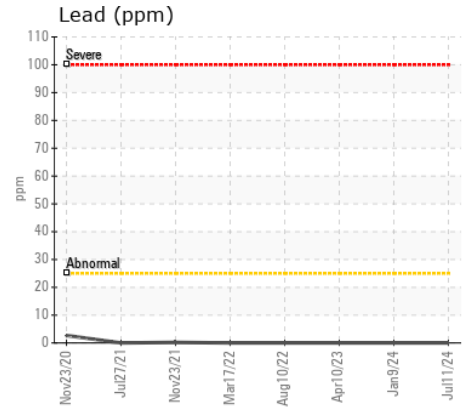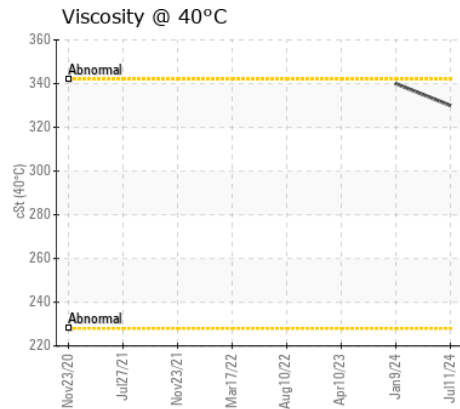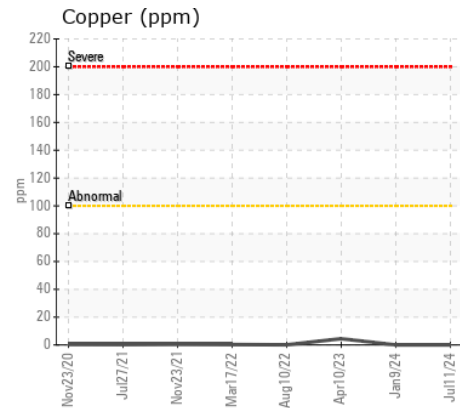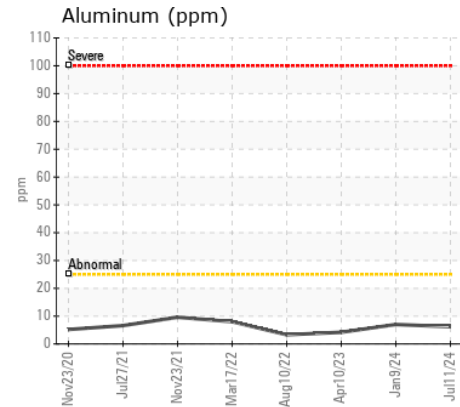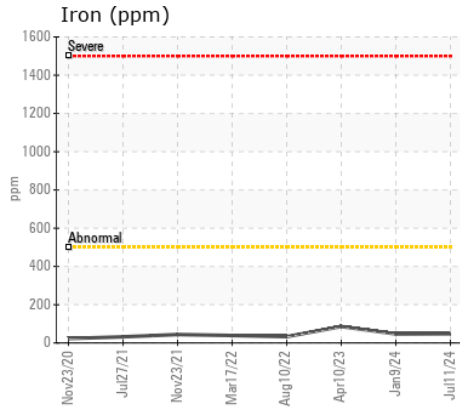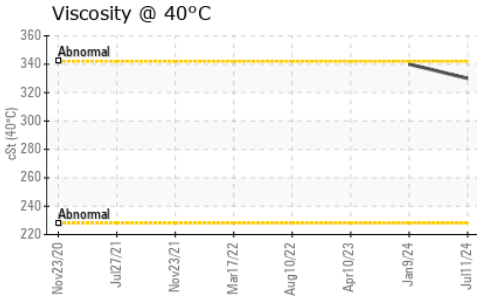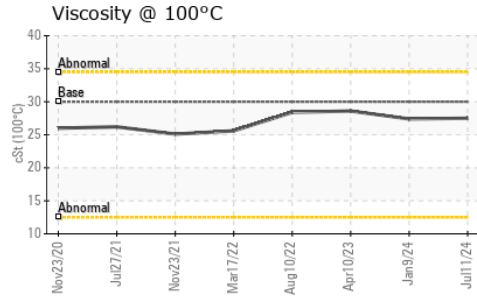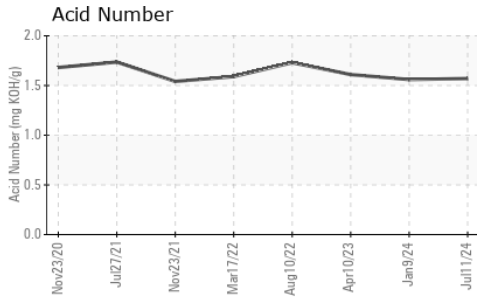

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR0001674
Lab Number : 06236233
Unique Number : 11125067
Test Package : MOB 2 (Additional Tests: KV100, VI)

S S CONCRETE MATERIALS LLC
P.O. BOX 23283
BULLHEAD CITY, AZ
US 86439
Contact: MARK OPHEIM

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (928)754-1991