



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
WARRIOR USED (748L ii) [A35889]
 Machine Id
748 LII (1DW748LBTNF713003)
 Component
Center Transmission (Auto)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: A35889)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007554	---	---
Sample Date		Client Info		11 Jul 2024	---	---
Machine Age	hrs	Client Info		3250	---	---
Oil Age	hrs	Client Info		100	---	---
Filter Age	hrs	Client Info		100	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	21	---	---
Iron	ppm	ASTM D5185m	>160	4	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>50	<1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>225	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	5	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m	6	4	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	145	103	---	---
Calcium	ppm	ASTM D5185m	3570	3505	---	---
Phosphorus	ppm	ASTM D5185m	1290	1047	---	---
Zinc	ppm	ASTM D5185m	1640	1229	---	---
Sulfur	ppm	ASTM D5185m		4019	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	54.3	---	---

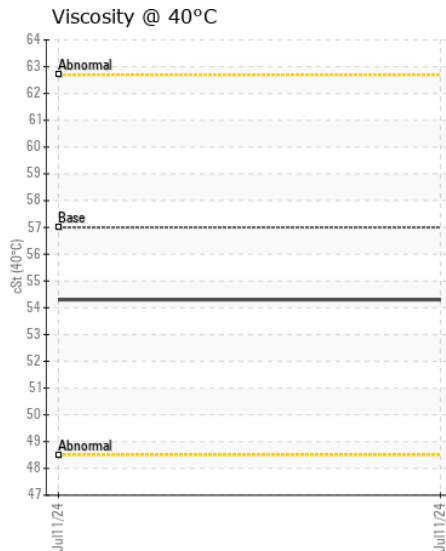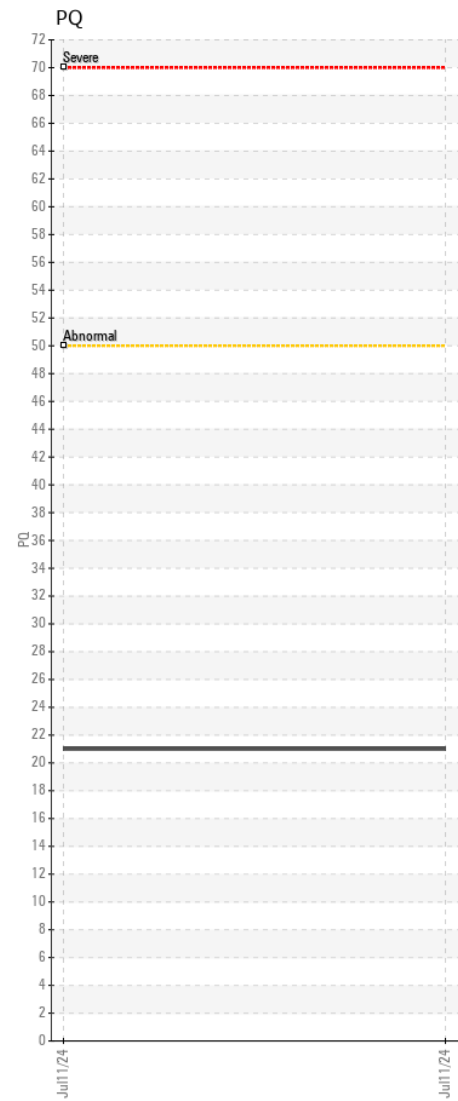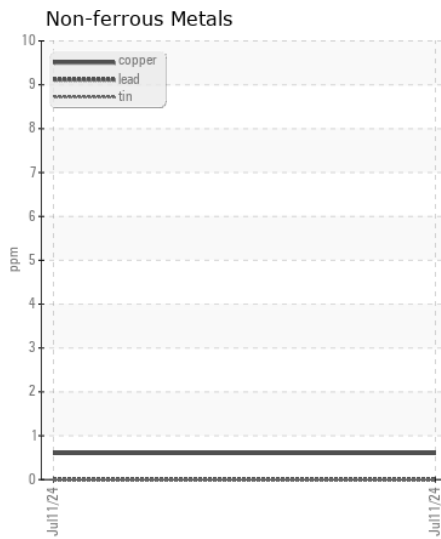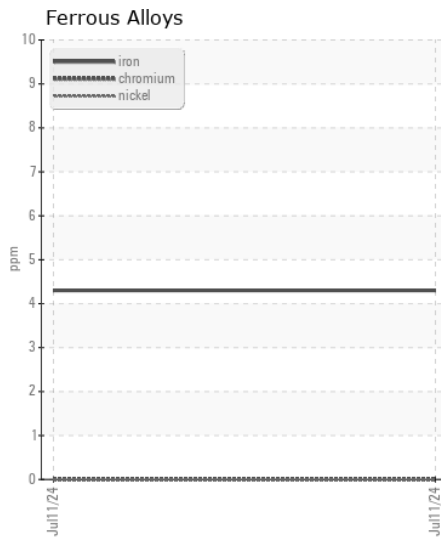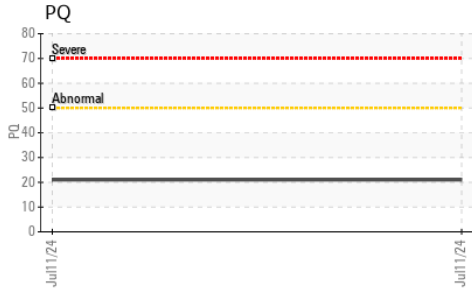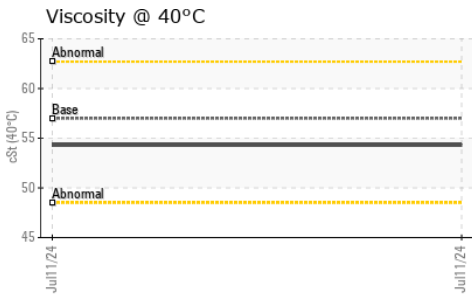

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007554
Lab Number : 06236314
Unique Number : 11125148
Test Package : CONST (Additional Tests: PQ)

Received : 15 Jul 2024
Tested : 16 Jul 2024
Diagnosed : 16 Jul 2024 - Sean Felton

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE
 25135 ONE AVIATION WAY SW
 MADISON, AL
 US 35756
 Contact: HERBERT STONE
 WTE013@WARRIORTRACTOR.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: