



WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
NOT GIVEN JR0220658 (S/N NO INFO ON SIF/BOTTLE)

Component
Right Unknown Component

Fluid
GEAR OIL LS 80W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220658	---	---
Sample Date		Client Info		14 Jul 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Gear wear is indicated.

PQ		ASTM D8184		122	---	---
Iron	ppm	ASTM D5185m		▲ 1369	---	---
Chromium	ppm	ASTM D5185m		▲ 24	---	---
Nickel	ppm	ASTM D5185m		1	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		● 11	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		2	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m		▲ 50	---	---
Potassium	ppm	ASTM D5185m	>20	14	---	---
Water		WC Method		NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

The condition of the sample is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		10	---	---
Boron	ppm	ASTM D5185m	150	0	---	---
Barium	ppm	ASTM D5185m		81	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		13	---	---
Magnesium	ppm	ASTM D5185m	10	18	---	---
Calcium	ppm	ASTM D5185m	70	25	---	---
Phosphorus	ppm	ASTM D5185m	2000	236	---	---
Zinc	ppm	ASTM D5185m	50	14	---	---
Sulfur	ppm	ASTM D5185m	20000	17296	---	---
Visc @ 40°C	cSt	ASTM D445	140	138	---	---

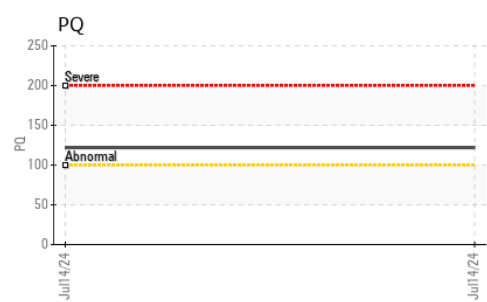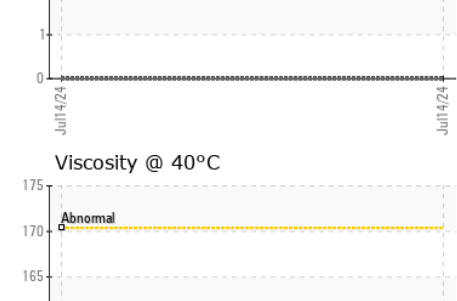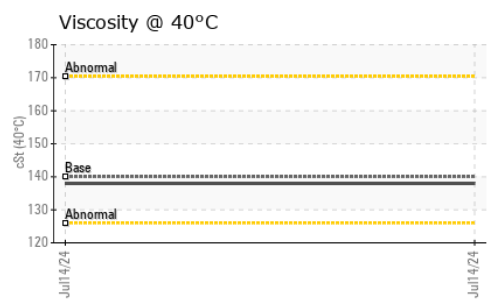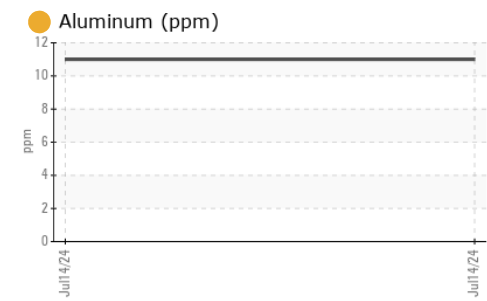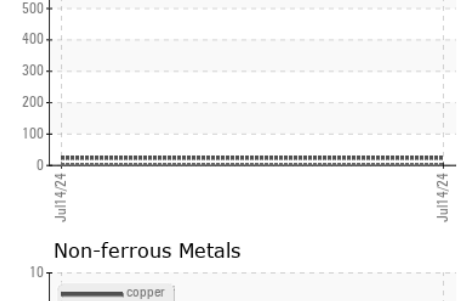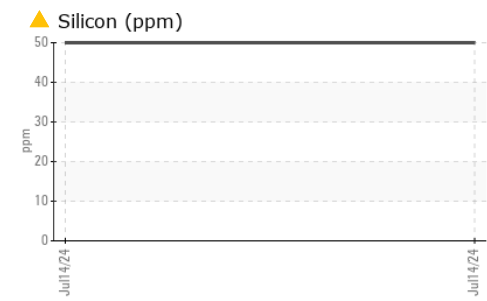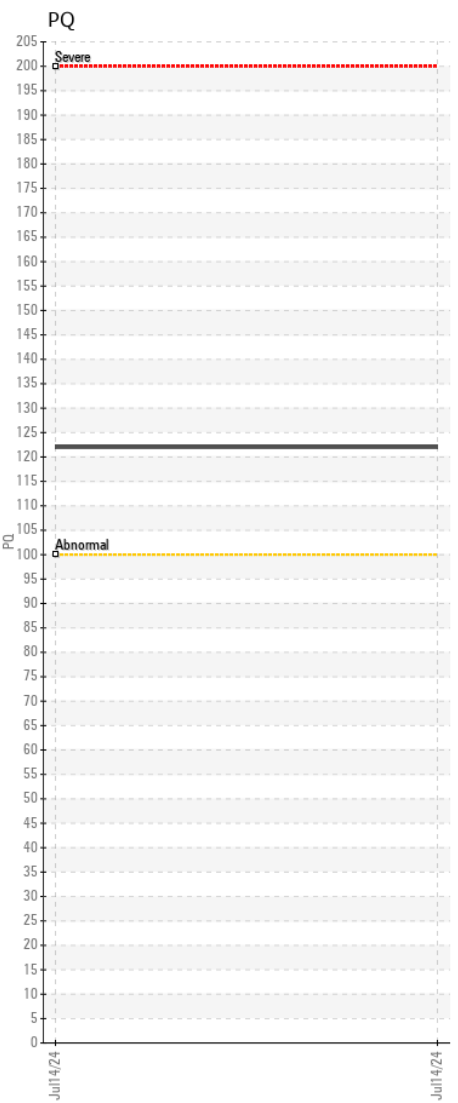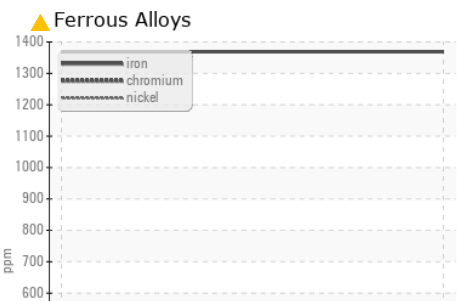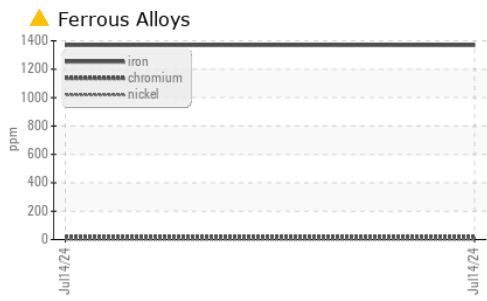

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220658 **Received** : 15 Jul 2024
Lab Number : 06236337 **Tested** : 16 Jul 2024
Unique Number : 11125171 **Diagnosed** : 16 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)