



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE 250G 1FF250GXJMF611693
Component
Swing Drive Gear Case
Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0220450 | JR0205516 | JR0193489 |
| Sample Date | | Client Info | | 09 Jul 2024 | 16 Apr 2024 | 28 Nov 2023 |
| Machine Age | hrs | Client Info | | 4506 | 4105 | 3500 |
| Oil Age | hrs | Client Info | | 401 | 3568 | 500 |
| Filter Age | hrs | Client Info | | 0 | 0 | 500 |
| Oil Changed | | Client Info | | Not Chngd | Changed | Not Chngd |
| Filter Changed | | Client Info | | N/A | N/A | Not Chngd |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| PQ | | ASTM D8184 | | 87 | 65 | 15 |
| Iron | ppm | ASTM D5185m | >200 | 208 | 74 | 6 |
| Chromium | ppm | ASTM D5185m | >10 | 4 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | | 2 | 2 | 2 |
| Lead | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | | 2 | <1 | <1 |
| Tin | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | | 23 | 11 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 2 | <1 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|--|--------------|-------|-------|
| Sodium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Boron | ppm | ASTM D5185m | | 53 | 58 | <1 |
| Barium | ppm | ASTM D5185m | | 5 | 2 | 8 |
| Molybdenum | ppm | ASTM D5185m | | <1 | 8 | <1 |
| Manganese | ppm | ASTM D5185m | | 5 | 1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 2 | 23 | 2 |
| Calcium | ppm | ASTM D5185m | | 0 | 43 | 13 |
| Phosphorus | ppm | ASTM D5185m | | 472 | 547 | 355 |
| Zinc | ppm | ASTM D5185m | | 39 | 25 | 0 |
| Sulfur | ppm | ASTM D5185m | | 14261 | 20909 | 22742 |
| Visc @ 40°C | cSt | ASTM D445 | | 183 | 142 | 141 |

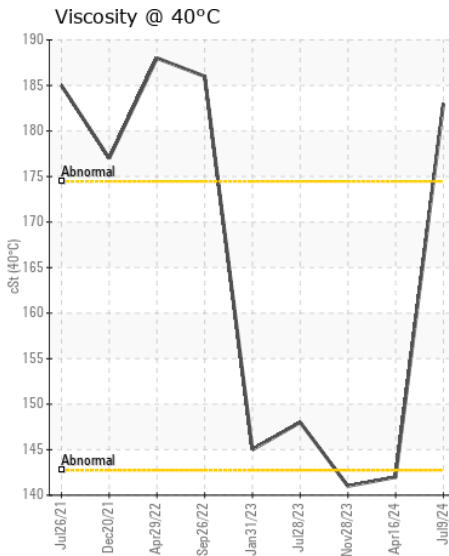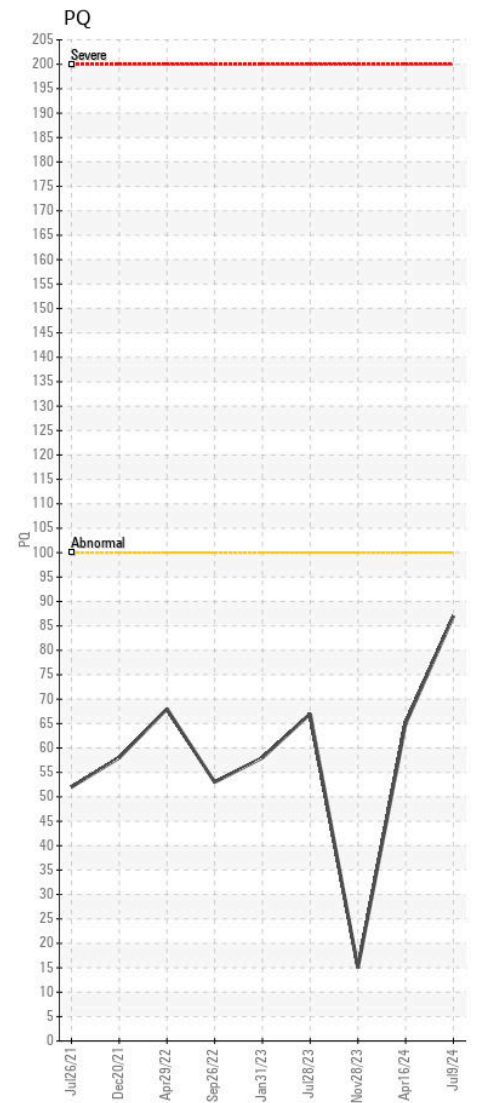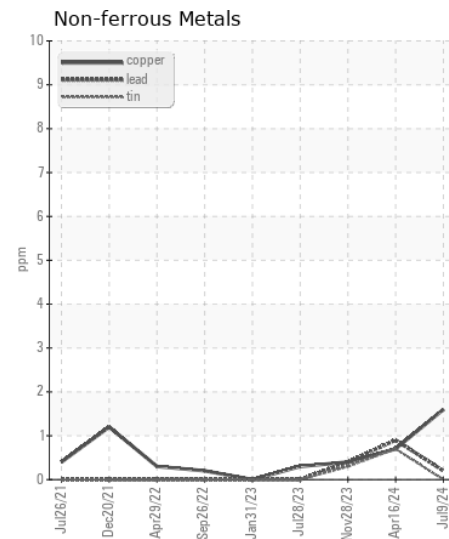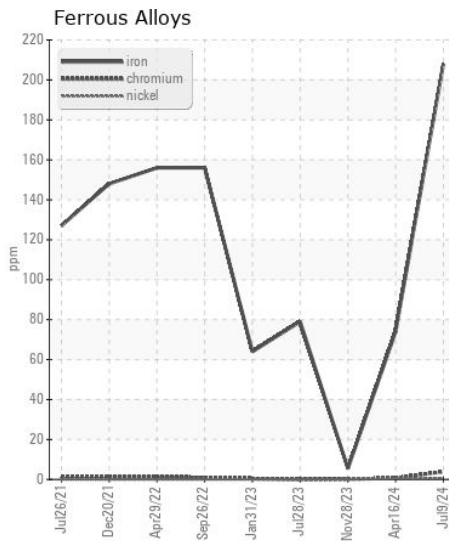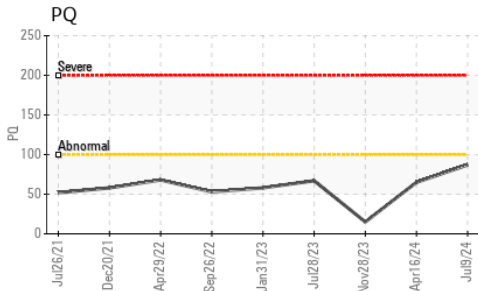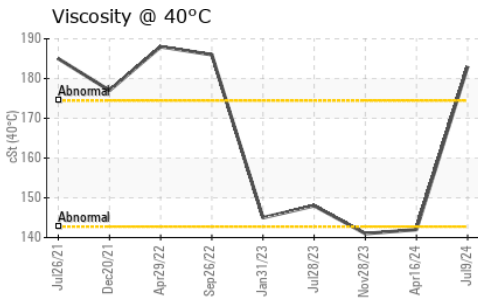

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220450 **Received** : 15 Jul 2024
Lab Number : 06236368 **Tested** : 16 Jul 2024
Unique Number : 11125202 **Diagnosed** : 16 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CK CONTRACTING
 124-1 WOODING PL
 KINGS MOUNTAIN, NC
 US 28086
 Contact: TAM WRIGHT
 twright@ckcdllc.com
 T: (704)730-9948
 F: (704)730-9975