



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
Store 2 - Beaver [152477]
Machine Id
PRINOTH T12 935300215
Component
Pump Drive
Fluid
GEAR OIL SAE 75W90 (0 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | LEC0049862 | LEC0032368 | --- |
| Sample Date | | Client Info | | 12 Jul 2024 | 15 Jul 2022 | --- |
| Machine Age | hrs | Client Info | | 799 | 330 | --- |
| Oil Age | hrs | Client Info | | 469 | 330 | --- |
| Filter Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Changed | | Client Info | | Changed | Changed | --- |
| Filter Changed | | Client Info | | N/A | N/A | --- |
| Sample Status | | | | NORMAL | NORMAL | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|-----|
| PQ | | ASTM D8184 | | 83 | 22 | --- |
| Iron | ppm | ASTM D5185m | >500 | 147 | 36 | --- |
| Chromium | ppm | ASTM D5185m | >15 | 1 | 0 | --- |
| Nickel | ppm | ASTM D5185m | >10 | <1 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | --- |
| Silver | ppm | ASTM D5185m | | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | 2 | --- |
| Lead | ppm | ASTM D5185m | | 3 | 0 | --- |
| Copper | ppm | ASTM D5185m | >35 | 3 | <1 | --- |
| Tin | ppm | ASTM D5185m | >4 | <1 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-----|
| Silicon | ppm | ASTM D5185m | >75 | 15 | 8 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 5 | 2 | --- |
| Water | | WC Method | >0.2 | NEG | NEG | --- |
| Silt | scalar | *Visual | NONE | LIGHT | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-------|--------------|------|-----|
| Sodium | ppm | ASTM D5185m | | 2 | 2 | --- |
| Boron | ppm | ASTM D5185m | 400 | 5 | 5 | --- |
| Barium | ppm | ASTM D5185m | 200 | 5 | 3 | --- |
| Molybdenum | ppm | ASTM D5185m | 12 | <1 | 0 | --- |
| Manganese | ppm | ASTM D5185m | | 4 | 2 | --- |
| Magnesium | ppm | ASTM D5185m | 12 | 11 | 5 | --- |
| Calcium | ppm | ASTM D5185m | 150 | 17 | 14 | --- |
| Phosphorus | ppm | ASTM D5185m | 1650 | 346 | 348 | --- |
| Zinc | ppm | ASTM D5185m | 125 | 37 | 37 | --- |
| Sulfur | ppm | ASTM D5185m | 22500 | 14822 | 6003 | --- |
| Visc @ 40°C | cSt | ASTM D445 | 109 | 129 | 223 | --- |

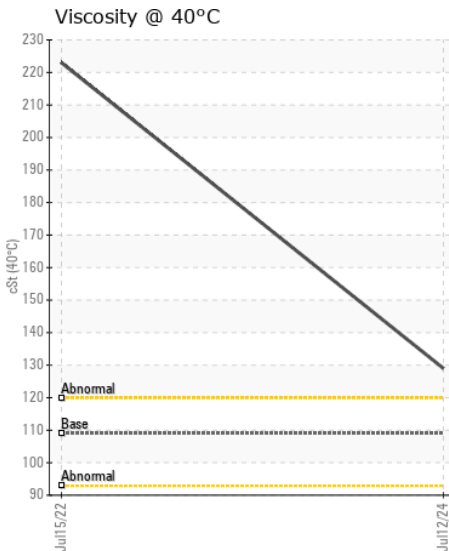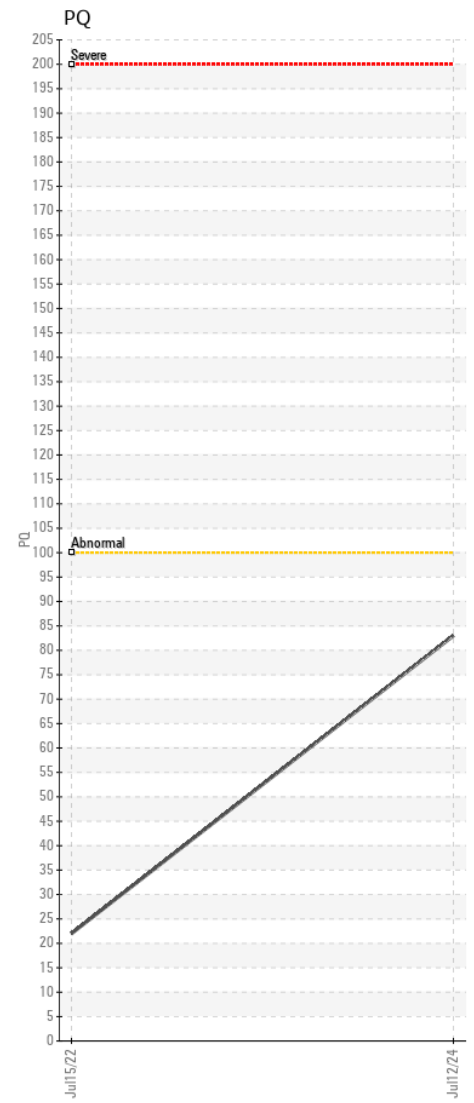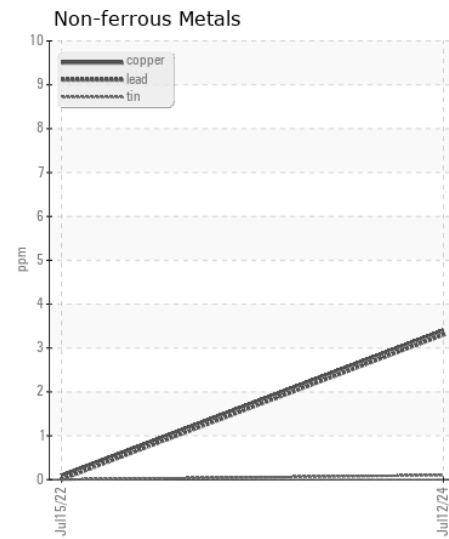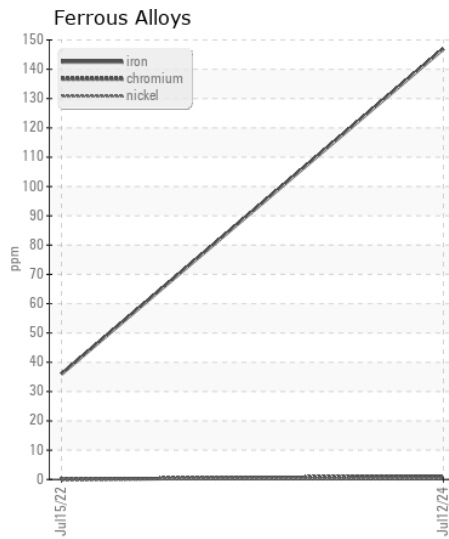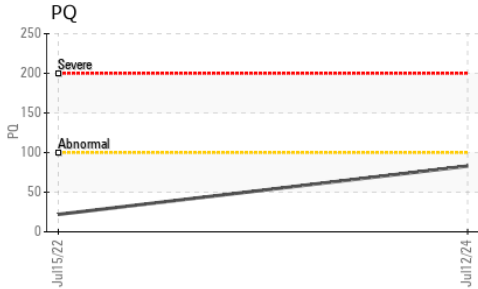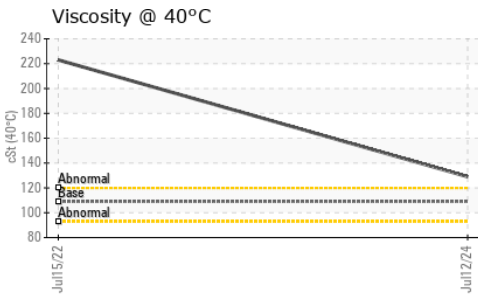

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0049862 **Received** : 15 Jul 2024
Lab Number : **06236437** **Tested** : 16 Jul 2024
Unique Number : 11125271 **Diagnosed** : 17 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570