



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[276792]
 Machine Id
BELL B50E B93A650EH03007613
 Component
Rear Left Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		BE0003148	---	---
Sample Date		Client Info		09 Jul 2024	---	---
Machine Age	hrs	Client Info		4196	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>3000	102	---	---
Iron	ppm	ASTM D5185m	>HR:1=	287	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	7	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	14	---	---
Copper	ppm	ASTM D5185m	>50	8	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>201	10	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>1.01	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>1.01	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	---	---
Boron	ppm	ASTM D5185m	400	51	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	3	---	---
Manganese	ppm	ASTM D5185m		46	---	---
Magnesium	ppm	ASTM D5185m	12	11	---	---
Calcium	ppm	ASTM D5185m	150	110	---	---
Phosphorus	ppm	ASTM D5185m	1650	1034	---	---
Zinc	ppm	ASTM D5185m	125	70	---	---
Sulfur	ppm	ASTM D5185m	22500	17743	---	---
Visc @ 40°C	cSt	ASTM D445	143	123	---	---

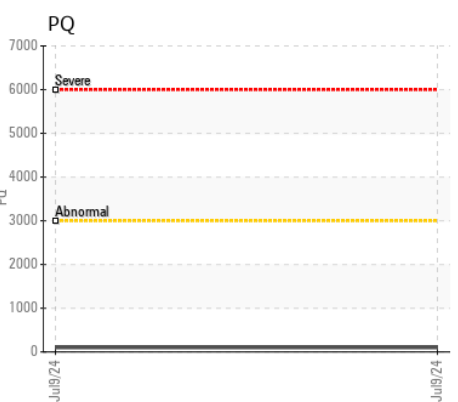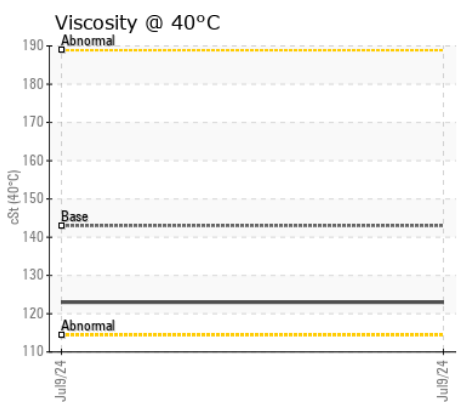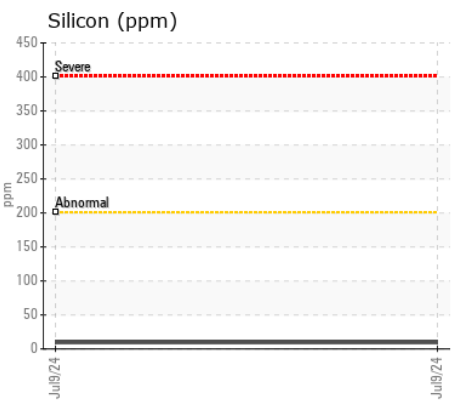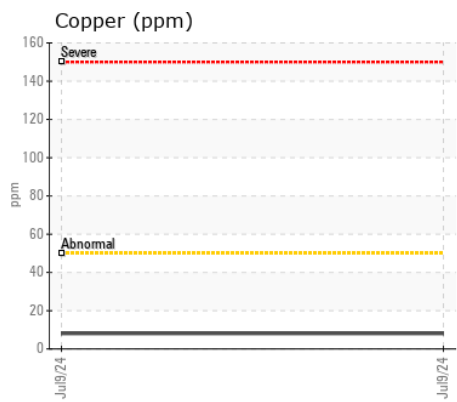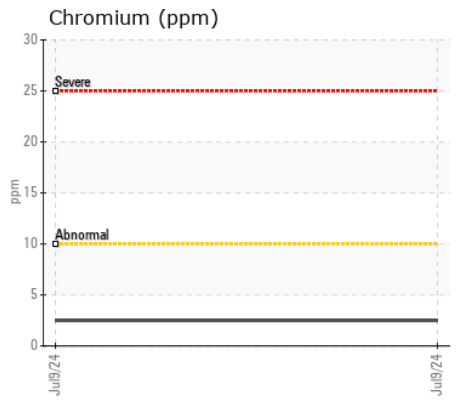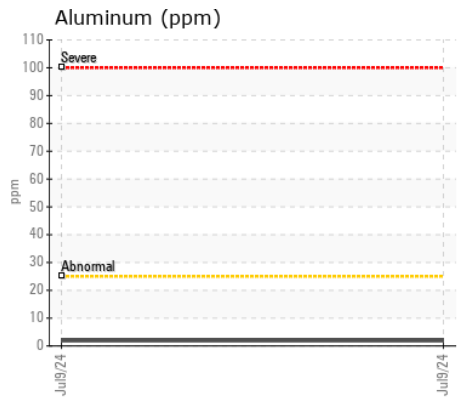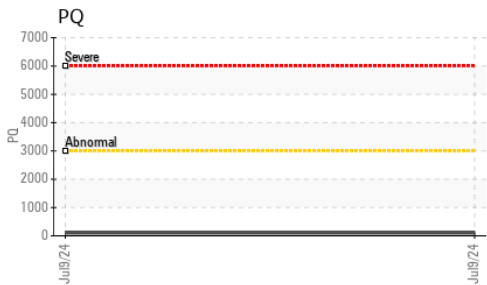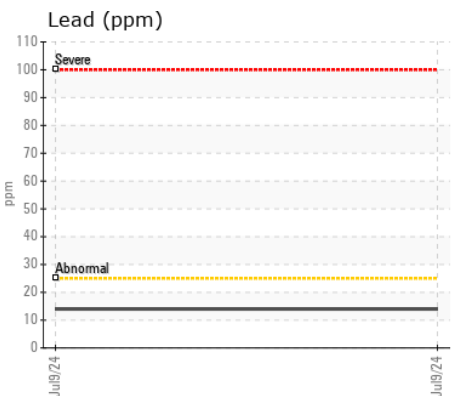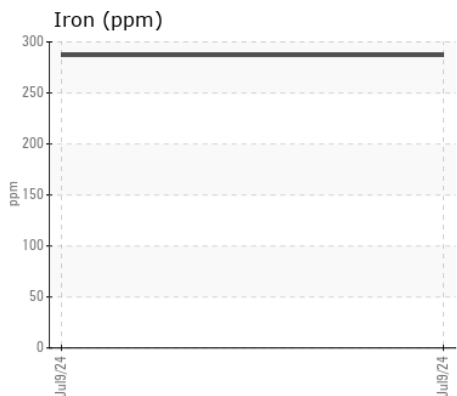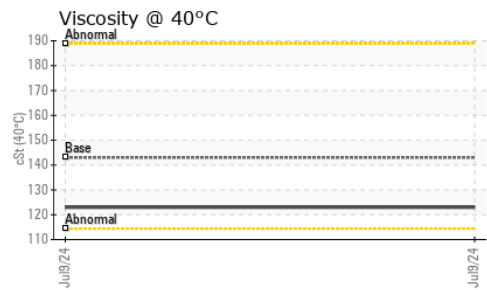

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : BE0003148 **Received** : 15 Jul 2024
Lab Number : 06236464 **Tested** : 16 Jul 2024
Unique Number : 11125298 **Diagnosed** : 17 Jul 2024 - Sean Felton
Test Package : MOBCE

Four Seasons Equipment Inc.
 8111 Mills Road
 Houston, TX
 US 77064
 Contact: Vaughan Phillips
 vphillips@fourseasons-equip.com
 T: (800)234-5007
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)