



# VOLVO

## OIL ANALYSIS REPORT

WEAR  
CONTAMINATION  
FLUID CONDITION

<b>SEVERE</b>
<b>ABNORMAL</b>
<b>NORMAL</b>

Machine Id  
**TAKEUCHI TB235 123601955**  
Component  
**Rear Left Final Drive**  
Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

### WEAR

Gear wear is indicated.












### CONTAMINATION

Elemental level of silicon (Si) above normal indicating ingress of seal material.

### FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP454377</b>	---	---
Sample Date		Client Info		<b>08 Jul 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1610</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>SEVERE</b>	---	---
<hr/>						
Iron	ppm	ASTM D5185m	>500	<b>▲ 2149</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>▲ 26</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>6</b>	---	---
Titanium	ppm	ASTM D5185m		<b>1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>10</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>8</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
<hr/>						
Silicon	ppm	ASTM D5185m	>75	<b>▲ 285</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---
<hr/>						
Sodium	ppm	ASTM D5185m	>170	<b>0</b>	---	---
Boron	ppm	ASTM D5185m	400	<b>122</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>8</b>	---	---
Manganese	ppm	ASTM D5185m		<b>18</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>49</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>363</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1034</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>178</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>23809</b>	---	---
Visc @ 40°C	cSt	ASTM D445	143	<b>241</b>	---	---

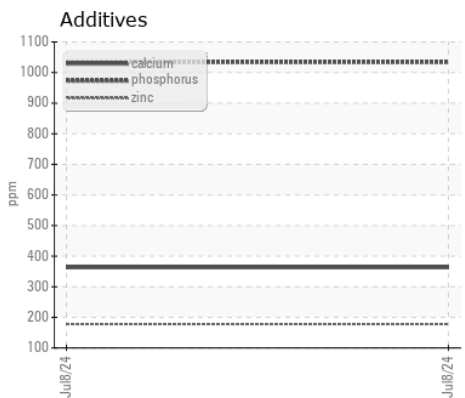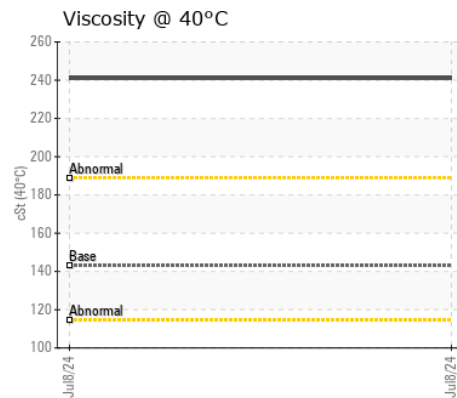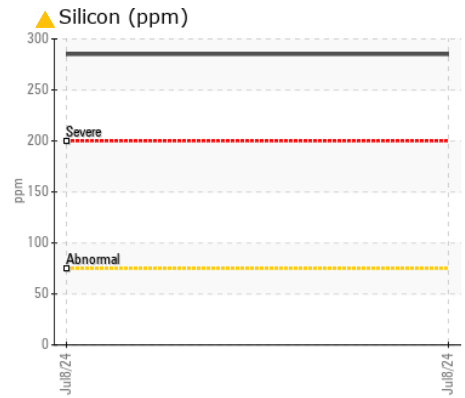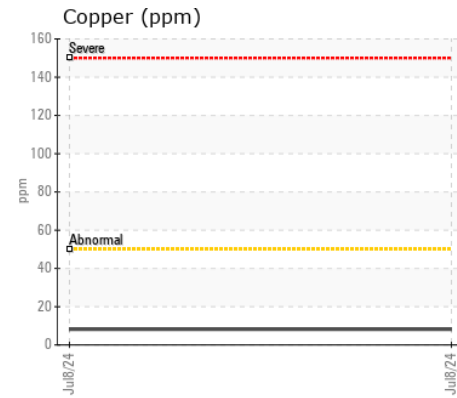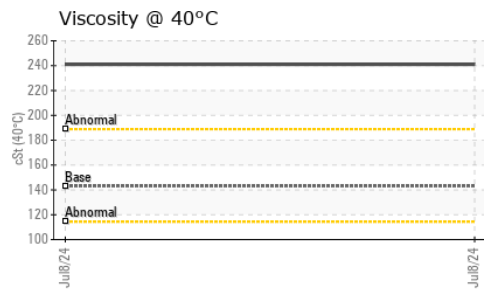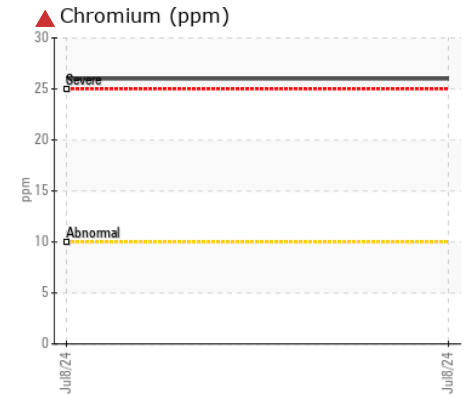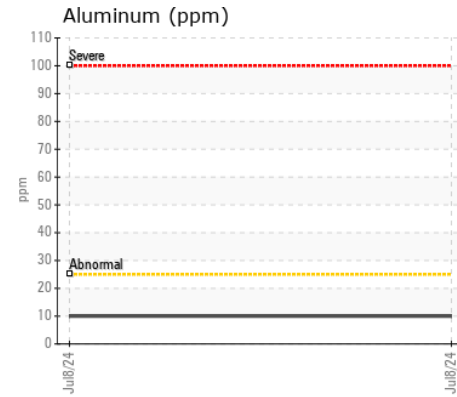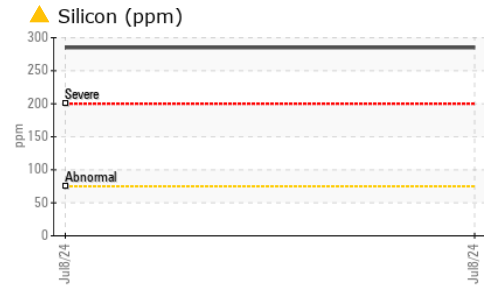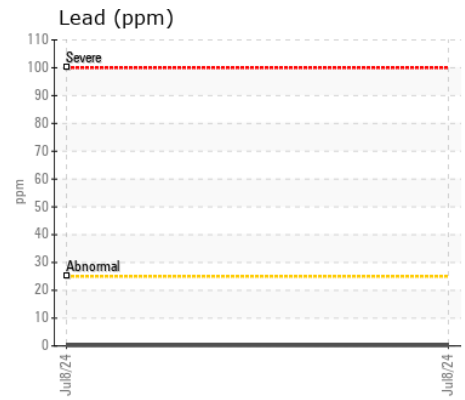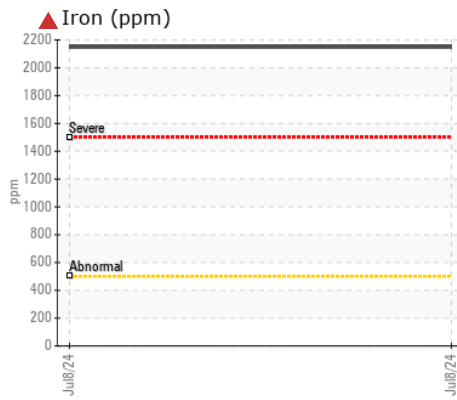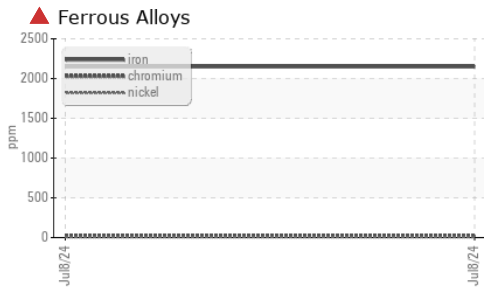

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP454377  
**Lab Number** : 06236491  
**Unique Number** : 11125325  
**Test Package** : MOB 1

**Received** : 15 Jul 2024  
**Tested** : 16 Jul 2024  
**Diagnosed** : 17 Jul 2024 - Sean Felton

**ALTA EQUIPMENT COMPANY**  
 5151 DR MARTIN LUTHER KING BLVD  
 FORT MYERS, FL  
 US 33905  
 Contact: TODD LARK  
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (239)481-3302