



VOLVO

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
VOLVO A45G 352371
Component
Rear Axle
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | VCP436574 | VCP349844 | --- |
| Sample Date | | Client Info | | 10 Jul 2024 | 03 Feb 2022 | --- |
| Machine Age | hrs | Client Info | | 5560 | 2372 | --- |
| Oil Age | hrs | Client Info | | 0 | 0 | --- |
| Filter Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Changed | | Client Info | | Not Changd | Not Changd | --- |
| Filter Changed | | Client Info | | Not Changd | Not Changd | --- |
| Sample Status | | | | NORMAL | NORMAL | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-------|-----|
| Iron | ppm | ASTM D5185m | >900 | 360 | 221 | --- |
| Chromium | ppm | ASTM D5185m | >20 | 6 | 4 | --- |
| Nickel | ppm | ASTM D5185m | >10 | 1 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | --- |
| Silver | ppm | ASTM D5185m | | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >30 | 2 | 4 | --- |
| Lead | ppm | ASTM D5185m | >50 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185m | >150 | 3 | <1 | --- |
| Tin | ppm | ASTM D5185m | >20 | 0 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | --- |
| White Metal | scalar | *Visual | NONE | MODER | LIGHT | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-----|
| Silicon | ppm | ASTM D5185m | >50 | 9 | 5 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | <1 | --- |
| Water | | WC Method | >0.2 | NEG | NEG | --- |
| Silt | scalar | *Visual | NONE | MODER | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-------|--------------|-------|-----|
| Sodium | ppm | ASTM D5185m | >170 | 0 | 0 | --- |
| Boron | ppm | ASTM D5185m | 400 | 155 | 208 | --- |
| Barium | ppm | ASTM D5185m | 200 | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | 12 | 6 | 4 | --- |
| Manganese | ppm | ASTM D5185m | | 9 | 6 | --- |
| Magnesium | ppm | ASTM D5185m | 12 | 29 | 26 | --- |
| Calcium | ppm | ASTM D5185m | 150 | 51 | 51 | --- |
| Phosphorus | ppm | ASTM D5185m | 1650 | 1145 | 1112 | --- |
| Zinc | ppm | ASTM D5185m | 125 | 65 | 36 | --- |
| Sulfur | ppm | ASTM D5185m | 22500 | 25812 | 23651 | --- |
| Visc @ 40°C | cSt | ASTM D445 | 143 | 133 | 135 | --- |

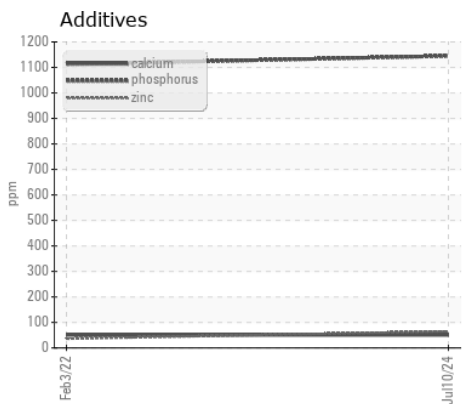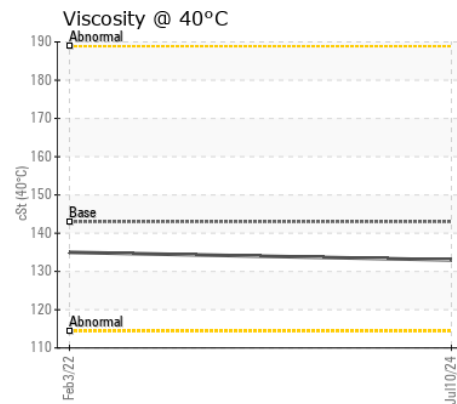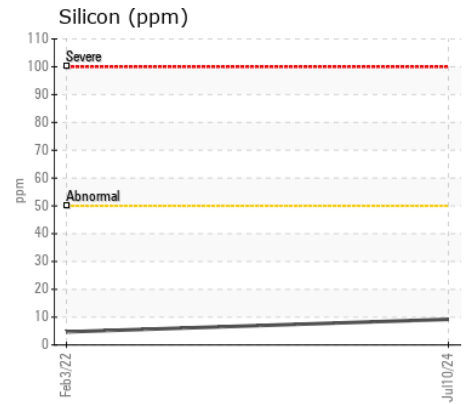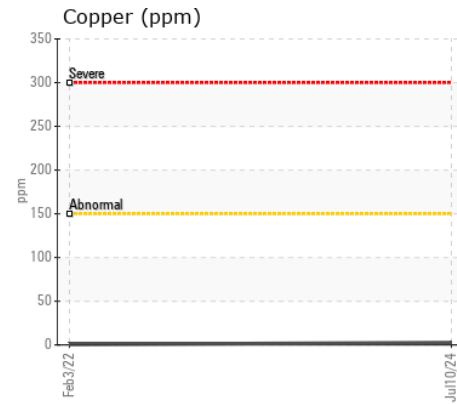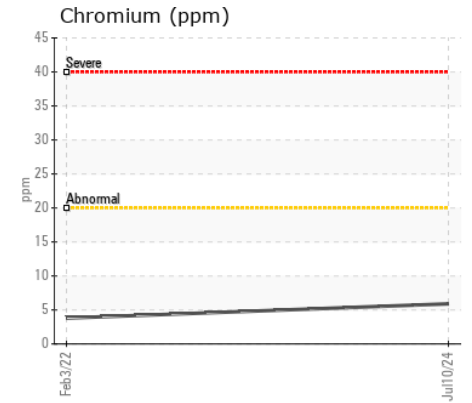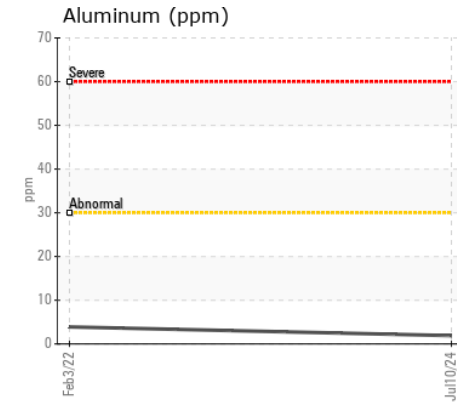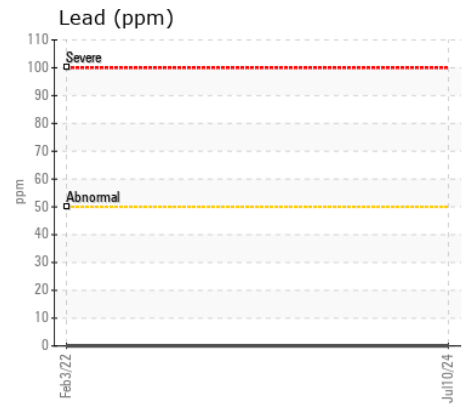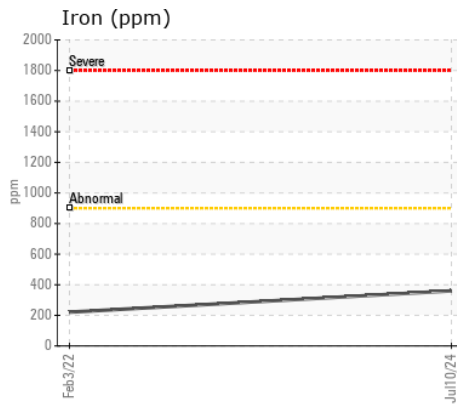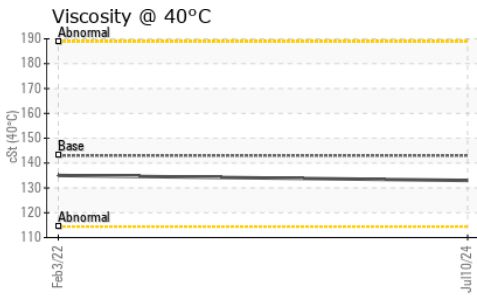

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP436574
Lab Number : 06236496
Unique Number : 11125330
Test Package : MOB 1

Received : 15 Jul 2024
Tested : 16 Jul 2024
Diagnosed : 16 Jul 2024 - Wes Davis

ALTA EQUIPMENT COMPANY
 5151 DR MARTIN LUTHER KING BLVD
 FORT MYERS, FL
 US 33905
 Contact: TODD LARK
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (239)481-3302